

PRODUCT INFORMATION PACKET



Model No: 141179.00

Catalog No: 141179.00

Obsolete in the US,

141347.00..10HP..1800RPM.215TYZ.TEFC.230/460VAC.3PH.60HZ.CONT.40C.1.15 SF.2-Bolt SAE A.C215T17FZ6.....

Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

| | | | |
|------------------------|-------------------|----------------------------|-----------------------------|
| Phase | 3 | Output HP | 10 & 7.50 Hp |
| Output KW | 7.5 & 5.6 kW | Voltage | 230/460 & 190/380 V |
| Speed | 1755 & 1465 rpm | Service Factor | 1.15 & 1.15 |
| Frame | 215TZ | Enclosure | Totally Enclosed Fan Cooled |
| Thermal Protection | No Protection | Efficiency | 89.5 & 91 % |
| Ambient Temperature | 40 °C | Frequency | 60 & 50 Hz |
| Current | 26/13 & 23/11.5 A | Power Factor | 81 |
| Duty | Continuous | Insulation Class | F |
| Design Code | B | KVA Code | G |
| Drive End Bearing Size | 6309 | Opp Drive End Bearing Size | 6206 |
| UL | Recognized | CSA | Y |
| CE | N | IP Code | 43 |
| Number of Speeds | 1 | | |

Technical Specifications


| | | | |
|-----------------------|------------------------------|-----------------------|------------------|
| Electrical Type | Squirrel Cage Inverter Rated | Starting Method | Line Or Inverter |
| Poles | 4 | Rotation | Reversible |
| Resistance Main | 1.05 Ohms | Mounting | Rigid Base |
| Motor Orientation | Horizontal | Drive End Bearing | Ball |
| Opp Drive End Bearing | Ball | Frame Material | Rolled Steel |
| Shaft Type | Single Special Extension | Assembly/Box Mounting | F1 ONLY |
| Inverter Load | CONSTANT 10:1 | | |
| Outline Drawing | 609-0004 | Connection Drawing | A-EE7308-LE |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

Diagram illustrating a quantum circuit with 9 qubits (T1 to T9) and their connections to L1, L2, and L3. The qubits are grouped into three sets: (U1) T1, (V1) T2, (W1) T3; (U2) T4, (U3) T7; (V2) T5, (V3) T8; (W2) T6, (W3) T9. The connections are as follows: T1 is connected to L1, T2 to L2, and T3 to L3. T4 and T7 are connected to a single point. T5 and T8 are connected to a single point. T6 and T9 are connected to a single point.

Diagram illustrating a 3-to-1 multiplexer structure with three 2-to-1 sub-multiplexers:


- Sub-multiplexer 1: Inputs (U1) T1 and (U3) T7; Output L1.
- Sub-multiplexer 2: Inputs (V1) T2 and (V3) T8; Output L2.
- Sub-multiplexer 3: Inputs (W1) T3 and (W3) T9; Output L3.
- Sub-multiplexer 4: Inputs (U2) T4, (V2) T5, and (W2) T6; Output L3.

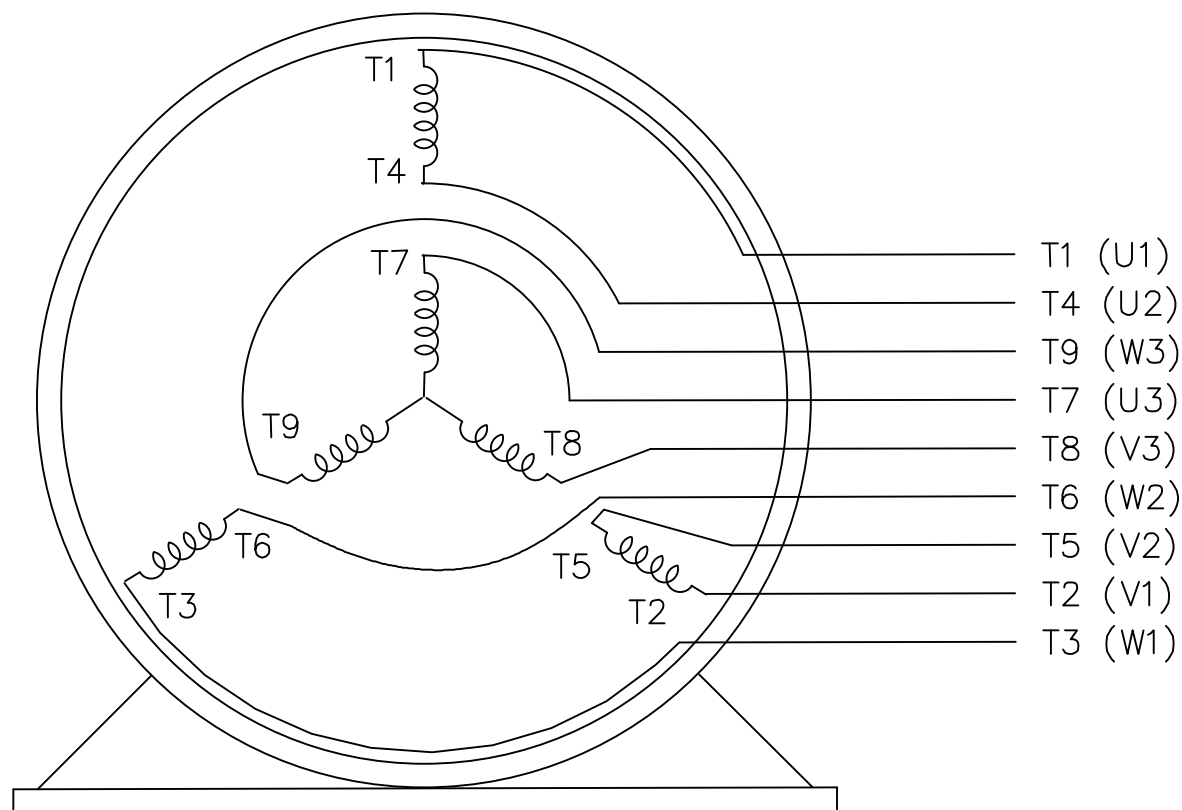

VIEW OF TERMINAL END

REF.
WINDING DIAGRAM

T8Y, T2Y, T2BL, T4BX, T2EC, T2G
T6BZ, T2B, T6BL, T4AV, T6B, T4B

| | | | | | | | | | | | | | | |
|--|---|----------------|-----|--------------------------------|--------|--|---|---|----|------------|----------------------|------|----|------|
| | | | | TOLERANCES UNLESS SPECIFIED | | |  | ELECTRIC MOTORS GEARMOTORS AND DRIVES | | | DRAWN HLB 04-29-2002 | | | |
| | | | | DEC. | INCHES | | | CHK | ML | 05-03-2002 | | | | |
| | | | | .X | ±.1 | | | APPD | GK | 05-03-2002 | | | | |
| | | | | .XX | ±.01 | | | TITLE CONNECTION DIAGRAM 3Ø – DUAL VOLTAGE MOTOR | | | SCALE | 1=1 | | |
| 2 | ADDED IEC NOTATIONS... (U1), (V1) ETC. (MU105786) | REP 01-11-2012 | DR | .XXX | ±.005 | | | | | REF | | | | |
| 1 | NEW DRAWING | HLB 05-03-2002 | ML | .XXXX | ±.0005 | | MAT'L. | | | FMF | | | | |
| NO. | REVISION | BY & DATE | CHK | ANG | ±1/2" | | FINISH | | | PREV | | | | |
| THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT | | | | RFP | | | CAD FILE EE7308-LE | | | SIZE | DRAWING NO. | PAGE | OF | REV. |
| | | | | DIST LB-WP | | | | | | A | EE7308-LE | | | 2 |