PRODUCT INFORMATION PACKET



Model No: 145TTFBD6081 Catalog No: GT3002

Globetrotter® Close-Coupled Pump Motor, 1 HP, 3 Ph, 60 Hz, 200 V, 1200 RPM, 145JM Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Output HP	1 Hp	Output KW	0.75 kW			
Frequency	60 Hz	Voltage	200 V			
Current	4.2 A	Speed	1158 rpm			
Service Factor	1.15	Phase	3			
Efficiency	82.5 %	Power Factor	65			
Duty	Continuous	Insulation Class	F			
Design Code	В	KVA Code	L			
Frame	145JM	Enclosure	Totally Enclosed Fan Cooled			
Thermal Protection	No Protection	Ambient Temperature	40 °C			
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205			
UL	Listed	CSA	Υ			
CE	Υ	IP Code	43			
Hazardous Location	DIVISION 2 T2B	Number of Speeds	1			

Technical Specifications


lectrical Type Squirrel Cage Inverter Rated		Starting Method	Line Or Inverter			
Poles	6	Rotation	Reversible			
Resistance Main	14.2 Ohms	Mounting	Bolt-on Base			
Motor Orientation	Horizontal	Drive End Bearing	Ball			
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel			
Shaft Type	JM	Shaft Diameter	0.875 in			
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 10:1/VARIABLE 10:1			
Connection Drawing	EE7300	Outline Drawing	SS621064-850			


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:11/30/2022

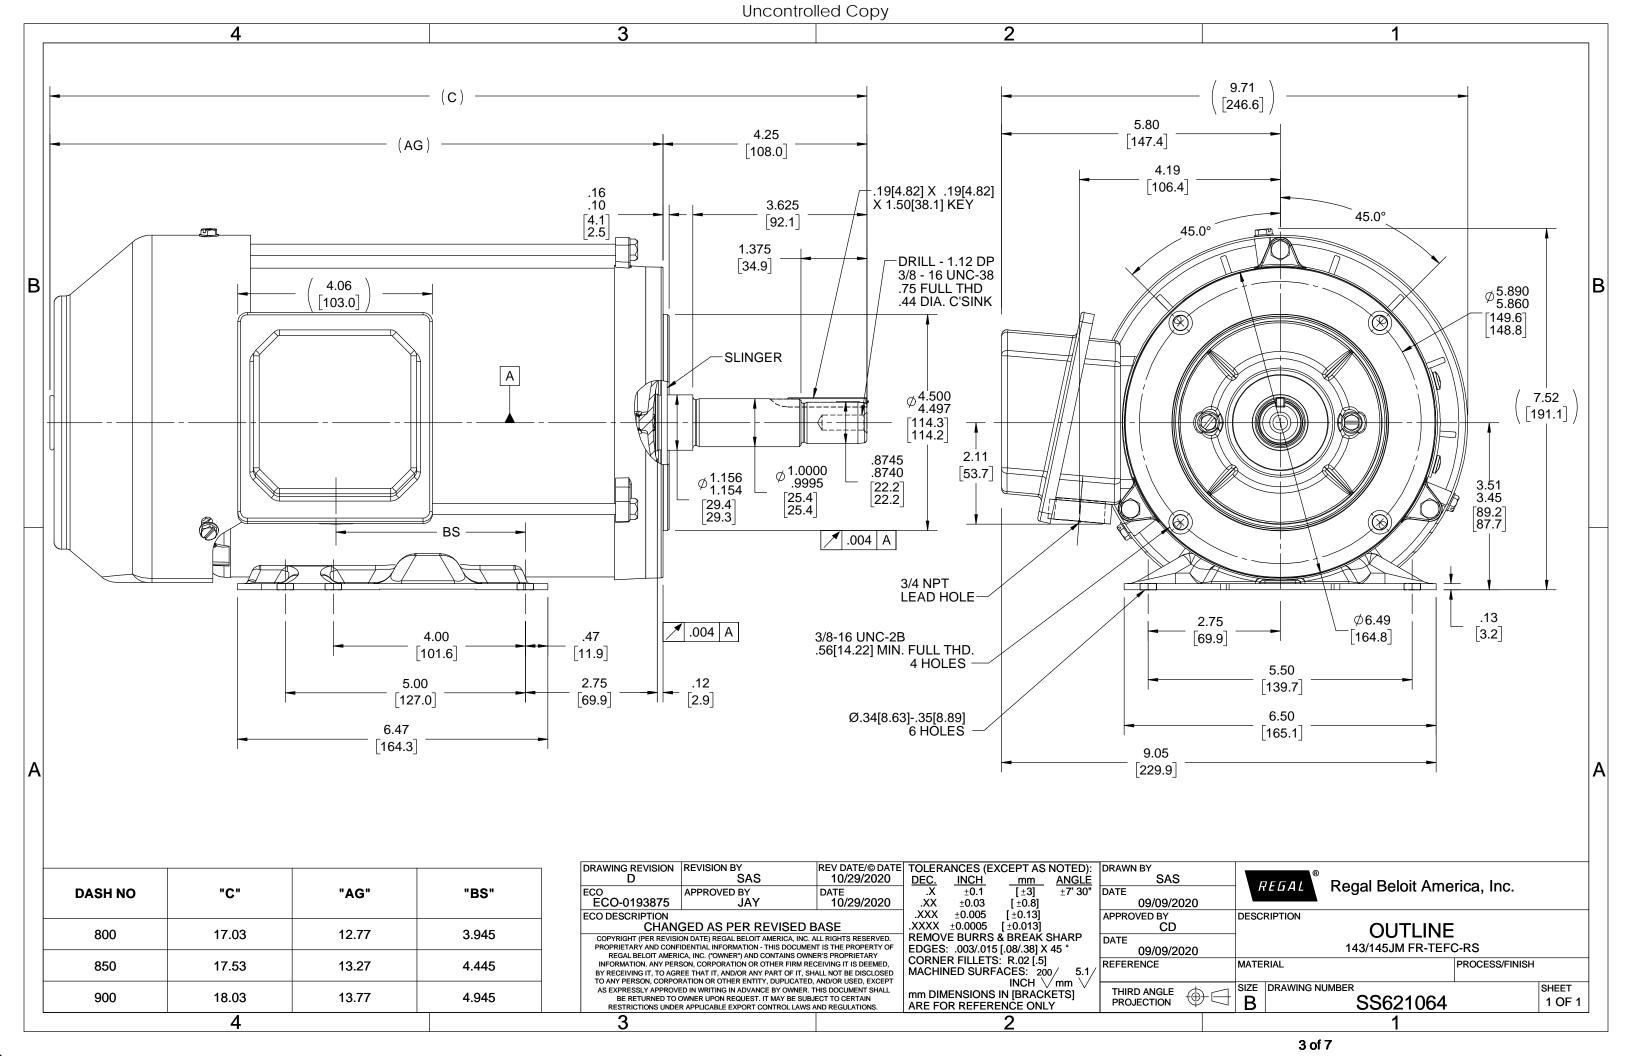



					P.O. BOX 8003								
marathon∘					WAUSAU, WI 54401-8003 PH. 715-675-3311								
						DAT	A VOLTS:	200					
								DAT	A VOLIS:	200			
CERTIFICATION DATA SHEET													
	CUSTOMER:		CUSTOMER P.O. #										
ORDER #		EE7300	<u> </u>			REFERENCE MODEL #: CAT #:							
OUTLINE:		SS621064-850					CUSTOMER PART #:						
WINDING SPEED:	:	HAT6002	FR	4				MOUNTING:	F1/F2 CAP	PABLE			
0. 220.				TY	YPICAL	MOTOR PERFORMA	NCE D	ATA					
HP	ĸw	SYNC RPM	FL	L RPM FRAME		ENCLOSURE TY		TYPE	KVA CODE		DESIGN		
1	0.75	1200	1	158		145JM	TEFC		TFR	L		В	
<u> </u>													
PH	HZ	VOLTS		MPS		START TYPE		OUTY	INSL	S.F.	AMB 40	ELEV.	
3	60	200	4	.15		LINE OR INVERTER		ONT	F	1.15		3300	
	F.L. EFF		3/4 LD EFF	81.5		1/2 LD EFF	78.5	GTD EFF		ELECT.			
	F.L. PF	65.0	3/4 LD PF	56.0		1/2 LD PF	43.0	80.0		SQ CAGE IN	IV RATED		
F.I	TORQUE	LR AMPS @	460 V	L.R. TORQUE		TORQUE	B.D. TORQUE			F.L. RISE (° C)			
4.5	LB-FT	28.8		15.0 I	LB-FT	333%	16.2	LB-FT	360%	50			
SOUND	PRESSURE @ 3												
L	FT.	SOUND POWER		OR WK²		MAX. LOAD WK ²		TALL TIME		STARTS/HOUR	APROX.	MOTOR WGT	
62	dBA	71 dBA	0.13	LB-FT ²	5	LB-FT ²	30	SEC.	2		48	LB.	
					*** SU	PPLEMENTAL INFORMA							
DE BF	RACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	MOTOR ORIEN	RIENTATION SEVERE DUTY			ARDOUS CATION	DRIP COVER SCREENS		PAINT		
	C-FACE	STANDARD	BOLT-ON	HORIZON			N	IONE	YES NONE		BLUE (ENAMEL)		
Е	EARINGS	GREASE	01145	T TYPE		SPECIAL DE	005	IAL ODE					
DE	ODE	GREASE	ЗПАГ	IIIPE	SPECIAL DE		SPEC	IAL ODE	SHA	AFT MATERIAL		FRAME MATERIAL	
BALL 6206	BALL 6205	POLYREX EM		JM NONE		NONE		1045	1045 HOT ROLLED (C-204)		ROLLED STEEL		
	•			+									
THERMOSTATS PROTECT		PROTECTORS	WDG	G RTD's BRG RTD's		THER	MISTORS	CONTROL		SPAC	E HEATERS		
	NONE	NOT	N	ONE NONE			IONE	FALSE			NA		
R1	(ohms/ph)	R2 (ohms/ph)	X1 (nl	ohms/ph) X2 (ohms/ph)		Xm (ohms/ph)	VIBRATION (in/sec)		FLOAT			
	.29905482	0.268620038		3657845 0.577693762			8771267	0.150		ODE			
N	N					INVERTER TORQUE: CONSTANT 10:1/VARIABLE 20:1							
О Т							INV. HP SPEED RANGE: NONE						
E							ENCODER: NONE						
S					NONE								
*							NONE NONE PPR BRAKE: NONE					PPR	
PREPARED BY:				NONE NONE									
1	DATE: 2/22/2022					FT-LB: NA VOLTAGE: NONE HZ:							
FORM: 3531 REV 4 2/27/06				UL: V - LI,ME-INS,CONST UL REC									

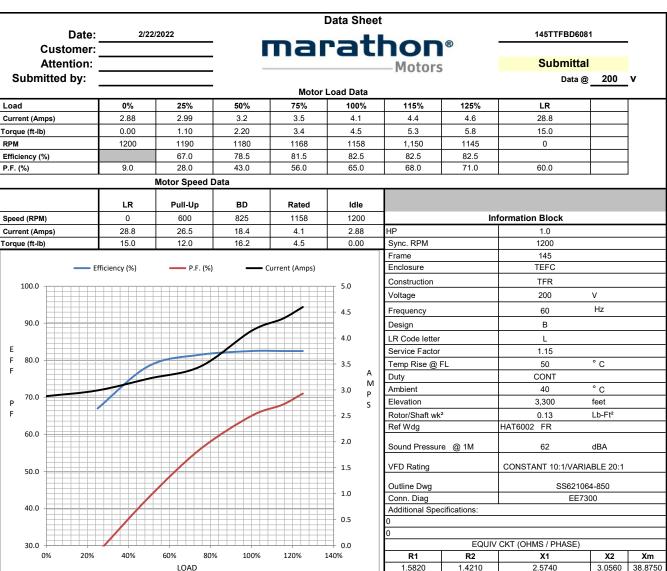

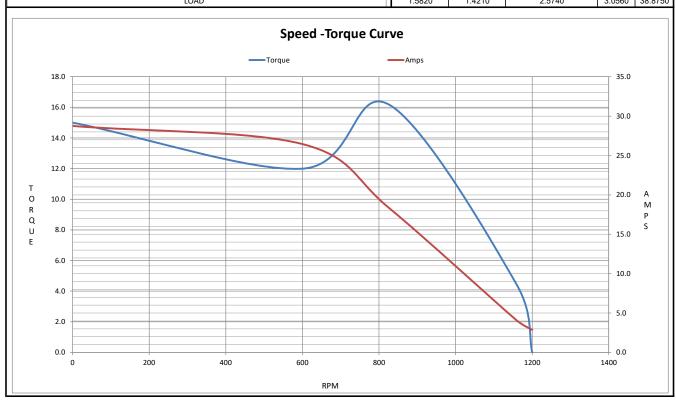



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 145TTFBD6081

(Model No. may contain prefix and/or suffix characters)

Catalog No: GT3002

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A Logodon

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

J. cers

Authorized Representative in the Community:

C€ 22