

PRODUCT INFORMATION PACKET



Model No: 170146.00

Catalog No: 170146.00

General Purpose Motor, 10 & 7.50 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V, 1200 & 1000 RPM,
256T Frame, DP



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

Phase	3	Output HP	10 & 7.5 Hp
Output KW	7.5 & 5.6 kW	Voltage	208-230/460 & 190/380 V
Speed	1185 & 985 rpm	Service Factor	1.15 & 1.15
Frame	256T	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	91.7 & 91.7 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	31-29.6/14.8 & 27.6/13.8 A	Power Factor	68.5
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	G
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6208
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	.7605 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	T	Overall Length	22.60 in
Shaft Diameter	1.625 in	Shaft Extension	4 in
Assembly/Box Mounting	F1 Only		
Connection Drawing	004172.01	Outline Drawing	16955160-256T

Technical drawing of a motor assembly, showing front, side, and end views with dimensions and labels.

Front View Dimensions:

- Overall width: "C" ± 12
- Overall height: 12.430 $\pm .06$
- Top mounting flange diameter: 2.441
- Distance from top flange to centerline: "BV" $\pm .06$
- NAMEPLATE location: 4.250 from centerline
- Distance from centerline to shaft center: 4.000
- Shaft diameter: $\phi 1.6245$
- Shaft length: 3.000 FULL DEPTH
- Shaft flinger dimension: 1.416 $+0.000$ -0.003
- Distance from centerline to base: 1.6250
- Base width: 8.250 (254T) $+0.05$ -0.00
- Base height: 10.000 (256T) $+0.05$ -0.00
- Distance from base to centerline: 4.250 $\pm .09$
- Overall width at base: "B"

Side View Dimensions:

- Overall width: 9.920 $\pm .09$
- Distance from centerline to shaft center: 8.350 $\pm .09$
- Key dimension: .38 SQ. x 2.88 KEY
- Shaft flinger dimension: 1.416 $+0.000$ -0.003
- Distance from centerline to base: 1.6250
- Base width: 8.250 (254T) $+0.05$ -0.00
- Base height: 10.000 (256T) $+0.05$ -0.00
- Distance from base to centerline: 4.250 $\pm .09$
- Overall width at base: "B"

End View Dimensions:

- Overall diameter: 12.500
- Distance from centerline to shaft center: 6.249 $+0.000$ -0.060
- Distance from centerline to base: 1.6250
- Base width: 8.250 (254T) $+0.05$ -0.00
- Base height: 10.000 (256T) $+0.05$ -0.00
- Distance from base to centerline: 4.250 $\pm .09$
- Overall width at base: "B"

Labels:

- NAMEPLATE
- SHAFT FLINGER
- $\phi 1.25$ NPT CONDUIT HOLE

FRAME	"C"	"BV"	"B"
254T	20.94	8.23	10.25
256T	22.60	9.06	12.00

7/6/2007 8:13:15 AM -

ERROR: undefined
OFFENDING COMMAND: fora



STACK:

```
{dup type /operatortype eq {[ exch ] cvx def }{pop pop }ifelse }  
-dictionary-  
-dictionary-  
/Pscript_WinNT_Compat  
-dictionary-
```


WYE - DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

LOW VOLTAGE CONNECTION

HIGH VOLTAGE CONNECTION

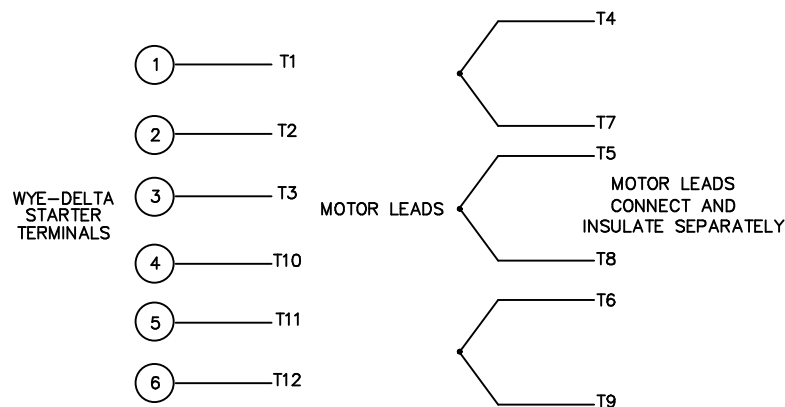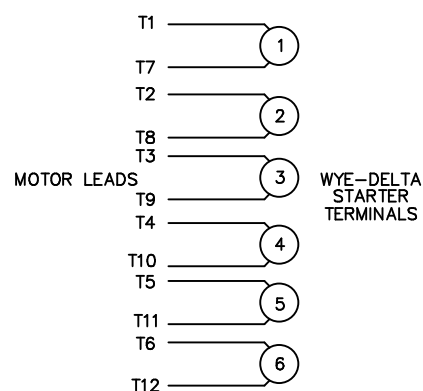


REFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

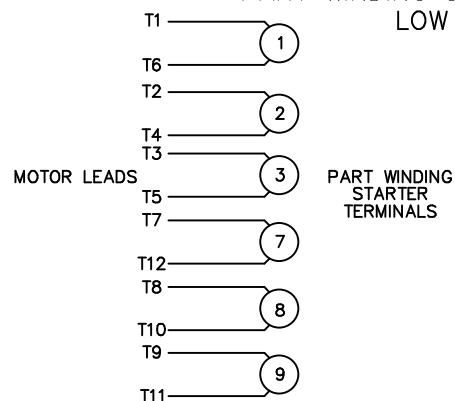PART WINDING START USABLE ON 4 & 6 POLE MOTORS
LOW VOLTAGE CONNECTION ONLY

REFER TO THE PART WINDING STARTER INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

REFER TO THE CUTLER - HAMMER OR EQUIV. FOR PROPER SELECTION OF OVERLOAD HEATER COILS.

LINE LEADS

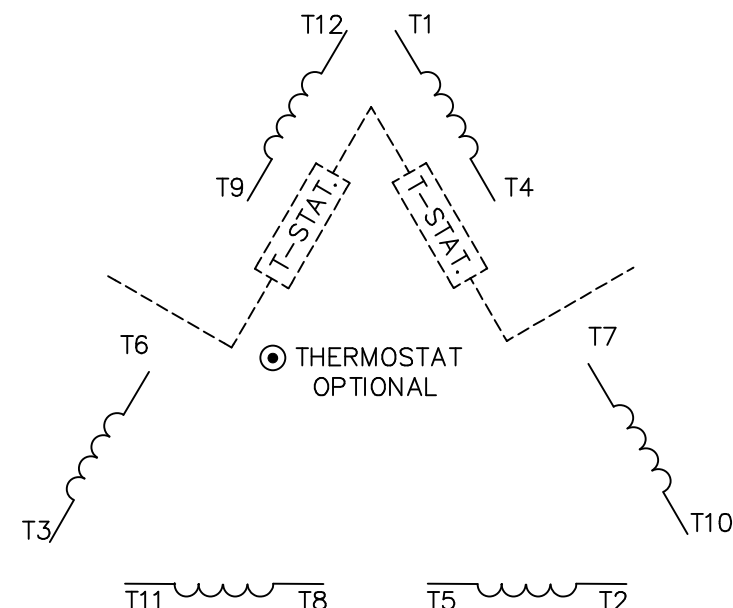

ROTATION CAN BE REVERSED BY INTERCHANGING ANY TWO LINE LEADS
 ● RED LEADS OR P1, P2, FOR N/C THERMOSTAT

ACROSS THE LINE START & RUN

	LINE 1	LINE 2	LINE 3	JOIN & INSULATE SEPARATELY
HIGH VOLT	T1,T12	T2,T10	T3,T11	(T4,T7) (T5,T8) (T6,T9)
LOW VOLT	T1,T6 T7,T12	T2,T4 T8,T10	T3,T5 T9,T11	

TOLERANCES
UNLESS SPECIFIED

DEC. INCHES

.X ±.1

.XX ±.01

.XXX ±.005

.XXXX ±.0005

ANG ±1/2"



ELECTRIC MOTORS
GEARMOTORS
AND DRIVES

DRAWN WLW 09/08/77

CHK RPB 09/12/77

APPD JCW 09/12/77

SCALE 1=1

REF

FMF

PREV

NO.	REVISION	BY & DATE	CHK	ANG
03	REV'D LOW VOLTAGE CONN. LEADS PER ELEC.	BJB 06/07/00	.XX	±.01
02	ADDED T-STAT. NOTES PER ELECTRICAL	KMM 06/02/98	.XXX	±.005
01	REDRAWN TO CAD	DBT 06/02/97	.XXXX	±.0005

TITLE DELTA - WYE CONNECTION DIAGRAM

MAT'L.

FINISH

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

RFP

DIST

CAD FILE 00417201

SIZE

A

DRAWING NO.

004172-01

REV.

03