PRODUCT INFORMATION PACKET

Model No: 131779.00 Catalog No: 131779.00

OBSOLETE - REPLACED BY G131779.00,

5HP..3500RPM.182.DP.208-230/460V.3PH.60HZ.CONT.NOT.40C.1.15SF.C FACE..C182T34DC6A




Nameplate Specifications

Output HP	5 Hp	Output KW	3.7 kW	
Frequency	60 Hz	Voltage	208-230/460 V	
Current	14.2-13.2/6.6 A	Speed	3500 rpm	
Service Factor	1.15	Phase	3	
Efficiency	82.5 %	Power Factor	87	
Duty	Continuous	Insulation Class	F	
Design Code	В	KVA Code	J	
Frame	182TC	Enclosure	Drip Proof	
Thermal Protection	No Protection	Ambient Temperature	40 °C	
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205	
UL	Recognized	CSA	Υ	
CE	Υ	IP Code	22	
Number of Speeds	1			

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	.88 Ohms	Mounting	Round
Motor Orientation	Nan	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Assembly/Box Mounting	NAN
Connection Drawing	005010.01	Outline Drawing	035344-900

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:07/18/2022

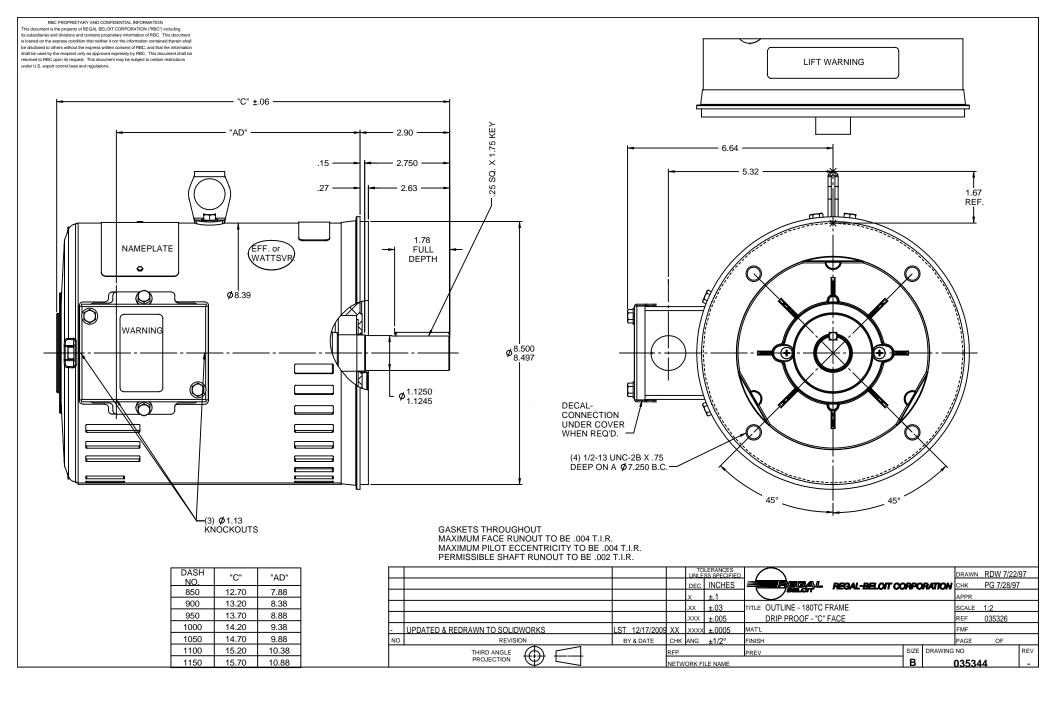

Uncontrolled Copy

