

# PRODUCT INFORMATION PACKET



Model No: G151750.60

Catalog No: G151750.60

Obsolete in the US,

aced by 194120.00 - ..25HP..3525RPM.N256JP.TEFC.230/460V.3PH.60HZ.CONT.40C.1.15SF.RIGID.....PUMP.NOT...

Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





### Nameplate Specifications


Phase	3	Output HP	25 & 20 Hp
Output KW	18.7 & 14.9 kW	Voltage	208-230/460 & 190/380 V
Speed	3530 & 2930 rpm	Service Factor	1.15 & 1.15
Frame	256JP	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	91 & 90.2 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	63-56.5/28.2 & 55/27.5 A	Power Factor	91
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	G
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6308
UL	Recognized	CSA	Y
CE	Y	IP Code	43
Number of Speeds	1		

### Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	2	Rotation	Reversible
Resistance Main	.084 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	JP	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	CONSTANT 2:1		
Outline Drawing	SS622324	Connection Drawing	004172.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

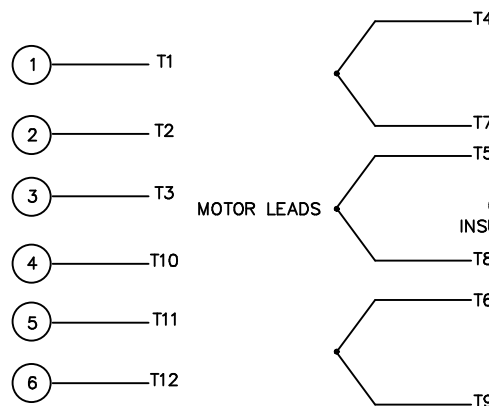
TYPE	C	B	2F	2F1	K
N254JP	28.03	10.24	8.25	—	4
N256JP	29.76	11.97	10.00	8.25	6

				TOLERANCES UNLESS SPECIFIED	 <b>REGAL-BELOIT CORPORATION</b>	DRAWN MOL 09-13-2011
			DEC.	METRIC		CHK MOL 09-13-2011
			.X	±2.5		APPD
			.XX	±.76		SCALE 1=30
			.XXX	±.127		REF
			.XXXX	±.0127		FMF HEBEI
NO.	REVISION	BY & DATE	CHK	ANG ±7°30"	FINISH	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS AN ELECTRONICALLY GENERATED DOCUMENT - NO PAPER COPY TO BE MADE					RFP CAD FILE SS622324	SIZE B DRAWING NO. SS622324 PAGE OF REV.
					DIST	

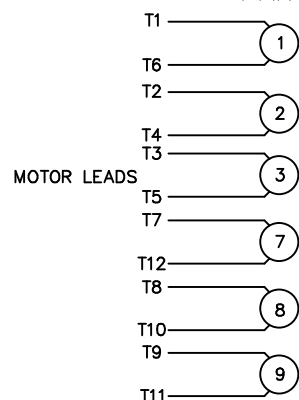
## WYE - DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

## LOW VOLTAGE CONNECTION

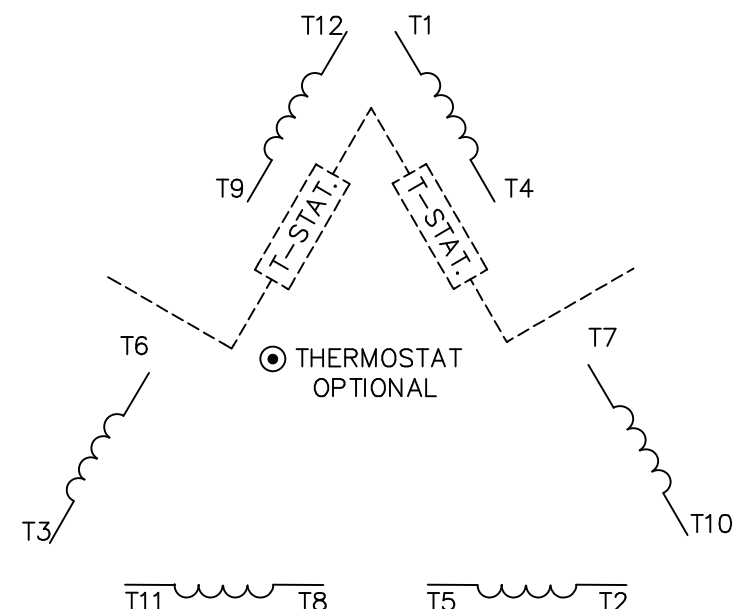
## HIGH VOLTAGE CONNECTION

WYE-DELTA  
STARTER  
TERMINALSWYE-DELTA  
STARTER  
TERMINALS

MOTOR LEADS

MOTOR LEADS  
CONNECT AND  
INSULATE SEPARATELYREFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR  
PROPER CONNECTION OF POWER LINES TO STARTER.PART WINDING START USABLE ON 4 & 6 POLE MOTORS  
LOW VOLTAGE CONNECTION ONLYPART WINDING  
STARTER  
TERMINALSREFER TO THE PART WINDING  
STARTER INSTRUCTIONS FOR PROPER  
CONNECTION OF POWER LINES TO STARTER.REFER TO THE CUTLER - HAMMER OR EQUIV. FOR  
PROPER SELECTION OF OVERLOAD HEATER COILS.

## LINE LEADS

ROTATION CAN BE REVERSED BY  
INTERCHANGING ANY TWO LINE LEADS  
● RED LEADS OR P1, P2, FOR N/C THERMOSTAT

## ACROSS THE LINE START &amp; RUN

	LINE 1	LINE 2	LINE 3	JOIN & INSULATE SEPARATELY
HIGH VOLT	T1,T12	T2,T10	T3,T11	(T4,T7) (T5,T8) (T6,T9)
LOW VOLT	T1,T6 T7,T12	T2,T4 T8,T10	T3,T5 T9,T11	

TOLERANCES  
UNLESS SPECIFIED

DEC. INCHES

.X ±.1

.XX ±.01

.XXX ±.005

.XXXX ±.0005

ANG ±1/2"

ELECTRIC MOTORS  
GEARMOTORS  
AND DRIVES

DRAWN WLW 09/08/77

CHK RPB 09/12/77

APPD JCW 09/12/77

SCALE 1=1

REF

FMF

PREV

03 REV'D LOW VOLTAGE CONN. LEADS PER ELEC.

BJB 06/07/00

02 ADDED T-STAT. NOTES PER ELECTRICAL

KMM 06/02/98

01 REDRAWN TO CAD

DBT 06/02/97

NO. REVISION

BY &amp; DATE

CHK

ANG

RFP

DIST

TITLE DELTA - WYE CONNECTION DIAGRAM

MAT'L.

FINISH

CAD FILE 00417201

SIZE

A

DRAWING NO.

004172-01

REV.

03

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT  
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED  
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT