PRODUCT INFORMATION PACKET




Model No: 132483.00 Catalog No: 132483.00

132483.00..5HP..1760/1450RPM.184TC.TEFC.230/460//190-200/380-415.3PH.60/50HZ.CONT.40C.1.15SF.RIGID.

.....









Nameplate Specifications


Phase	3	Output HP	5 & 5 Hp
Output KW	3.7 & 3.7 kW	Voltage	230/460 & 190-200/380-415 V
Speed	1760 & 1450 rpm	Service Factor	1.15 & 1.15
Frame	184TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	89.5 & 87.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	12.6/6.3 & 15.2-14.8/7.6-7.2 A	Power Factor	83.0
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6207	Opp Drive End Bearing Size	6207
UL	Recognized	CSA	Υ
CE	Υ	IP Code	55
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	2.68 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Assembly/Box Mounting	F1 ONLY
Outline Drawing	608-0009-1000	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

Uncontrolled Copy

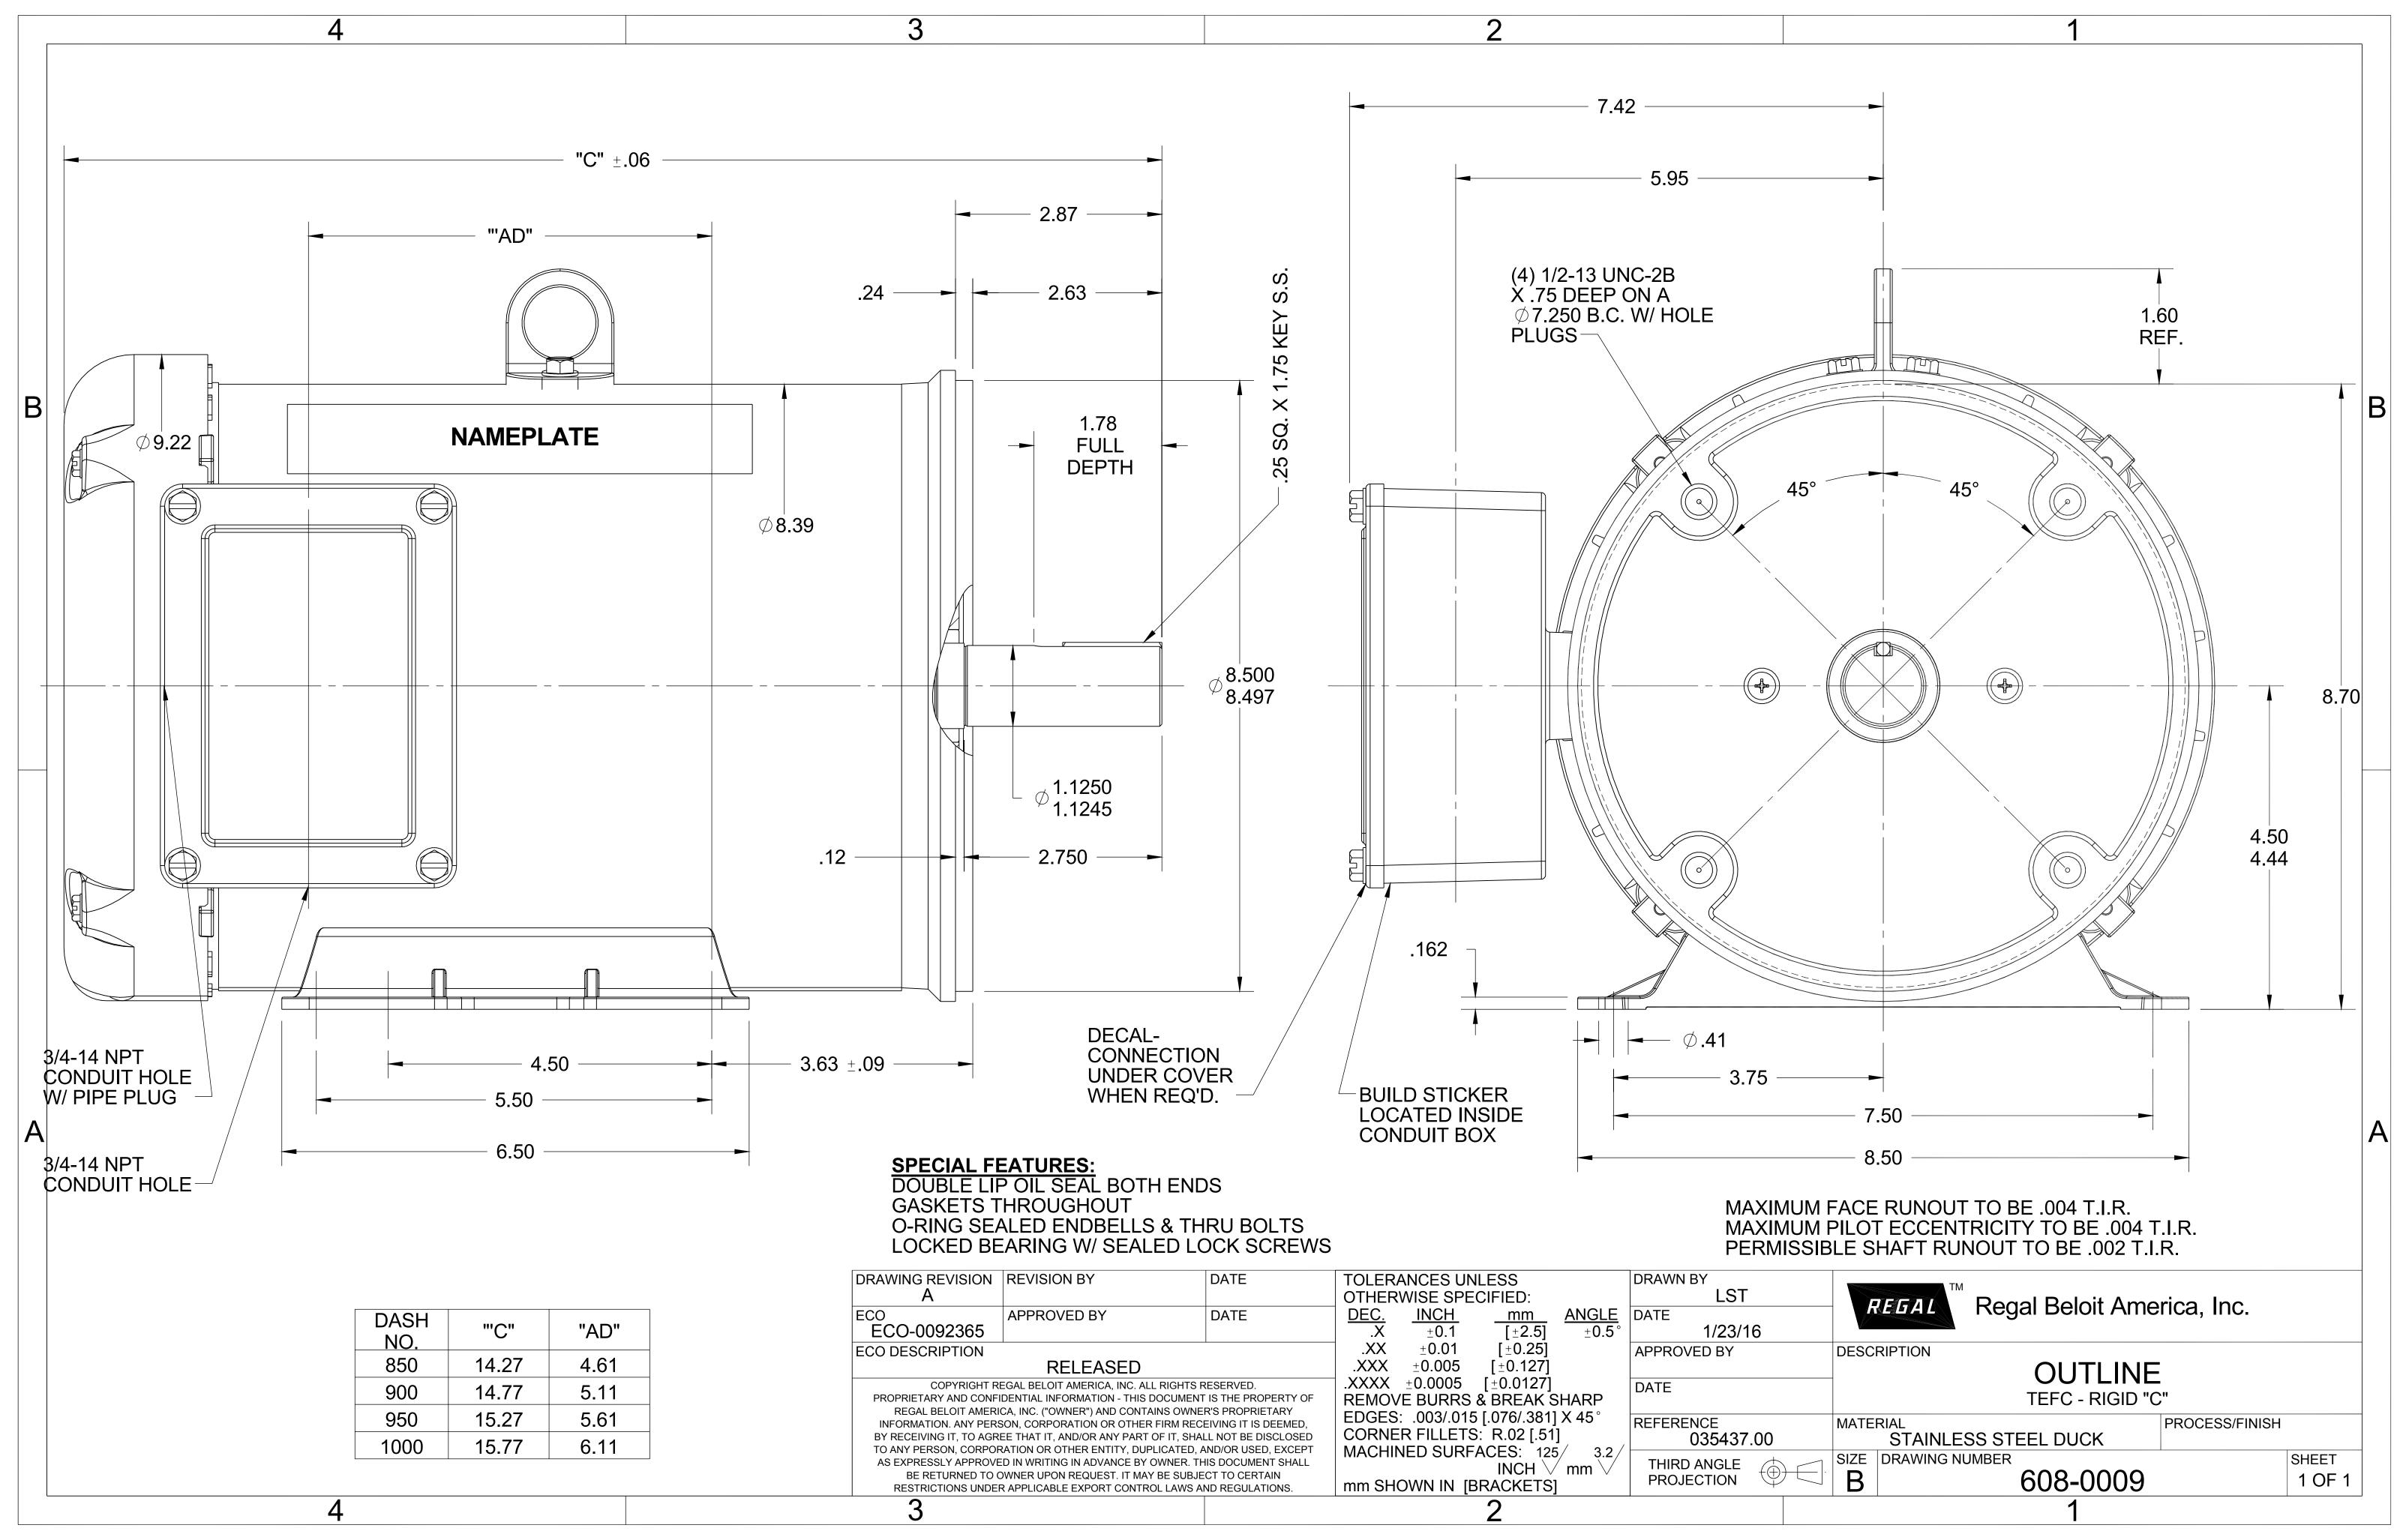

Uncontrolled Copy

