PRODUCT INFORMATION PACKET




Model No: 140831.00 Catalog No: 140831.00

General Purpose Motor, 7.50 & 7.50 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM,

213T Frame, DP







Product Information Packet: Model No: 140831.00, Catalog No:140831.00 General Purpose Motor, 7.50 & 7.50 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM, 213T Frame, DP




Nameplate Specifications


Phase	3	Output HP	7.50 & 7.50 Hp
Output KW	5.6 & 5.6 kW	Voltage	230/460 & 190/380 V
Speed	1765 & 1460 rpm	Service Factor	1.25 & 1.25
Frame	213T	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	91 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	21.8-20.8/10.4 & 24/12 A	Power Factor	74
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6207	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications


Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	1.13 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Overall Length	16.25 in
Frame Length	11.00 in	Shaft Diameter	1.375 in
Shaft Extension	3.38 in	Assembly/Box Mounting	F2/F1 CAPABLE
Connection Drawing	005010.20	Outline Drawing	037610-1100

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

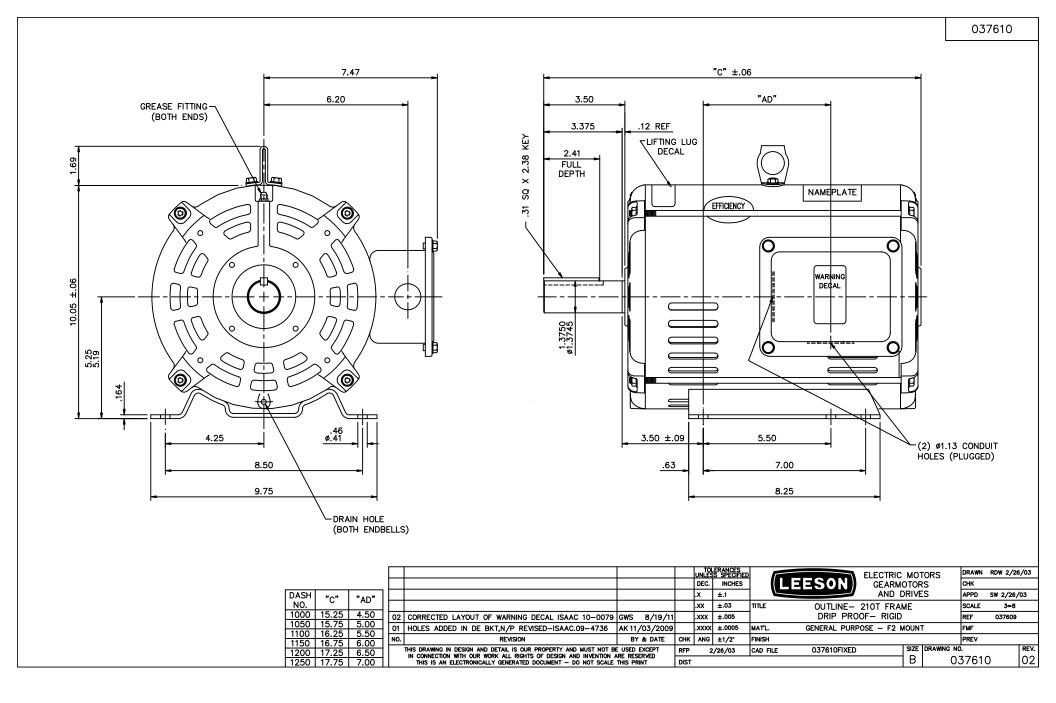

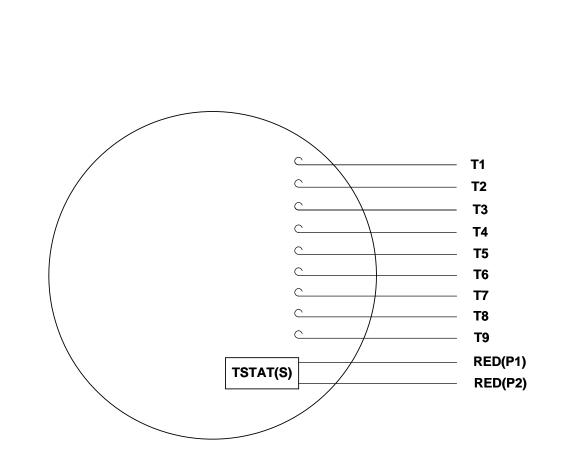

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END. Uncontrolled Copy

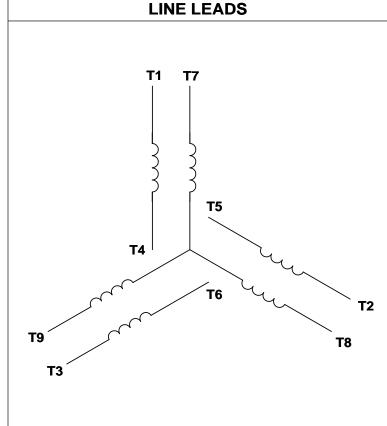

VOLTAGE	L1	L2	L3	JOIN & INSULATE
HIGH	T1	T2	Т3	(T4,T7) (T5,T8) (T6,T9)
LOW	T1,T7	T2,T8	T3,T9	T4,T5,T6

DRAWING REVISION	REVISION BY	DATE
G	MVG	04/05/2017
ECO	APPROVED BY	DATE
ECO-0121253	SM	04/05/2017
ECO DESCRIPTION		

ADDED P1 & P2 FOR TSTAT

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF
REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY
INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED,
BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED
TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT
AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL
BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN
RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLERAN	ICES UN	NLESS	
OTHERW	ISE SPE	CIFIED:	
DEC.	INCH	mm	ANGLE
	±0.1	[±2.5]	±0.5°
.XX	±0.01	$[\pm 0.25]$	
.XXX	± 0.005	[±0.127]	
.XXXX ±	0.0005	[±0.0127]	
REMOVE	BURRS	& BREAK S	HARP
EDGES:	.003/.01	5 [.076/.381]	X 45°
CORNER	FILLETS	S: R.02 [.51]
MACHINE	D SURF	ACES: 125	3.2/
		INCH ∨	$mm \bigvee$
mm SHO\	NN IN [I	BRACKETS]	

<u> </u>	DRAWN BY DBT 12/16/97 DATE	- \	REGAL	R	egal Beloit A	me	rica, Inc.	
	APPROVED BY KH 12/17/97 DATE	DES	COI		DIAGRAM			_
				31	PHASE WITH P	ROTE	CTOR	
	REFERENCE	MAT	ERIAL				PROCESS/FINISH	
,		D	ECAL - 004	4014	(TSTAT) - 0805	82	STOCK	
/	THIRD ANGLE	SIZI	DRAWING	NUMBI	ER			SHEET
	PROJECTION	⊐∣A	<u> </u>		0050102	20		1 OF 1



1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CATALOG #: 140831.00

CONN. DIAGRAM: 005010.20

OUTLINE: 037610-1100 **MOUNTING:** F2/F1 CAPABLE

WINDING #: T9494 3 A

TYPICAL MOTOR PERFORMANCE DATA

НР	kW	SYNC, RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN	
7 1/2&7 1/2	5.60&5.60	1800	1765&1460	213T	DP	Н	В	

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	амв°с
3	60/50	230/460&190/380	21.8-20.8/10.4&24/12	ACROSS THE LINE	CONTINUOUS	F4	1.25/1.25	40

FULL LOAD EFF:	91	3/4 LOAD EFF:	90.6	1/2 LOAD EFF:	89.4	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	74	3/4 LOAD PF:	71.5	1/2 LOAD PF:	61.8	0	SQ CAGE IND RUN

F.L. TORQUE LOCKED ROTOR AMPS		L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
22.5 LB-FT	126 / 63	40 LB-FT 178 %	72 LB-FT 320 %	25

SOUND PRESSURE @ 3 FT.	SOUND	POWER	ROTO	R WK^2	MAX	(. WK^2	SAFE S	SAFE STALL TIME		APPROX. MOTOR WGT
62 dBA	72	dBA	0.801	LB-FT^2	0.8	LB-FT^2	0	SEC.	0	- LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	GREEN - LEESON WATTSAVER

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	ODE	GREASE	SHAFI ITPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	AISI 1045 (C-240)	ROLLED STEEL
6207	6206	POLYKEX EM		NONE			

	THERMO-PROTE	CTORS	THERMICTORS	CONTROL	CDACE HEATERS		
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS	

INVERTER TORQUE: NONE INV. HP SPEED RANGE: NONE
ENCODER: NONE
NONE NONE PPR
BRAKE: NONE NONE
NONE P/N NONE NONE NONE
NONE FT-LB NONE V NONE Hz

5 of 6 8/6/2018

