### PRODUCT INFORMATION PACKET



Model No: 141116.00

Catalog No: 141116.00

e US, replaced by 141291.00 - 7 1/2HP..1765RPM.213T.TEFC.575V.3PH.60HZ.CONT.40C.1.25SF.RIGID.C213T17FB

Miscellaneous





#### Nameplate Specifications


Output HP	7.50 Hp	Output KW	5.6 kW
Frequency	60 Hz	Voltage	575 V
Current	8.5 A	Speed	1770 rpm
Service Factor	1.15	Phase	3
Efficiency	91.5 %	Power Factor	72
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	j
Frame	213T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	Thermostats (N/C)	Ambient Temperature	40 °C
Drive End Bearing Size	6207	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	54
Number of Speeds	1		

#### **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	0 Ohms	Mounting	Rigid Base
Drive End Bearing	Ball	Opp Drive End Bearing	Ball
Frame Material	Rolled Steel	Shaft Type	Т
Assembly/Box Mounting	VERIFY		
Outline Drawing	037626-1200	Connection Drawing	005102.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/26/2021

# Uncontrolled Copy

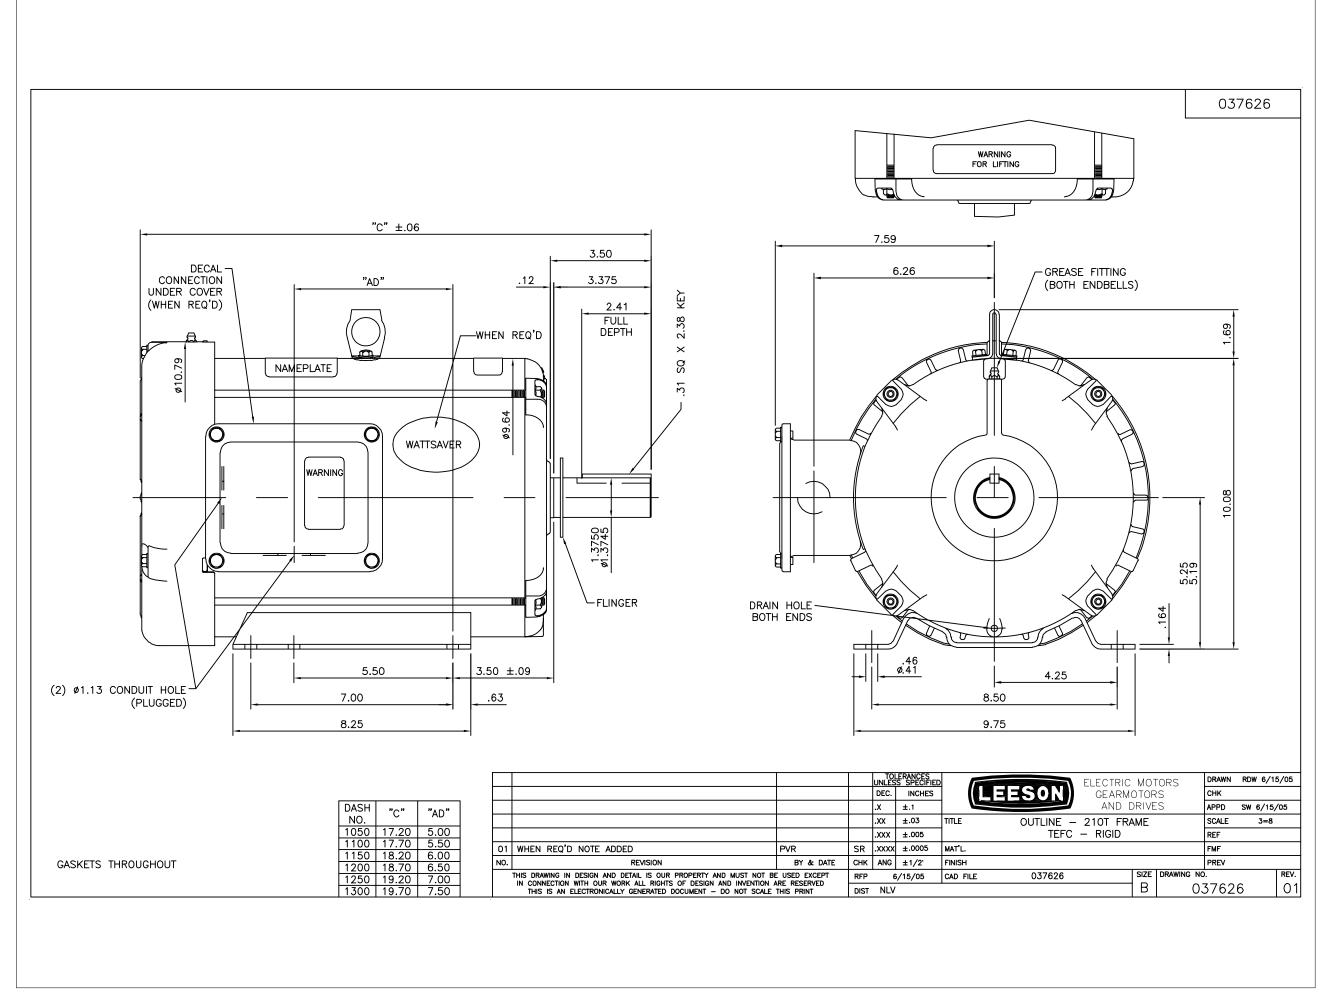

## Uncontrolled Copy

