PRODUCT INFORMATION PACKET



Model No: 143TTFBD6041 Catalog No: GT3001A

Globetrotter® Close-Coupled Pump Motor, 1 HP, 3 Ph, 60 Hz, 200 V, 1800 RPM, 143JM Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Output HP	1 Hp	Output KW	0.75 kW
Frequency	60 Hz	Voltage	200 V
Current	3.5 A	Speed	1755 rpm
Service Factor	1.15	Phase	3
Efficiency	85.5 %	Power Factor	74
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	N
Frame	143JM	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205
UL	Listed	CSA	Υ
CE	Υ	IP Code	43
Hazardous Location	DIVISION 2 T2B	Number of Speeds	1

Technical Specifications


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter		
Poles	4	Rotation	Reversible		
Resistance Main	14.25 Ohms	Mounting	Bolt-on Base		
Motor Orientation	Horizontal	Drive End Bearing	Ball		
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel		
Shaft Type	JM	Shaft Diameter	0.875 in		
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 10:1/VARIABLE 10:1		
Outline Drawing	SS621064-800	Connection Drawing	EE7300		


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:11/30/2022

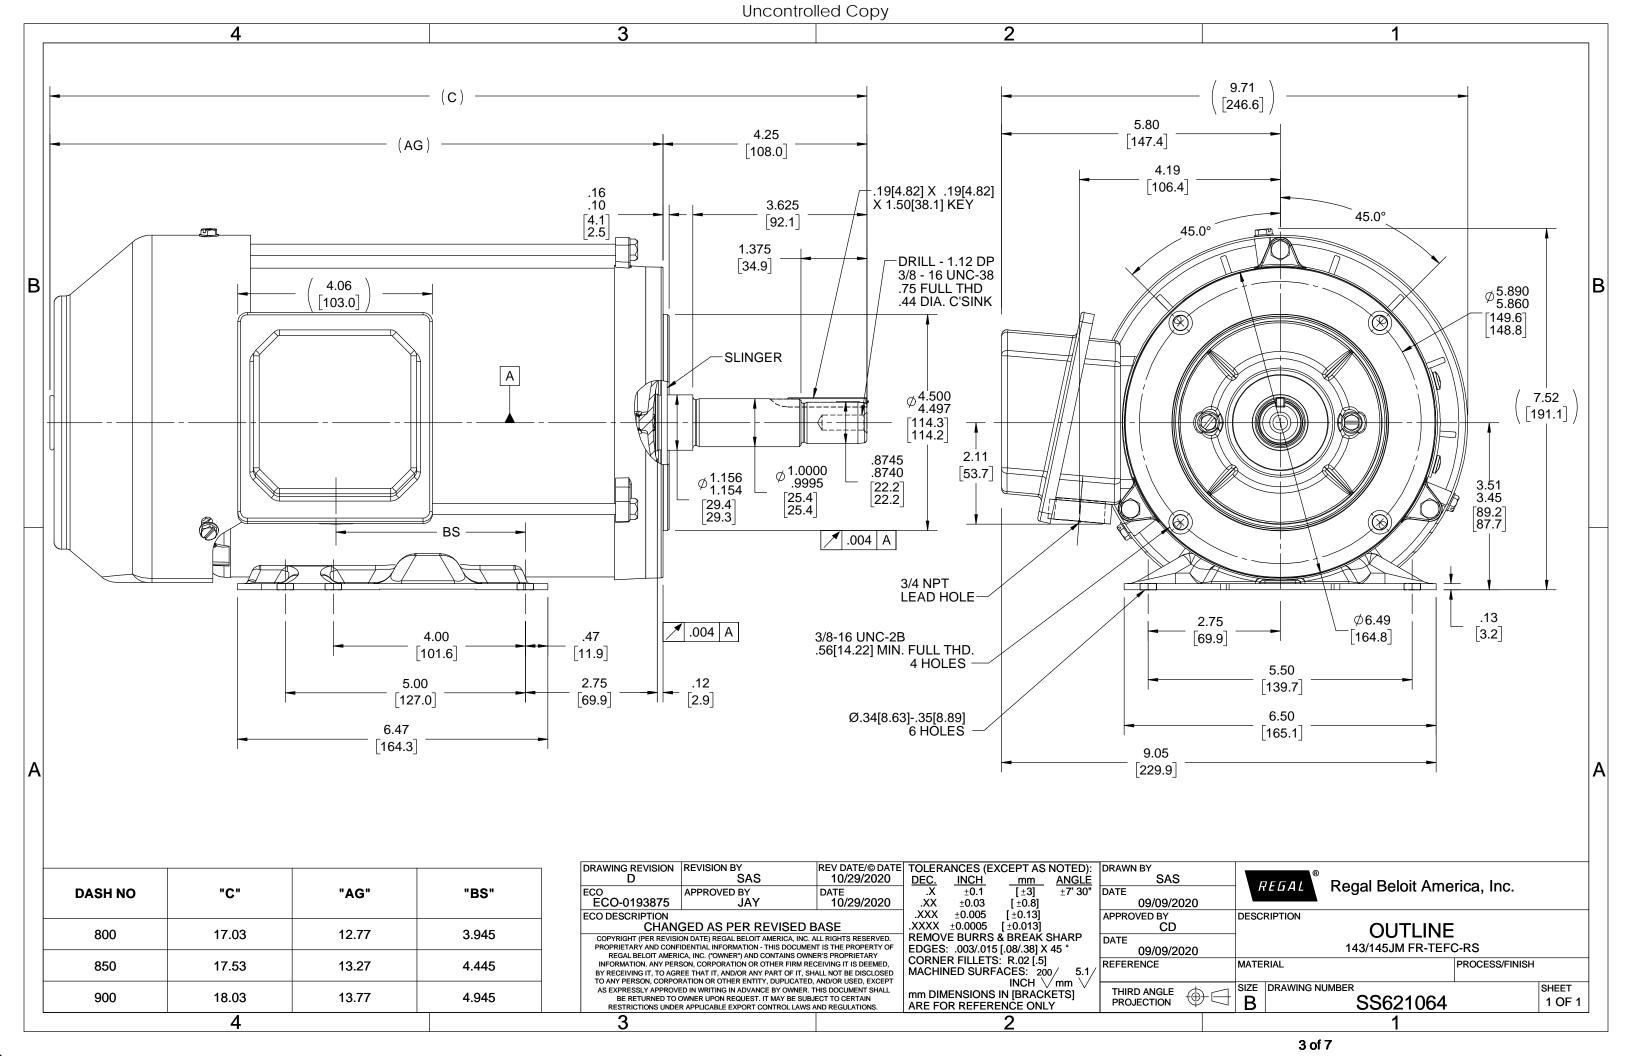



ALC:					P.O. BOX 8003								
marathon [®]					WAUSAU, WI 54401-8003 PH. 715-675-3311								
					11 6				FH. 713-0	70-3311			
						Motors		DAT	A VOLTS:	200			
					CE	RTIFICATION DATA S	HEET						
CUSTON	CUSTOMER:						CUSTO	MER P.O. #:					
ORDER #						R	REFERENCE MODEL #: 143TTFBD6041		06041				
CONN. D		EE7300					CAT #: CUSTOMER PART #:						
OUTLINE		SS621064-800 HAT4005	FR	4					F1/F2 CAPABLE				
SPEED:	•	13/1/1000		•					2 0	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			
		-		T	YPICAL	MOTOR PERFORMA	NCE D	ATA					
НР	кw	SYNC RPM	FI	RPM		FRAME	FNC	LOSURE	TYPE	KVA CODE		DESIGN	
1	0.75	1800	1	755		143JM	TEFC		TFR	R J		В	
PH	HZ	VOLTS		MPS		START TYPE		DUTY	INSL	S.F.	AMB	ELEV.	
3	60	200		.45		LINE OR INVERTER		CONT	F	1.15	40	3300	
Ľ	'		<u> </u>				`			•			
	F.L. EFF		3/4 LD EFF	84.0		1/2 LD EFF	78.5	GTD EFF		ELECT			
	F.L. PF	74.0	3/4 LD PF	65.0		1/2 LD PF	52.0	81.5		SQ CAGE II	NV RATED		
F	L. TORQUE	LR AMPS @	460 V		I R	TORQUE		B.D. TORQUI	=	F.L. RISE (° C	١		
3.0	LB-FT	34.5	100 1	11.0 I	LB-FT	367%	13.0	LB-FT	433%	65	Ί		
										•			
SOUND	PRESSURE @ 3 FT.	SOUND POWER	ROTO	OR WK²		MAX. LOAD WK ²	SAFE S	TALL TIME		STARTS/HOUR	APROX.	MOTOR WGT	
62	dBA	71 dBA		LB-FT ²	7	LB-FT ²	15	SEC.		3		LB.	
			`										
			MOUNT		*** SL	IPPLEMENTAL INFORMA		ARDOUS	DRIP		1		
DE BI	RACKET TYPE	ODE BRACKET TYPE	TYPE	MOTOR ORIEN	NOITATION	SEVERE DUTY		CATION	COVER	SCREENS		PAINT	
	C-FACE	STANDARD	BOLT-ON	HORIZON			١	IONE	YES NONE		BLUE (ENAMEL)		
DE	BEARINGS	GREASE	SHAF	T TYPE		SPECIAL DE	SPE	CIAL ODE	SHAFT MATERIAL		FRAME MATERIAL		
BALL	BALL	POLYREX EM		JM		NONE	١.	IONE	40.45 LIOT POLLED (C. 20.4)		ROLLED STEEL		
6206	6205	POLTREXEM		JIVI		NONE	NONE 1045 HOT ROLLED (C-204) ROLLED S				OLLED STEEL		
				1			1		1		1		
l _{THI}	ERMOSTATS	PROTECTORS	WDG	RTD's		BRG RTD's	THER	MISTORS		CONTROL	SPAC	E HEATERS	
	NONE	NOT		ONE		NONE		IONE		FALSE		NA	
	1 (ohms/ph) 1.29905482	R2 (ohms/ph) 0.202646503		hms/ph) 378072	X2 (ohms/ph) 0.349716446			ohms/ph) 7826087	VIBRATION (in/sec) 0.150		FLOAT ODE		
	1.2300402	0.202040003	0.400	010012		0.3497 10440	9.6	020001		J. 15U	1	ODE	
*													
N				·				INVERTER TORQUE: CONSTANT 10:1/VARIABLE 10:1					
0 T							INV. HP SPEED RANGE: NONE						
Ė							ENCODER: NONE						
s							NONE						
•						NONE NONE PPR					PPR		
					BRAKE: NONE								
	PREPARED BY: DATE:	2/22/2022						NOI FT-LB:	NE	NONE NA			
	WAIL				VOLTAGE: NONE HZ:								
I	FORM: 3531 REV_4 2/27/06					UL: V - LI,ME-INS,CONST UL REC							

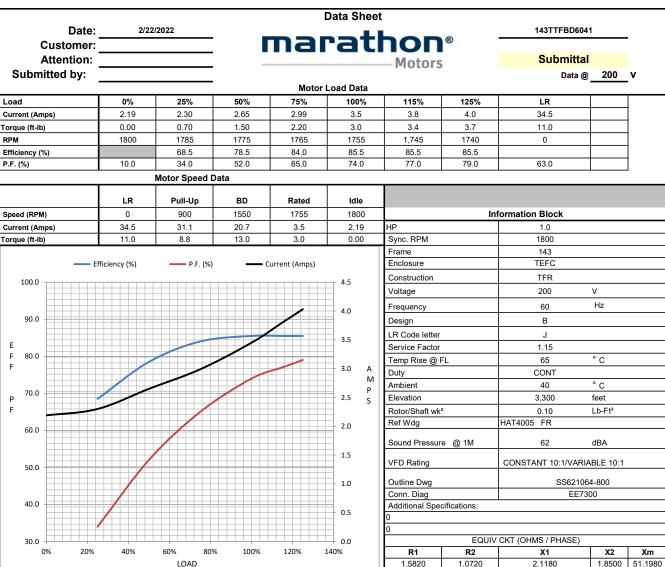

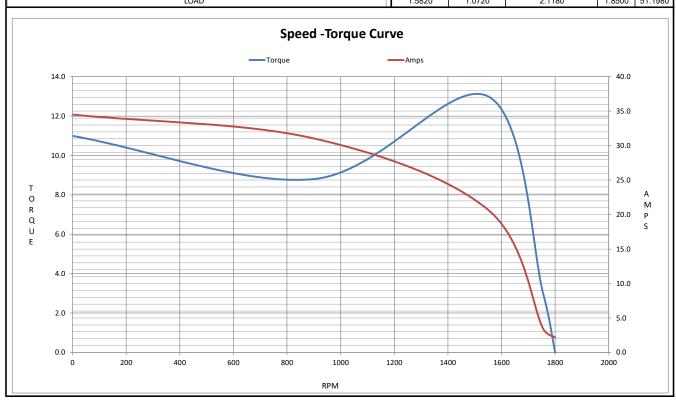



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 143TTFBD6041

(Model No. may contain prefix and/or suffix characters)

Catalog No : GT3001A

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

J. Cluse

Authorized Representative in the Community:

Michael A. Logsdon

Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

(€ 22