PRODUCT INFORMATION PACKET





Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Product Information Packet: Model No: 170371.00, Catalog No:170371.00 General Purpose Motor, 150 & 125 HP, 3 Ph, 60 & 50 Hz, 460 & 380 V, 1800 & 1500 RPM, 445T Frame, TEFC

Nameplate Specifications


Phase	3	Output HP	150 & 125 Hp				
Output KW	112.0 & 93.0 kW	Voltage	460 & 380 V				
Speed	1790 & rpm	Service Factor	1.15 & 1.15				
Frame	445T	Enclosure	Totally Enclosed Fan Cooled				
Thermal Protection	No Protection	Efficiency	95.8 %				
Ambient Temperature	40 °C	Frequency	60 & 50 Hz				
Current	164 & 165 A	Power Factor	89.5				
Duty	Continuous	Insulation Class	F				
Design Code	В	KVA Code	н				
Drive End Bearing Size	6318	Opp Drive End Bearing Size	6317				
UL	Recognized	CSA	Y				
CE	Y	IP Code	43				
Number of Speeds	1						

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run			
Poles	4	Rotation	Reversible			
Mounting	Rigid Base	Motor Orientation	Horizontal			
Drive End Bearing	Ball	Opp Drive End Bearing	Ball			
Frame Material	Cast Iron	Shaft Type	т			
Overall Length	44.88 in	Shaft Diameter	3.375 in			
Shaft Extension	8.5 in	Assembly/Box Mounting	F1/F2 CAPABLE			
Connection Drawing	005190.01	Outline Drawing	16954760			

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

LEESON

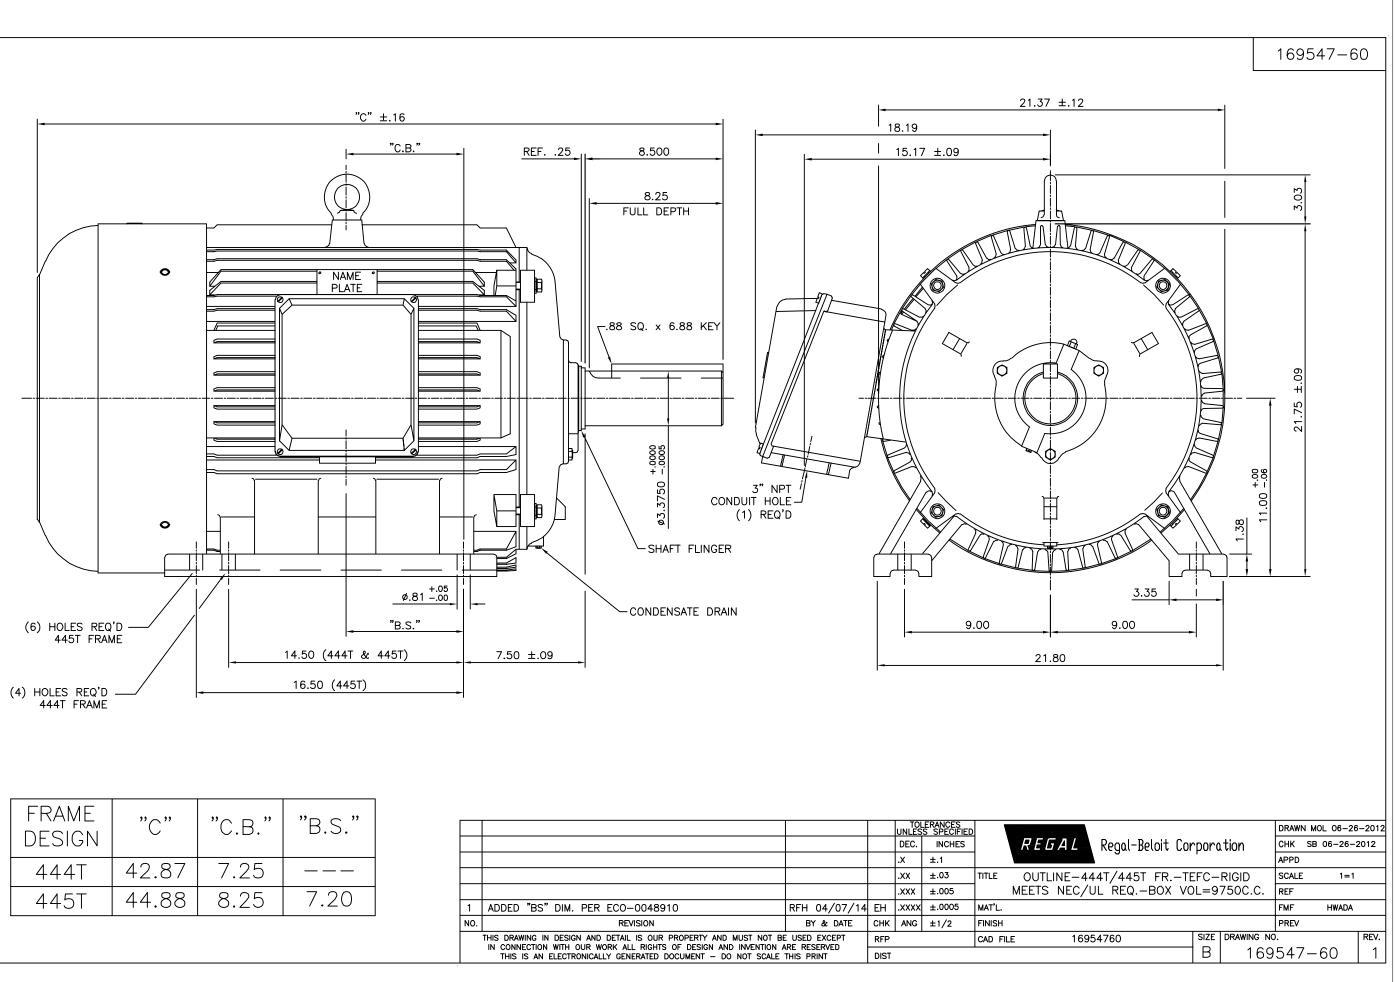

FRAME DESIGN	"C"	"C.B."	"B.S."
444T	42.87	7.25	
445T	44.88	8.25	7.20
L			

-							
				TOL UNLES	ERANCES		
				DEC.	INCHES		REGAL Re
				.x	±.1		
				.xx	±.03	TITLE	OUTLINE-444T/
				.xxx	±.005		MEETS NEC/UL F
1	ADDED "BS" DIM. PER ECO-0048910	RFH 04/07/14	EH	.xxxx	±.0005	MAT'L.	
Ν	D. REVISION	BY & DATE	СНК	ANG	±1/2	FINISH	
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BU		RFP				e 1695476
	THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE		DIST				

					T_1				T6 W2 T		90-01
					Т4 Т5	V1 W1 U2 V2 W2	T3 W1 T	5 V2		L3	T4 U2 T2 V1
							START (WYE)	T1 U1	T2 V1	T3 U2	(T4,T5,T6) (U2,V2,W2)
							RUN (DELTA)	(T1,T6 (U1,W2	, , , , , , , , , , , , , , , , , , , ,	(⊤3,⊤5) (₩1,∀2)	
				TOLERANCES OTHERWISE S			ESO		CTRIC C		$A \top \cap N $
04	ADDED MAT'L (CWLE) PER ECO-0168542	DS	6/10/2019	DECIMA	ALS			1			
03	ADDED IEC DESIGNATIONS	MOL	, ,		± .01		PG 05/07/82	TITLE		ING DIAGRA	
02	REMOVED OBSOLETE STATUS	KJH	6/28/99	.000	± .005	CH'K'D.	TEM		STAR STAR		
)1	REDRAWN ON CAD REVISION	DBT BY	05/30/97 Date		± .0005 ± 1/64	APPR. SCALE	05/07/82 1=1	MAT'L.	Y-CONNECTE TA CONNECTED		
	REVISION		DAIL	FRACTIONS	$ \perp / 04$	JUALE	—		IA CONNECTED	1011 - 3111	JLL VULIAUI
10.	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPE	ERTY		ANGLES	± 1/2°	REF.	T2E	FINISH	SIZE	DRAWING NO	

