PRODUCT INFORMATION PACKET



Model No: 171565.60 Catalog No: 171565.60

3 HP General Purpose Motor, 3 phase, 1800 RPM, 208-230/460 V, 182TC Frame, TEFC

General Purpose Motors



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E






Nameplate Specifications


3 Hp	Output KW	2.2 kW
60 Hz	Voltage	208-230/460 V
8.3-8.0/4.0 A	Speed	1770 rpm
1.15	Phase	3
90.2 %	Power Factor	79.2
Continuous	Insulation Class	F
В	KVA Code	J
182TC	Enclosure	Totally Enclosed Fan Cooled
No	Ambient Temperature	40 °C
6206	Opp Drive End Bearing Size	6205
Recognized	CSA	Υ
Υ	IP Code	43
1		
	60 Hz 8.3-8.0/4.0 A 1.15 90.2 % Continuous B 182TC No 6206 Recognized	60 Hz Voltage 8.3-8.0/4.0 A Speed 1.15 Phase 90.2 % Power Factor Continuous Insulation Class B KVA Code 182TC Enclosure No Ambient Temperature 6206 Opp Drive End Bearing Size Recognized CSA

Technical Specifications


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	4	Rotation	Reversible
Mounting	Rigid Base	Motor Orientation	Horizontal
Drive End Bearing	Ball	Opp Drive End Bearing	Ball
Frame Material	Cast Iron	Shaft Type	Т
Overall Length	16.93 in	Shaft Diameter	1.125 in
Shaft Extension	2.75 in	Assembly/Box Mounting	F1/F2 CAPABLE
Connection Drawing	005010.20	Outline Drawing	SS622293-N182TC-4W2

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/12/2021

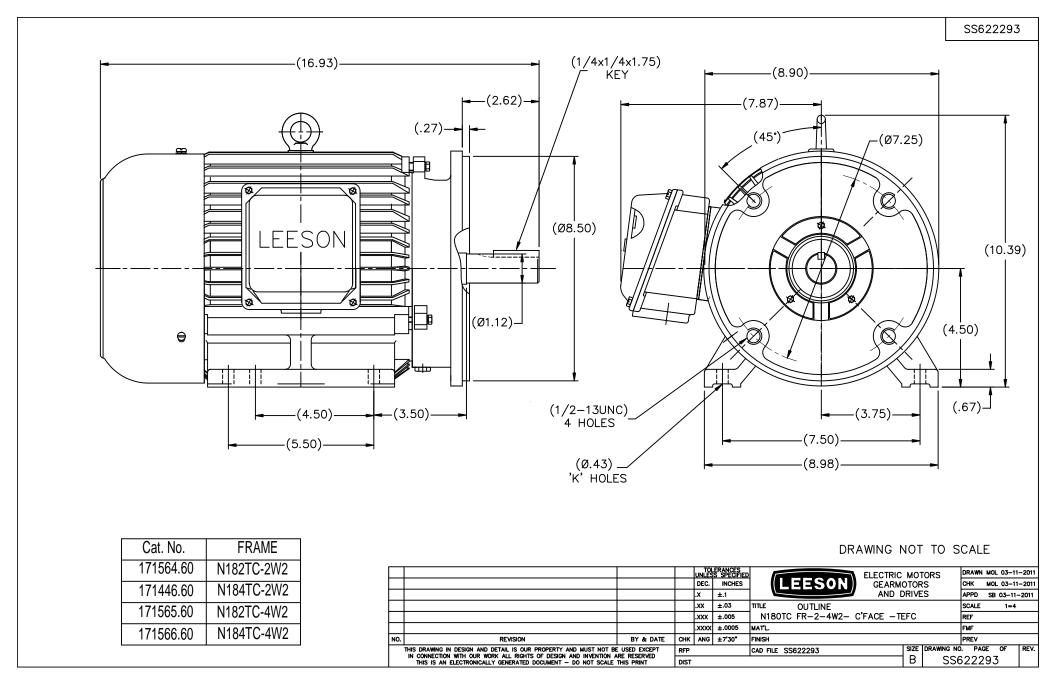

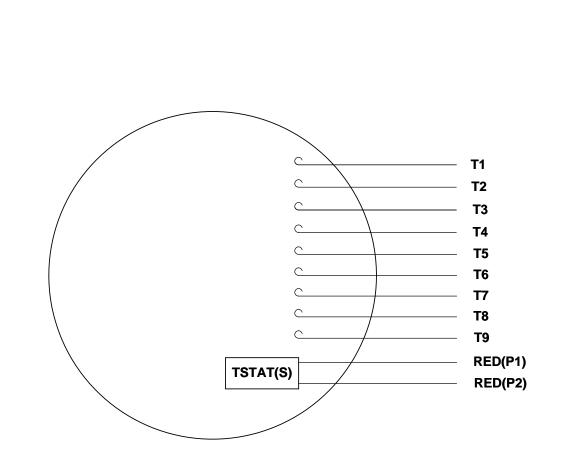

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END. Uncontrolled Copy

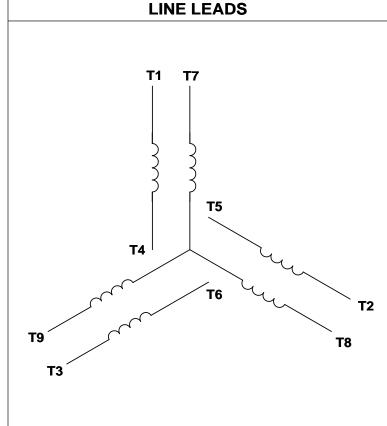

VOLTAGE	L1	L2	L3	JOIN & INSULATE	
HIGH	T1	T2	Т3	(T4,T7) (T5,T8) (T6,T9)	
LOW	T1,T7	T2,T8	T3,T9	T4,T5,T6	

DRAWING REVISION	REVISION BY	DATE
G	MVG	04/05/2017
ECO	APPROVED BY	DATE
ECO-0121253	SM	04/05/2017
ECO DESCRIPTION		

ADDED P1 & P2 FOR TSTAT

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF
REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY
INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED,
BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED
TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT
AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL
BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN
RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLERAN	ICES UN	NLESS	
OTHERW	ISE SPE	CIFIED:	
DEC.	INCH	mm	ANGLE
	±0.1	[±2.5]	±0.5°
.XX	±0.01	$[\pm 0.25]$	
.XXX	± 0.005	[±0.127]	
.XXXX ±	0.0005	[±0.0127]	
REMOVE	BURRS	& BREAK S	HARP
EDGES:	.003/.01	5 [.076/.381]	X 45°
CORNER	FILLETS	S: R.02 [.51]
MACHINE	D SURF	ACES: 125	3.2/
		INCH ∨	$mm \bigvee$
mm SHO\	NN IN [I	BRACKETS]	

<u> </u>	DRAWN BY DBT 12/16/97 DATE	- \	REGAL	R	egal Beloit A	me	rica, Inc.	
	APPROVED BY KH 12/17/97 DATE	DES	COI		DIAGRAM			_
				31	PHASE WITH P	ROTE	CTOR	
	REFERENCE	MAT	ERIAL				PROCESS/FINISH	
,		D	ECAL - 004	4014	(TSTAT) - 0805	82	STOCK	
/	THIRD ANGLE	SIZI	DRAWING	NUMBI	ER			SHEET
	PROJECTION	⊐∣A	<u> </u>		0050102	20		1 OF 1



1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CATALOG #: 171565.60

CONN. DIAGRAM: 005010.20

OUTLINE: B-SS622293 **MOUNTING:** F1/F2 CAPABLE

WINDING #: T08704010 3

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
3	2.24	1800	1770	182TC	TEFC	J	В

PH	Hz	z VOLTS AMPS		START TYPE	DUTY	INSL	S.F.	амв°С
3	60	208-230/460	8.3-8/4	Y START D RUN OR INV	CONTINUOUS	F5	1.15	40

FULL LOAD EFF:	90.2	3/4 LOAD EFF:	89.5	1/2 LOAD EFF:	88.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	79.2	3/4 LOAD PF:	73.5	1/2 LOAD PF:	62	89.5	SQ CAGE INV RATED

F.L. TORQUI	LOCKED ROTOR AMPS	L	.R. TORQ	UE	B.D. TORQUE			F.L. RISE°C
8.9 LB-F	58.8 / 29.4	19.5	LB-FT	218 %	32.7	LB-FT	367 %	25

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
- dBA	- dBA	0.335 LB-FT^2	0.3 LB-FT^2	15 SEC.	2	- LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFI ITPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	POLYREX EM	Т	NONE	NONE	AISI 1045 (C-240)	CAST IRON	
6206	6205	POLTREX EM						

	THERMO-PROTECT	THERMICTORS	CONTROL	CDACE UEATERS			
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE HEATERS	
TSTATS (N/C)	NOT	NONE	NONE	NONE	FALSE	NONE	VOLTS

INVERTER TORQUE: CONSTANT 10:1 INV. HP SPEED RANGE: NONE **ENCODER:** NONE NONE NONE NONE PPR NONE Т **BRAKE:** NONE NONE P/N NONE NONE Ε NONE NONE NONE FT-LB NONE V NO BRAKE Hz S

5 of 6 7/20/2018

