PRODUCT INFORMATION PACKET



Model No: 171687.60 Catalog No: 171687.60

General Purpose Motor, 30 & 25 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V, 3600 & 3000 RPM,

284TSC Frame, DP






Nameplate Specifications

Phase	3	Output HP	30 & 25 Hp
Output KW	22.4 & 18.7 kW	Voltage	208-230/460 & 190/380 V
Speed	3550 & 2955 rpm	Service Factor	1.15 & 1.15
Frame	284TSC	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	92.4 & 91.7 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	75-68.5/34.5 & 68/34 A	Power Factor	89
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6312	Opp Drive End Bearing Size	6211
UL	Recognized	CSA	Υ
CE	Υ	IP Code	12
Number of Speeds	1		


Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	2	Rotation	Reversible
Resistance Main	.256 Ohms	Mounting	Round
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	TS	Overall Length	22.16 in
Shaft Diameter	1.600 in	Shaft Extension	3.23 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 2:1
Connection Drawing	004172.01	Outline Drawing	SS622040LE


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

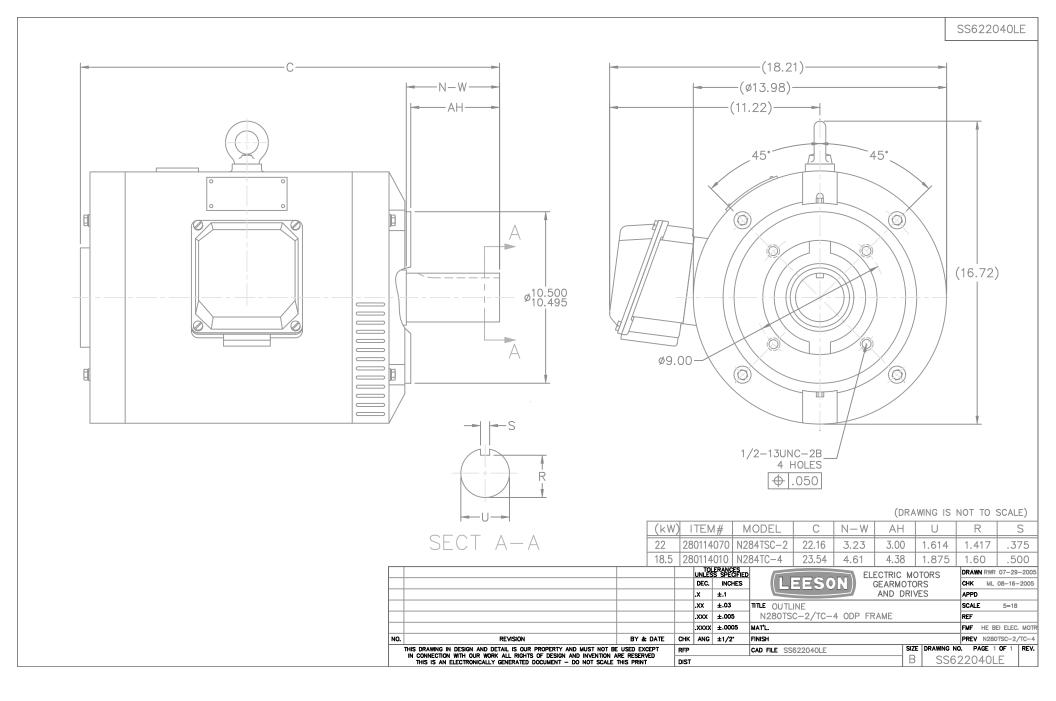

WYE - DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

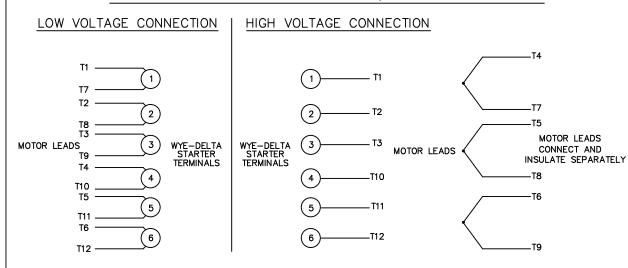

REFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

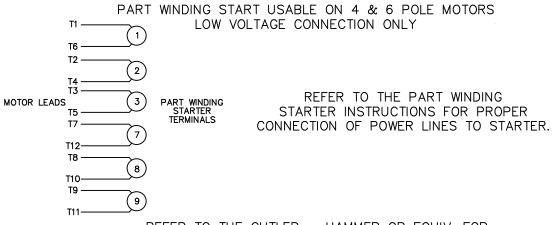

REFER TO THE CUTLER — HAMMER OR EQUIV. FOR PROPER SELECTION OF OVERLOAD HEATER COILS.

				UNLES	ERANCES S SPECIFIED				T ELECTRIC	MOTORS	DRAW	N WLW 09/0	08/77
				DEC.	INCHES		3=5	(\bullet)	GEARM	OTORS	СНК	RPB 09/12	2/77
				.x	±.1				AND C	RIVES	APPD	JCW 09/1:	2/77
03	REV'D LOW VOLTAGE CONN. LEADS PER ELEC.	BJB 06/07/00		.xx	±.01	TITLE	DELTA -	WYE	CONNECTION	DIAGRAM	SCAL	E 1=1	
02	ADDED T-STAT. NOTES PER ELECTRICAL	KMM 06/02/98		.xxx	±.005						REF		
01	REDRAWN TO CAD	DBT 06/02/97		.xxxx	±.0005	MAT'L.					FMF		
NO.	REVISION	BY & DATE	снк	ANG	±1/2*	FINISH					PREV		
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT B		RFP			CAD FILE	00	041720	1	SIZE DRAWING			REV.
	IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION AT THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE		DIST			•				A 00)4172	2-01	03

ROTATION CAN BE REVERSED BY INTERCHANGING ANY TWO LINE LEADS

• RED LEADS OR P1, P2, FOR N/C THERMOSTAT

ACROSS THE LINE START & RUN											
	LINE 1	LINE 2	LINE 3	JOIN & INSULATE SEPARATELY							
HIGH VOLT	T1,T12	T2,T10	T3,T11	(T4,T7) (T5,T8) (T6,T9)							
LOW VOLT	T1,T6 T7,T12	T2,T4 T8,T10	T3,T5 T9,T11								



CERTIFICATION DATA SHEET

1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CONN. DIAGRAM: 004172.01 **CATALOG #:** 171687.60

OUTLINE: SS622040LE **MOUNTING:** F1/F2 CAPABLE

WINDING #: T14502007 3

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
30&25	22.4&18.7	3600	3550&2955	284TSC	DP	G	В

ī	Ή	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	амв°с
	3	60/50	208-230/460&190/380	75-68.5/34.5&68/34	Y START D RUN OR INV	CONTINUOUS	F5	1.15/1.15	40

FULL LOAD EFF:	92.4&91.7	3/4 LOAD EFF:	92.4	1/2 LOAD EFF:	91	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	89&91	3/4 LOAD PF:	87.5	1/2 LOAD PF:	86.8	92.3	SQ CAGE INV RATED

F.L. TORQUE LOCKED ROTOR AMP		L.R. TORQUE			ı	QUE	F.L. RISE°C	
44.5 LB-FT	434 / 217	82	LB-FT	184 %	125	LB-FT	281 %	45

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX, WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
78 dBA	88 d BA	- LB-FT^2	- LB-FT^2	15 SEC.	-	396 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	ROUND	HORIZONTAL	FALSE	NONE	FALSE	NONE	GREEN - LEESON WATTSAVER

BEAR	INGS	GREASE	SHAFT TYPE SPECIAL DE		SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFITTE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	POLYREX EM	TS	NONE	NONE	AICI 104E (C 240)	CAST IRON	
6312	6211	PULTKEX EM	15	NONE	NONE	AISI 1045 (C-240)	CASTIRON	

	THERMO-PROTECT	ORS		THERMISTORS	CONTROL	SPACE HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL		
TSTATS (N/C)	NOT	NONE	NONE	NONE	FALSE	NONE	VOLTS

*			VERTER TORQUE				
N		EI	ICODER: NONE				
0			ONE NON				
т		Ві	RAKE: NONE	NONE			
E			ONE P/N N	ONE			
		1	ONE NONE ONE FT - LB	NONE V	NONE	Hz	
S							