## **PRODUCT INFORMATION PACKET**

Model No: 182TTDW14029 Catalog No: E097 Close-Coupled Pump Motor, 3 & 2 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM, 182JM Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



marathon<sup>®</sup>

Motors

Product Information Packet: Model No: 182TTDW14029, Catalog No:E097 Close-Coupled Pump Motor, 3 & 2 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM, 182JM Frame, DP

## marathon®


## Nameplate Specifications


| Phase                  | 3                   | Output HP                  | 3 & 2 Hp            |
|------------------------|---------------------|----------------------------|---------------------|
| Output KW              | 2.2 & 1.5 kW        | Voltage                    | 230/460 & 190/380 V |
| Speed                  | 1765 & 1480 rpm     | Service Factor             | 1.15 & 1.15         |
| Frame                  | 182JM               | Enclosure                  | Drip Proof          |
| Thermal Protection     | No Protection       | Efficiency                 | 86.5 & 87 %         |
| Ambient Temperature    | 40 °C               | Frequency                  | 60 & 50 Hz          |
| Current                | 8.8/4.4 & 7.8/3.9 A | Power Factor               | 73.8                |
| Duty                   | Continuous          | Insulation Class           | F                   |
| Design Code            | В                   | KVA Code                   | к                   |
| Drive End Bearing Size | 6206                | Opp Drive End Bearing Size | 6205                |
| UL                     | Recognized          | CSA                        | Y                   |
| CE                     | Y                   | IP Code                    | 22                  |
| Number of Speeds       | 1                   |                            |                     |

## **Technical Specifications**

| Electrical Type       | Squirrel Cage Induction Run | Starting Method       | Across The Line |
|-----------------------|-----------------------------|-----------------------|-----------------|
| Poles                 | 4                           | Rotation              | Reversible      |
| Resistance Main       | 4.85 Ohms                   | Mounting              | Rigid Base      |
| Motor Orientation     | Horizontal                  | Drive End Bearing     | Ball            |
| Opp Drive End Bearing | Ball                        | Frame Material        | Rolled Steel    |
| Shaft Type            | JM                          | Overall Length        | 14.82 in        |
| Frame Length          | 9.00 in                     | Shaft Diameter        | 0.875 in        |
| Shaft Extension       | 4.28 in                     | Assembly/Box Mounting | F1/F2 Capable   |
| Outline Drawing       | 035690-900                  | Connection Drawing    | 005010.01ME     |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

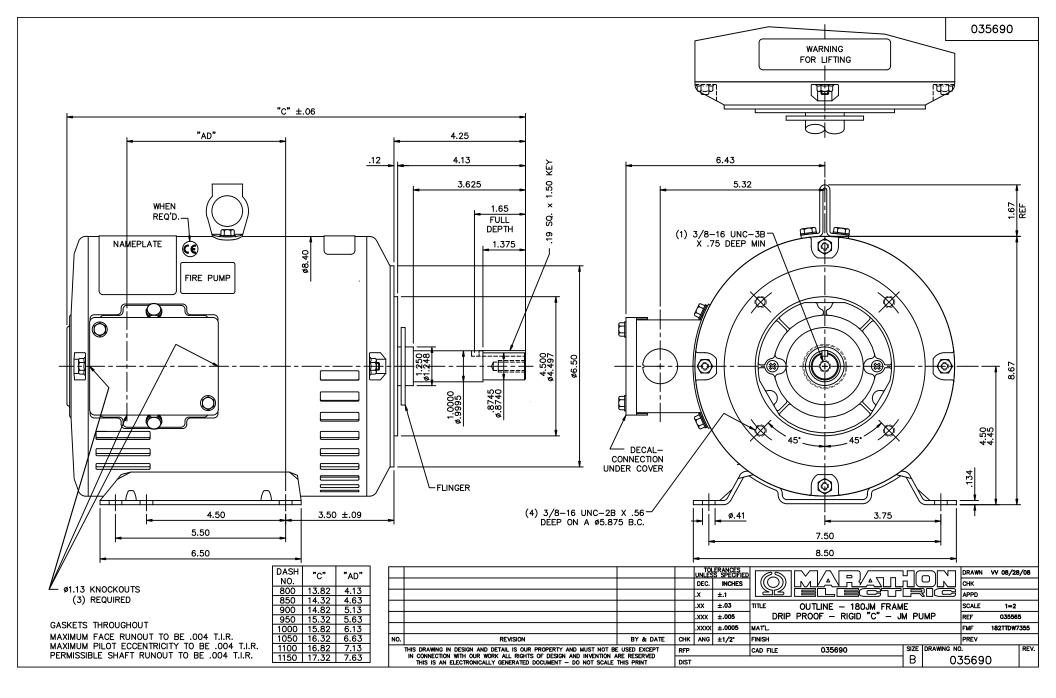

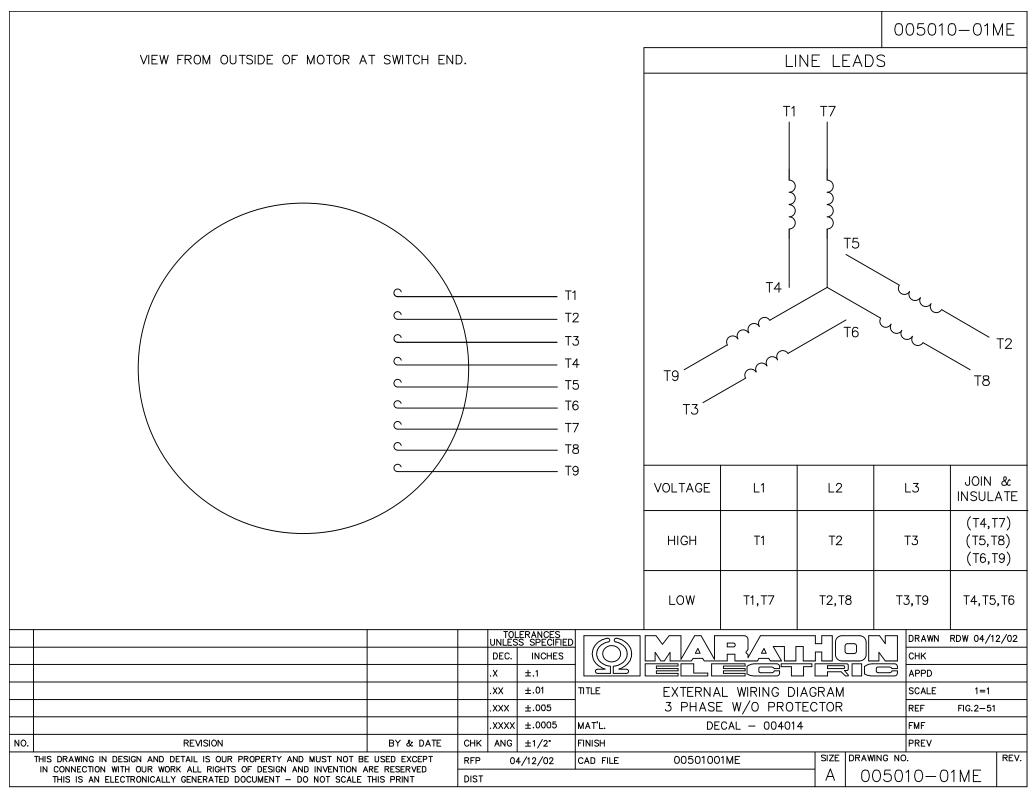

4 of 4

7/20/2012 2:29:41 PM - Converted by Connexus