PRODUCT INFORMATION PACKET




Model No: 182TTFB6085 Catalog No: GT3405

Globetrotter® Close-Coupled Pump Motor, 1.50 & 1 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V,

1200 & 1000 RPM, 182JPV Frame, TEFC









Nameplate Specifications


Phase	3	Output HP	1.50 & 1 Hp
Output KW	1.1 & 0.75 kW	Voltage	230/460 & 190/380 V
Speed	1180 & 983 rpm	Service Factor	1.15 & 1.15
Frame	182JPV	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	87.5 & 86.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	4.6/2.3 & 3.7/1.85 A	Power Factor	71
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	J
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	5.95 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal Or Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JP	Overall Length	19.06 in
Shaft Diameter	0.875 in	Shaft Extension	7.35 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	VARIABLE 10:1
Outline Drawing	SS620562-182TC	Connection Drawing	EE7308

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

SS620562

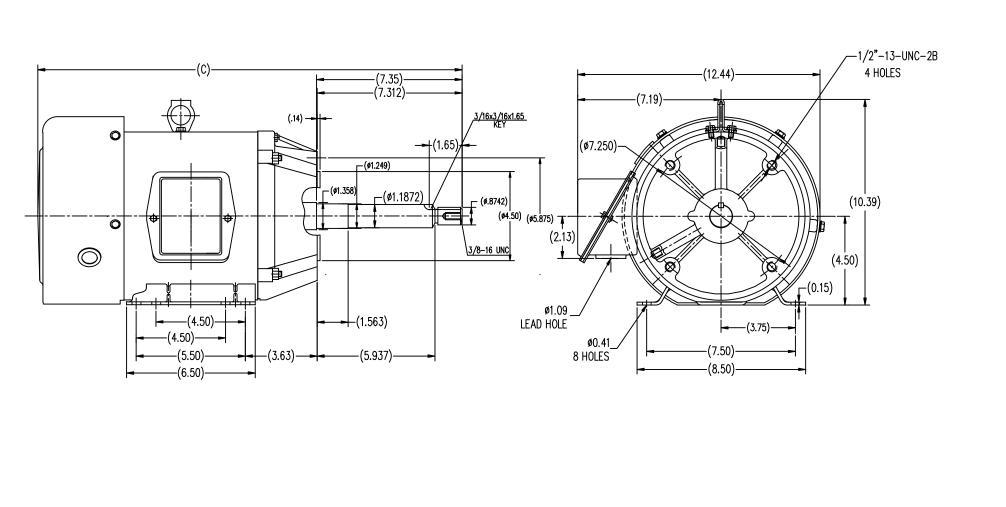

TTFB 182TC	19.067
TTFB 184TC	20.047
FRAME	С

				TOL UNLES	ERANCES S SPECIFIED					DRAWN	ZXC 5-21-	-2012
				DEC.	INCHES		REGAL REGAL-BELOT	REGAL-BELOIT CORPORATION CHK				
				.x	±.1							
				.xx	±.03	TITLE			SCALE	1=4		
				.xxx	±.005	1			REF			
				.xxxx	±.0005	MAT*L.				FMF	HWADA	
NO.	REVISION	BY & DATE	СНК	ANG	±1/2	FINISH				PREV		
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT					CAD FILE	SS620562	SIZE	DRAWING NO			REV.
"	IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT							В	SS6	32056	32	



CERTIFICATION DATA SHEET

182TTFB6085 AA WINDING#: CHT18260007 NONE 1 Model#: CONN. DIAGRAM: EE7308 ASSEMBLY: F1/F2 CAPABLE

OUTLINE: SS620562

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
1 1/2&1	1.12&.75	1200	1180&983	182JPV	TEFC	J	В
	1			1			

	PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
	3	60/50	230/460#190/	4.6/2.3&3.7/1.	LINE OR	CONTINUOU	F7	1.15/1.15	40	3300
Ĺ			380	85	INVERTER	S				

FULL LOAD EFF: 87.5&86.5	3/4 LOAD EFF: 86.5	1/2 LOAD EFF: 84	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 71&69	3/4 LOAD PF: 64	1/2 LOAD PF: 51	86.5	SQ CAGE INV RATED	2.8 / 1.4

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C	
6.7 LB-FT	29 / 14.5	11.4 LB-FT 170	19.5 LB-FT 292	45	

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
55 dBA	65 dBA	0.45 LB-FT^2	32 LB-FT^2	25 SEC.	2	105 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL OR SHAFT	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)
			DOWN					(=: :: :::==)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	JP	NONE	NONE	1045 HOT	ROLLED STEEL
6206	6205					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR


BRAKE: NONE NONE NONE P/N NONE NONE NONE


NONE FT-LB NONE V NONE Hz

Ν 0 Т Ε S

> DATE: 06/27/2017 02:19:05 AM FORM 3531 REV.3 02/07/99

^{**} Subject to change without notice.

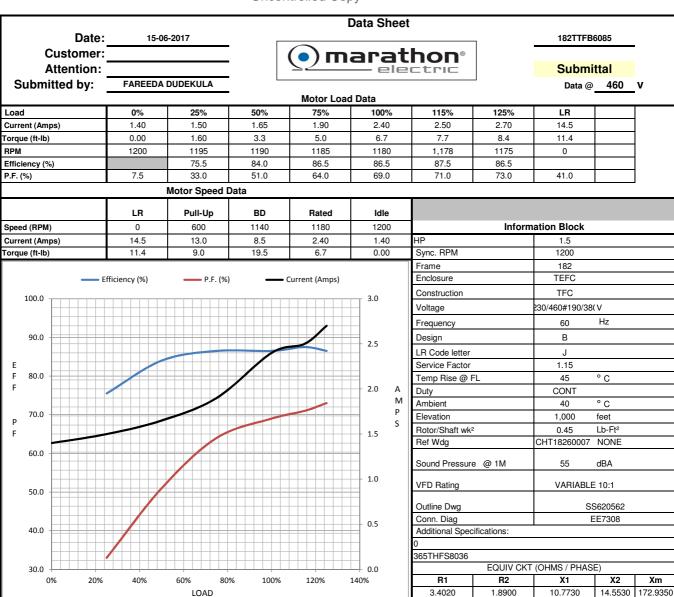

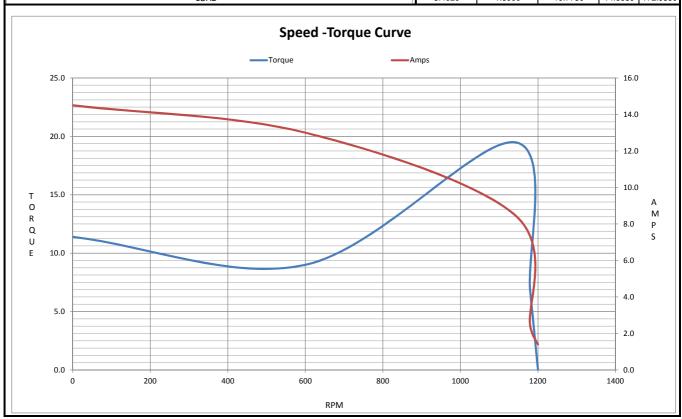



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 182TTFB6085

(Model No. may contain prefix and/or suffix characters)

Catalog No: GT3405

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A. Logsdon

Vice President, Technology

Created on 09/01/2022

Authorized Representative in the Community:

J. cerse

Julian Clark
Marketing Engineer

(€ 22