## PRODUCT INFORMATION PACKET



Model No: 182TTFN4557 Catalog No: 182TTFN4557 3,1765,TEFC,182T,3,60/50,230/460//190/380






## Nameplate Specifications


Phase	3	Output HP	3 & 2 Hp			
Output KW	2.2 & 1.5 kW	Voltage	230/460 & 190/380 V			
Speed	1765 & rpm	Service Factor	1.15 & 1.15			
Frame	182T	Enclosure	Totally Enclosed Fan Cooled			
Thermal Protection	No Protection	Efficiency	87.5 %			
Ambient Temperature	40 °C	Frequency	60 & 50 Hz			
Current	8.4/4.2 & 7.2/3.6 A	Power Factor	76.4			
Duty	Continuous	Insulation Class	F			
Design Code	В	KVA Code	К			
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6206			
UL	Recognized	CSA	Υ			
CE	Υ	IP Code	55			
Number of Speeds	1					

## **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line				
Poles	4	Rotation	Reversible				
Resistance Main	0 Ohms	Mounting	Rigid Base				
Motor Orientation	Horizontal	Drive End Bearing	Ball				
Opp Drive End Bearing	Ball	Frame Material	Cast Iron				
Shaft Type	Т	Assembly/Box Mounting	F1/F2 CAPABLE				
Outline Drawing	035662-800	Connection Drawing	005010.01ME				

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

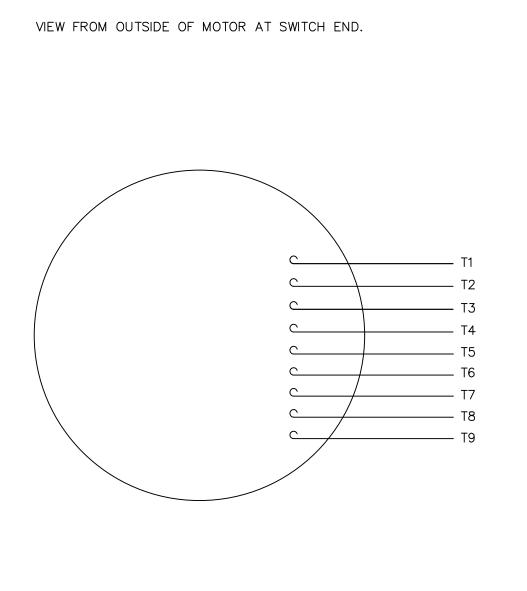

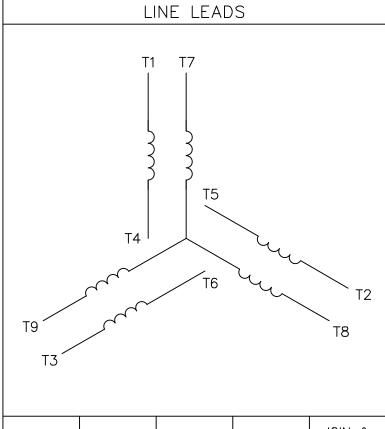

VOLTAGE	L1	L2	JOIN & INSULATE	
HIGH	T1	T2	Т3	(T4,T7) (T5,T8) (T6,T9)
LOW	T1,T7	T2,T8	T3,T9	T4,T5,T6

							l .						
				TOL UNLES	ERANCES S SPECIFIED						DRAWN	RDW 04/1	2/02
				DEC.	INCHES	]   (((()))					СНК		
				.x	±.1						APPD		
				.xx	±.01	TITLE	EXTERNAL WIRING DIAGRAM				SCALE	1=1	
				.xxx	±.005	]	3 PHASE W/O PROTECTOR		REF	FIG.2-51			
				.xxxx	±.0005	MAT'L. DECAL - 004014			FMF				
NC	. REVISION	BY & DATE	СНК	ANG	±1/2°	FINISH			PREV	PREV			
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED		RFP	04	4/12/02	CAD FILE	0050100	1ME	SIZE	DRAWING N			REV.	
		DIST					A 0050			)10-C	1ME		