PRODUCT INFORMATION PACKET



Model No: 182TTFW14004 Catalog No: C203B General Purpose Motor, 3 & 2 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM,

182TC Frame, TEFC



Product Information Packet: Model No: 182TTFW14004, Catalog No:C203B General Purpose Motor, 3 & 2 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM, 182TC Frame, TEFC




Nameplate Specifications


| Phase | 3 | Output HP | 3 & 2 Hp | | | |
|------------------------|---------------------|----------------------------|-----------------------------|--|--|--|
| Output KW | 2.2 & 1.5 kW | Voltage | 230/460 & 190/380 V | | | |
| Speed | 3510 & 2940 rpm | Service Factor | 1.15 & 1.0 | | | |
| Frame | 182TC | Enclosure | Totally Enclosed Fan Cooled | | | |
| Thermal Protection | No Protection | Efficiency | 85.5 & 85.5 % | | | |
| Ambient Temperature | 40 °C | Frequency | 60 & 50 Hz | | | |
| Current | 7.4/3.7 & 6.2/3.1 A | Power Factor | 88 | | | |
| Duty | Continuous | Insulation Class | F | | | |
| Design Code | В | KVA Code | К | | | |
| Drive End Bearing Size | 6206 | Opp Drive End Bearing Size | 6205 | | | |
| UL | Recognized | CSA | Υ | | | |
| CE | Υ | IP Code | 43 | | | |
| Number of Speeds | 1 | | | | | |


Technical Specifications

| Electrical Type | Squirrel Cage Induction Run | Starting Method | Across The Line | | | |
|-----------------------|-----------------------------|-----------------------|-----------------|--|--|--|
| Poles | 2 | Rotation | Reversible | | | |
| Resistance Main | 5.16 Ohms | Mounting | Round | | | |
| Motor Orientation | Horizontal | Drive End Bearing | Ball | | | |
| Opp Drive End Bearing | Ball | Frame Material | Rolled Steel | | | |
| Shaft Type | Т | Overall Length | 13.97 in | | | |
| Frame Length | 8.50 in | Shaft Diameter | 1.125 in | | | |
| Shaft Extension | 2.75 in | Assembly/Box Mounting | F1 ONLY | | | |
| Outline Drawing | 035541-850 | Connection Drawing | 005010.01ME | | | |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

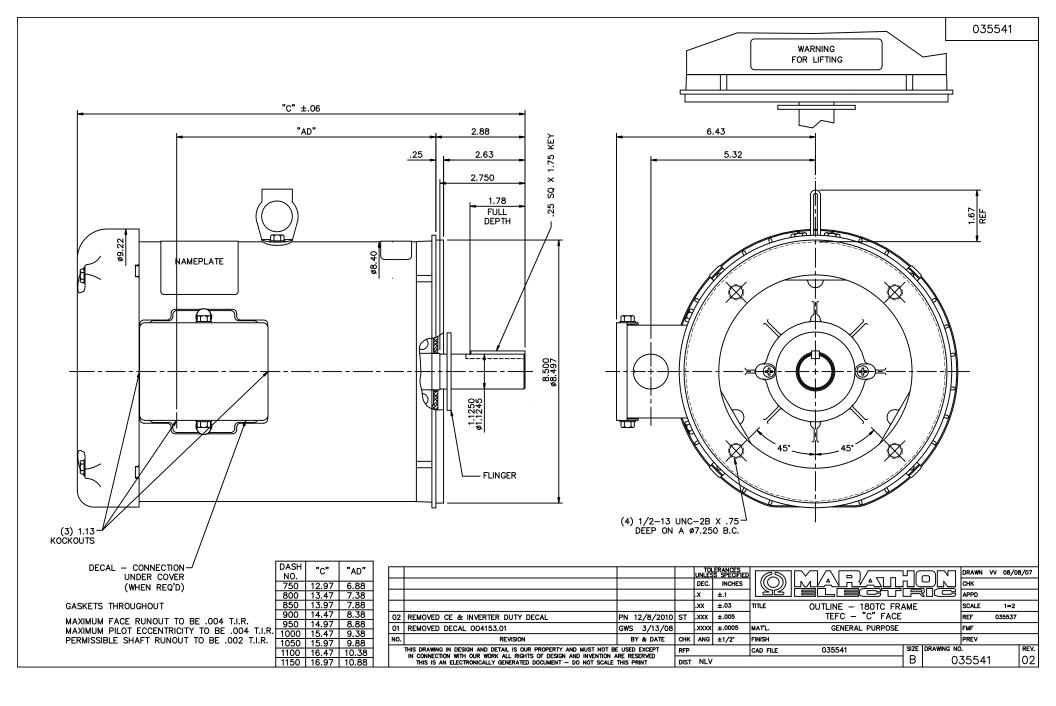

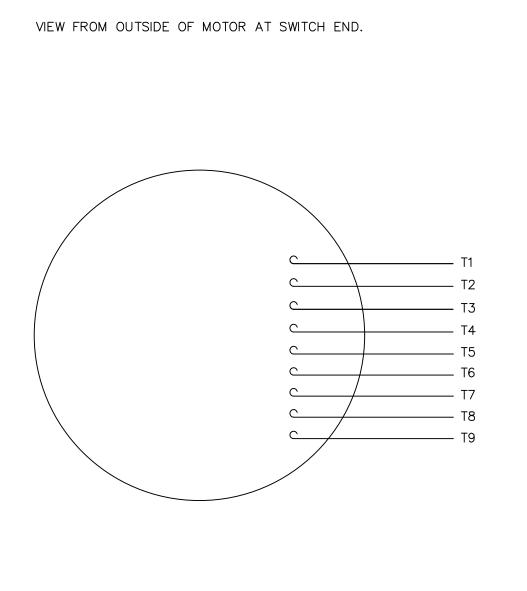

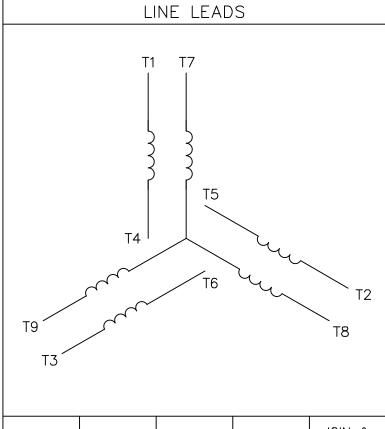

| VOLTAGE | L1 | L2 | L3 | JOIN & INSULATE | | |
|---------|-------|-------|-------|-------------------------------|--|--|
| HIGH | T1 | T2 | Т3 | (T4,T7) (T5,T8) (T6,T9) | | |
| LOW | T1,T7 | T2,T8 | T3,T9 | T4,T5,T6 | | |

| | | | | | | | | l . | | | | | |
|----|--|-----------|------|--------------|------------------------|-----------------------|-------------------------|--------------------|-----------|-------|----------|----------|------|
| | | | | TOL UNLES | ERANCES S SPECIFIED | | | | | | | RDW 04/1 | 2/02 |
| | | | | DEC. | INCHES |] (((())) | | | | | СНК | | |
| | | | | .x | ±.1 | | | | | | APPD | | |
| | | | | .xx | ±.01 | TITLE | EXTERNAL WIRING DIAGRAM | | | SCALE | 1=1 | | |
| | | | | .xxx | ±.005 |] | 3 PHASE W/O PROTECTOR | | | REF | FIG.2-51 | | |
| | | | | .xxxx | ±.0005 | MAT'L. DECAL - 004014 | | | FMF | | | | |
| NC | . REVISION | BY & DATE | СНК | ANG | ±1/2° | FINISH | | | | PREV | | | |
| | | RFP | 04 | 4/12/02 | CAD FILE | 0050100 | 1ME | SIZE | DRAWING N | | | REV. | |
| | IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT | | DIST | | | | | $\neg A \mid 0050$ | |)10-C | 1ME | | |