# PRODUCT INFORMATION PACKET



Model No: 184TTFC6001 Catalog No: GT1012

Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V,

3600 & 3000 RPM, 184T Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E






## Nameplate Specifications


Phase	3	Output HP	5 & 3 Hp
Output KW	3.7 & 2.2 kW	Voltage	230/460 & 190/380 V
Speed	3495 & 2920 rpm	Service Factor	1.15 & 1.15
Frame	184T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	90.2 & 89.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	12/6 & 8.6/4.3 A	Power Factor	88.5
Duty	Continuous	Insulation Class	F
Design Code	Α	KVA Code	J
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

## **Technical Specifications**

Electrical Type Squirrel Cage Induction Run		Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	1.98 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Overall Length	14.80 in
Shaft Diameter	1.125 in	Shaft Extension	2.75 in
Assembly/Box Mounting	F1/F2 Capable		
Connection Drawing	A-EE7308	Outline Drawing	SS620290-184T

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

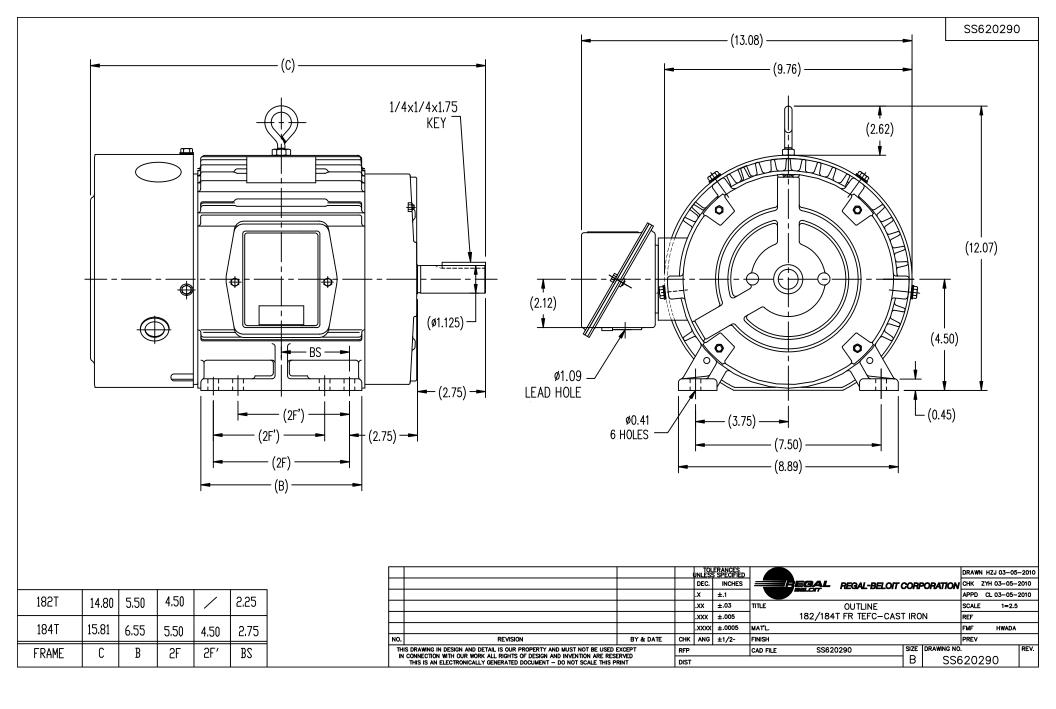

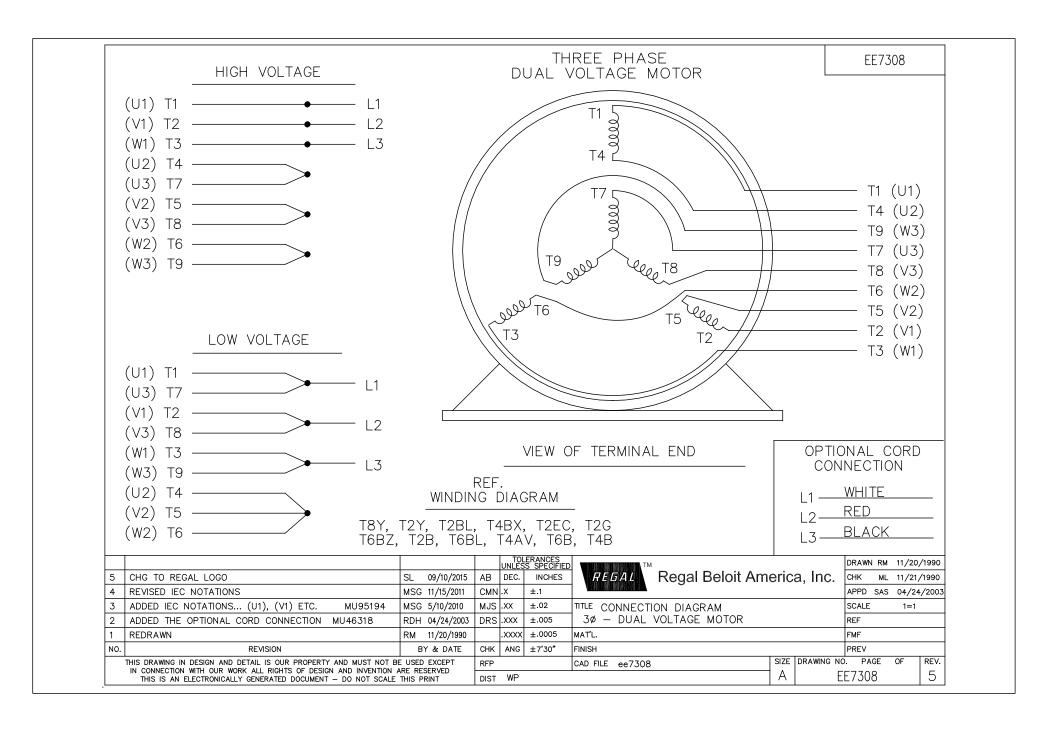

#### **CERTIFICATION DATA SHEET**

 Model#:
 184TTFC6001 BB
 WINDING#:
 CHT18420005 NONE 1

 CONN. DIAGRAM:
 A-EE7308
 ASSEMBLY:
 F1/F2 CAPABLE

F.L. RPM

SYNC. RPM

OUTLINE: B-SS620290

KW

ΗP

#### **TYPICAL MOTOR PERFORMANCE DATA**

5&3	3.70&2	2.24	3600	3495&2920	184T	TEF	с	J	Α
РН	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION

FRAME

**ENCLOSURE** 

**KVA CODE** 

DESIGN

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#190/	12/6&8.6/4.3	ACROSS THE	CONTINUOU	F7	1.15/1.15	40	3300
		380		LINE	S				

FULL LOAD EFF: 90.2&89.5	3/4 LOAD EFF: 88.5	1/2 LOAD EFF: 86.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 88.5&85	3/4 LOAD PF: 84	1/2 LOAD PF: 74	87.5	SQ CAGE IND RUN	4.6 / 2.3

F.L. TORQUE LOCKED ROTOR AMPS		L.R. TORQUE	B.D. TORQUE	F.L. RISE°C	
7.5 LB-FT	88 / 44	15.3 LB-FT 206	24.7 LB-FT 332	45	

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
72 dBA	82 dBA	0.28 LB-FT^2	5 LB-FT^2	15 SEC.	2	110 LBS.

### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	1045 HOT	CAST IRON
6206	6205					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: NONE INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

N O T E S

> DATE: 06/28/2017 07:16:26 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

