PRODUCT INFORMATION PACKET



Model No: 192019.30 Catalog No: 192019.30

Obsolete,

replaced by 192019.00 -.1/4HP-0.18kW..1200RPM.D71C.TEFC.230/460V.3PH.60HZ.CONT.40C..B3 / B14......






Nameplate Specifications


Phase	3	Output HP	0.25 & 0.25 Hp			
Output KW	0.19 & 0.19 kW	Voltage	230/460 & 200/400 V			
Speed	1105 & 885 rpm	Service Factor	1.15 & 1.0			
Frame	D71C	Enclosure	Totally Enclosed Fan Cooled			
Thermal Protection	No Protection	Efficiency	66 & 62 %			
Ambient Temperature	40 °C	Frequency	60 & 50 Hz			
Current	1.2/0.6 & 1.2/0.6 A	Power Factor	62			
Duty	Continuous	Insulation Class	F			
Design Code	NO DESIGN CODE	KVA Code	G			
Drive End Bearing Size	6202	Opp Drive End Bearing Size	6202			
UL	Recognized	CSA	Υ			
CE	Υ	IP Code	Totally Enclosed Fan Cooled 66 & 62 % 60 & 50 Hz 62 F G 6202			
Number of Speeds	1					

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter		
Poles	6	Rotation	Reversible		
Resistance Main	0 Ohms	Mounting	В3		
Motor Orientation	Horizontal Or Up Or Down	Drive End Bearing	Ball		
Opp Drive End Bearing	Ball	Frame Material	Aluminum		
Shaft Type	IEC	Assembly/Box Mounting	F3		
Inverter Load	CONOTANT OF 4				
inverter Load	CONSTANT 20:1				

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

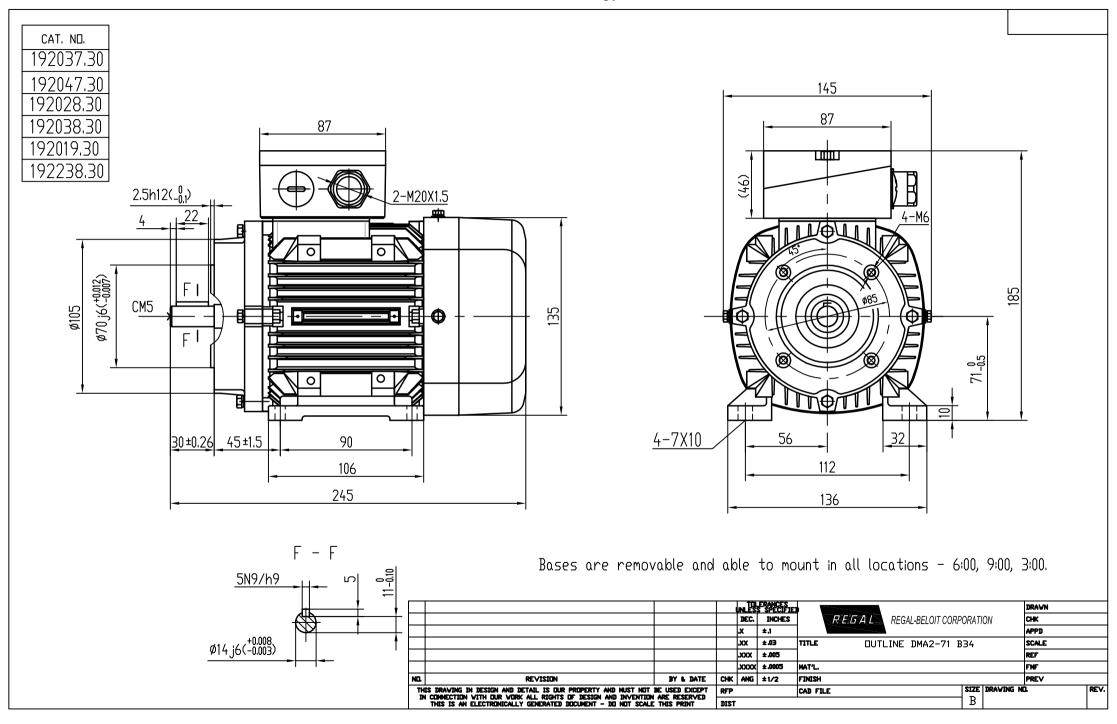

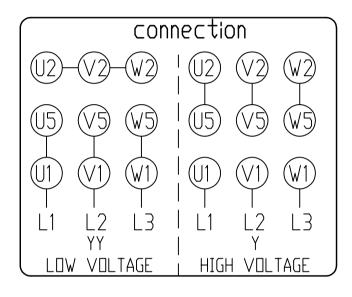

				UNLES	LERANCES S SPECIFIE	***************************************			DRAWN	
				DEC.		R E G A L REGAL-BELOIT CORPORATION		ON	CHK	
				.x	±.1				APPD	
				.xx	±.03	TITLE 230V / 460V connection drawing		SCALE		
				жхх	±.005	YY/Y -		REF		
				.xxx	±.0005	MAT'L.		FMF		
ND.	REVISION	BY & DATE	CHK	ANG	±1/2	FINISH			PREV	
THIS DRAWING IN DESIGN AND DETAIL IS DUR PROPERTY AND MUST NOT BE USED EXCEPT		RFP CAD FILE SI		SIZE	DRAWING NO	3.	REV.			
IN CONNECTION VITH OUR VORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT			TZIG	•		•	1 B I			