PRODUCT INFORMATION PACKET



Model No: 192044.30 Catalog No: 192044.30

Obsolete Replaced by 192044.00..3/4HP-0.55kW..3600RPM.D71D.TEFC.230/460V.3PH.60HZ.CONT.40C..B3 / B5

.....










Nameplate Specifications


Phase	3	Output HP	0.75 & 0.75 Hp
Output KW	0.56 & 0.56 kW	Voltage	230/460 & 200/400 V
Speed	3455 & 2795 rpm	Service Factor	1.15 & 1.0
Frame	D71D	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	78 & 74 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	2.4/1.2 & 2.8/1.4 A	Power Factor	74
Duty	Continuous	Insulation Class	F
Design Code	NO DESIGN CODE	KVA Code	J
Drive End Bearing Size	6202	Opp Drive End Bearing Size	6202
UL	Recognized	CSA	Υ
CE	Υ	IP Code	55
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	2	Rotation	Reversible
Resistance Main	7.7 Ohms	Mounting	В3
Motor Orientation	Horizontal Or Up Or Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Aluminum
Shaft Type	IEC	Assembly/Box Mounting	F3
Inverter Load	CONSTANT 20:1		
Outline Drawing	OL19204430	Connection Drawing	00546505

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

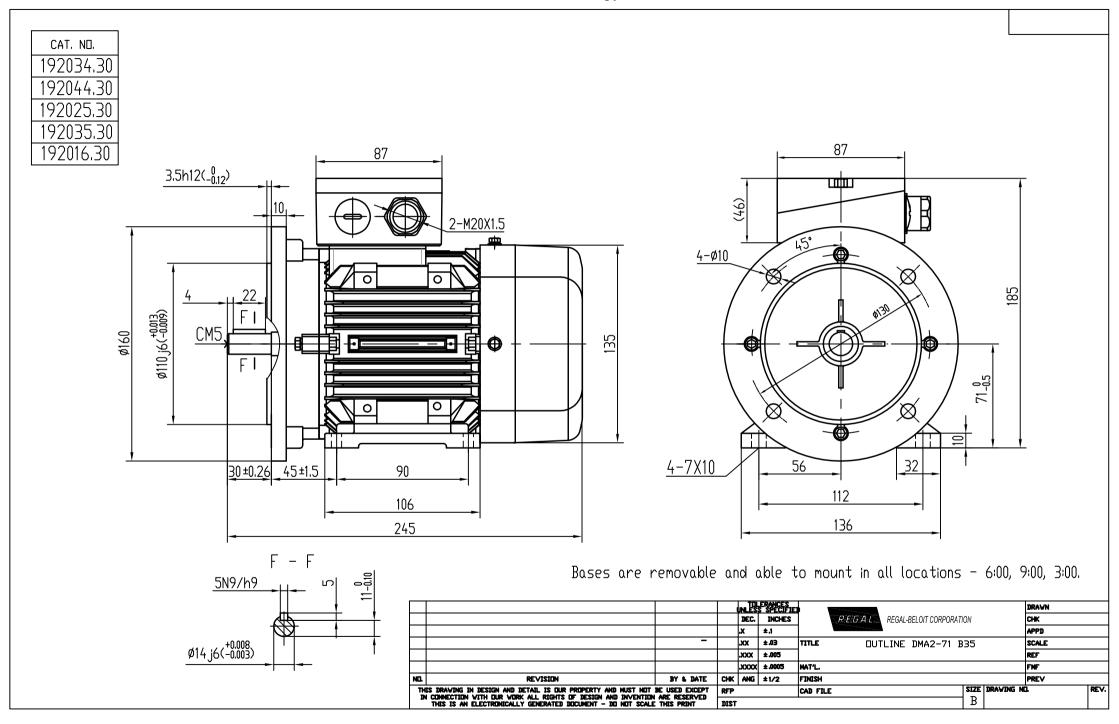

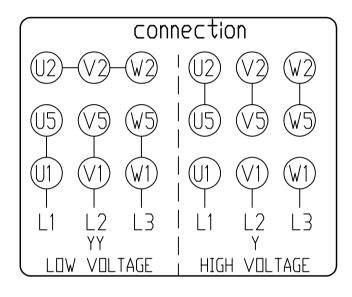

				UNLES	LERANCES S SPECIFIE	***************************************			DRAWN	
				DEC.		R E G A L REGAL-BELOIT CORPORATION		ON	CHK	
				.x	±.1				APPD	
				.xx	±.03	TITLE 230V / 460V connection drawing		SCALE		
				жхх	±.005	YY/Y -			REF	
				.xxx	±.0005	MAT'L.		FMF		
ND.	REVISION	BY & DATE	CHK	ANG	±1/2	FINISH			PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT		RFP	RFP CAD FILE		SIZE	DRAWING NO	3.	REV.		
IN CONNECTION VITH OUR VORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT		TZIG			1 B I					