
PRODUCT INFORMATION PACKET



Model No: 199011.00 Catalog No: 199011.00 BSOLETE REPLACED BY B199011.00 ..7 1/2HP..1200RPM.254T.TEFC.230/460V.3PH.60HZ.CONT.40C.1.14SF.RIG D......GENERAL PURPOSE.......





Product Information Packet: Model No: 199011.00, Catalog No:199011.00 OBSOLETE REPLACED BY B199011.00 ..7 1/2HP..1200RPM.254T.TEFC.230/460V.3PH.60HZ.CONT.40C.1.14SF.RIGID.....GENERAL PURPOSE......




Nameplate Specifications

| Phase | 3 | Output HP | 7.50 & 5 Hp |
|------------------------|------------------------|----------------------------|-----------------------------|
| Output KW | 5.6 & 3.7 kW | Voltage | 230/460 & 190/380 V |
| Speed | 1182 & 985 rpm | Service Factor | 1.15 & 1.15 |
| Frame | 254T | Enclosure | Totally Enclosed Fan Cooled |
| Thermal Protection | No Protection | Efficiency | 91 & 90.2 % |
| Ambient Temperature | 40 °C | Frequency | 60 & 50 Hz |
| Current | 20.4/10.2 & 17.4/8.7 A | Power Factor | 74 |
| Duty | Continuous | Insulation Class | F |
| Design Code | В | KVA Code | G |
| Drive End Bearing Size | 6309 | Opp Drive End Bearing Size | 6209 |
| UL | Recognized | CSA | Y |
| CE | Ν | IP Code | 43 |
| Number of Speeds | 1 | | |

Technical Specifications

| Electrical Type | Squirrel Cage Inverter Rated | Starting Method | Line Or Inverter | |
|-----------------------|------------------------------|-----------------------|------------------|--|
| Poles | 6 | Rotation | Reversible | |
| Resistance Main | 1.32 Ohms | Mounting | Rigid Base | |
| Motor Orientation | Horizontal | Drive End Bearing | Ball | |
| Opp Drive End Bearing | Ball | Frame Material | Cast Iron | |
| Shaft Type | т | Assembly/Box Mounting | F1/F2 CAPABLE | |
| Inverter Load | CONSTANT 20:1 | | | |
| Outline Drawing | SS620244-254T | Connection Drawing | EE7308K-LE | |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

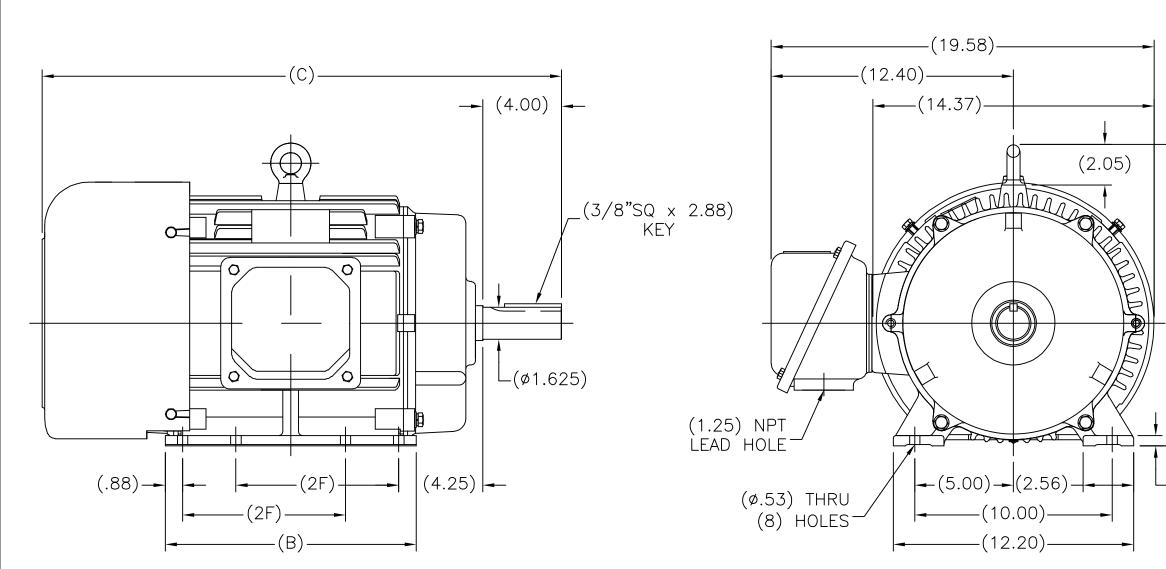


(MAY NOT BE DRAWN TO SCALE)


(DIMENSIONS IN TABLE ARE CONSIDERED REFFERENCE)

| 254T | 26.60 | 12.80 | 8.25 |
|-------|-------|-------|-------|
| 256T | 27.80 | 13.98 | 10.00 |
| FRAME | С | В | 2F |

| | | | | TOL | ERANCES S SPECIFIED | | | |
|-----|---|----------------|------|-------|------------------------|---------------------------|--------|------|
| | | | | DEC. | INCHES | REGAL Regal Beloit Americ | a, Ind | Ξ. |
| | | | | .x | ±.1 | | | |
| | | | | .xx | ±.03 | | | |
| | | | | .xxx | ±.005 | 254T FR. – TEFC | | |
| D | CHANGED BORDER LOGO TO "REGAL" ECO-0075536 | WGJ 04-09-2015 | EH | .xxxx | ±.0005 | MAT'L. | | |
| NO. | REVISION | BY & DATE | СНК | ANG | ±7'30" | FINISH | | |
| | THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED | | RFP | 01 | -14-2010 | CAD FILE SS620244 | SIZE | DRAW |
| | IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT | | DIST | | | | 7 B | |

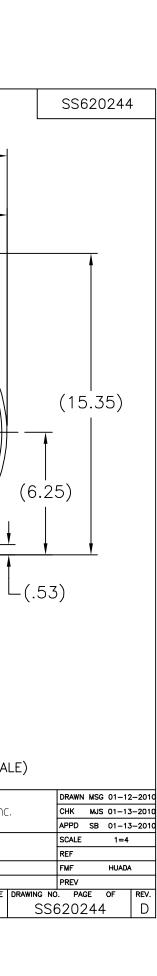

| | | | | | LERANCES SS SPECIFIED | | MO. | TORS | DRAWN | KJC 0 | -27-2003 |
|---|---------------------|----------------|-----|-------|--------------------------|----------------------------|-------|------------|-------|-------|----------|
| | | | | DEC. | | (LEESON) GEARM | | | снк | ML 01 | -28-2003 |
| | | | | .x | ±.1 | AND | DRIVE | ES | APPD | TB 01 | -28-2003 |
| | | | | .xx | ±.02 | TITLE CONNECTION DIAGRAM | | | SCALE | | 1.5=1 |
| | | | | .xxx | ±.005 | DELTA CONN. – 30 – 9 LEADS | | | REF | | |
| 01 | NEW DRAWING CN36099 | KJC 01-28-2003 | TB | .xxxx | ±.0005 | MAT'L. | | | FMF | | |
| NO. | REVISION | BY & DATE | СНК | ANG | ±7'30" | FINISH | | | PREV | | |
| THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT | | | | | | CAD FILE EE7308K-LE | SIZE | DRAWING NC | . PAG | E O | F REV |
| IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT | | | | WP | | | A | EE7 | 308K- | -LE | 01 |

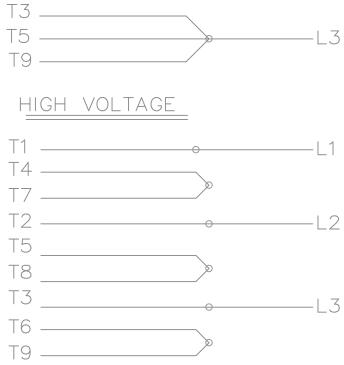

____ 1

-L2

LOW VOLTAGE


T1 _____ T6 _____

Τ2_____

Τ4_____

Т8 ———

Τ7 ———

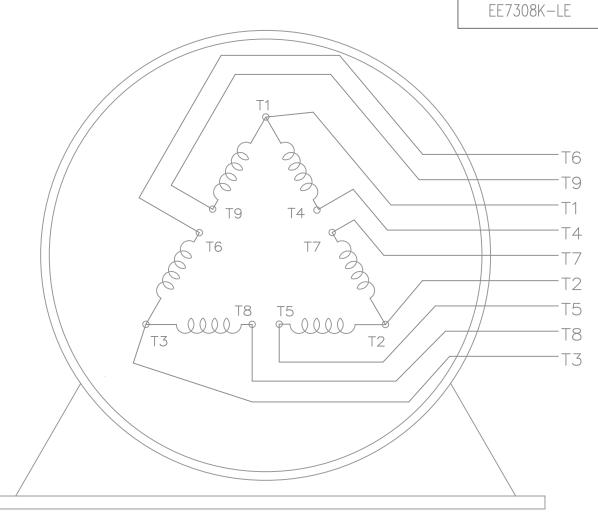

VIEW OF TERMINAL END

4 of 4