# PRODUCT INFORMATION PACKET



Model No: 199093.00 Catalog No: 199093.00

OBSOLETE Replaced by B199093.00 - ..3..1800.182JP.TEFC.230/460.3.60/50HZ.CONT.40C..RIGID C-FACE....

......





Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



### Nameplate Specifications


Phase	3	Output HP 3 & 2 Hp	
Output KW	2.2 & 1.5 kW	Voltage	230/460 & 190/380 V
Speed	1750 & 1467 rpm	Service Factor	1.15 & 1.0
Frame	182JP	182JP Enclosure To	
Thermal Protection	No Protection	No Protection Efficiency 89.5 & 88.	
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	<b>7.8/3.9 &amp; 6/3 A</b> Power Factor		84
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	К
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter	
Poles	4	Rotation	Reversible	
Resistance Main	3.76 Ohms	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel	
Shaft Type	JP	Assembly/Box Mounting	F1/F2 CAPABLE	
Inverter Load	VARIABLE 10:1			
Outline Drawing	SS620562-182TC	Connection Drawing	EE7308	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

SS620562

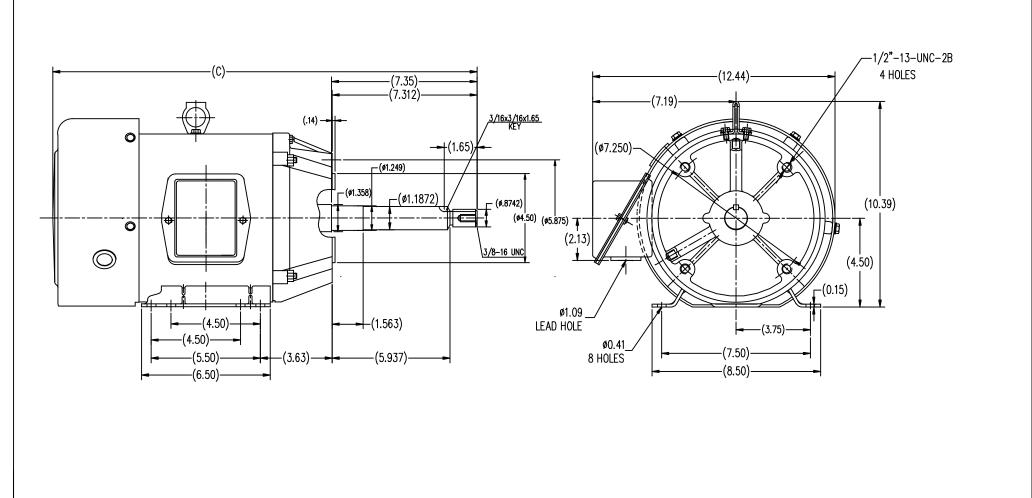

						UNLES	ERANCES S SPECIFIED			DRAWN	ZXC 5-21-201
						DEC.		FEGAL REGAL-BELO	OIT CORPORATION	СНК	
						.x	±.1			APPD	
						.xx	±.03	TITLE OUTLINE		SCALE	1=4
TTED 400TO	19.067					.xxx	±.005	TEFC-182/184JP-FR-RC	LLED STEEL	REF	
TTFB 182TC	19.007					.xxxx	±.0005	MAT*L.		FMF	HWADA
TTFB 184TC	20.047	NO.	REVISION	BY & DATE	СНК	ANG	±1/2	FINISH		PREV	
<u> </u>			S DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED I		RFP			CAD FILE SS620562	SIZE DRAWING N		RE\
FRAME	C	"	CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESI THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PI		DIST				□B  SS	6205	52





#### **CERTIFICATION DATA SHEET**

# 1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

**CONN. DIAGRAM:** EE7308 **CATALOG #:** 199093.00

**OUTLINE:** SS620562 **MOUNTING:** F1/F2 CAPABLE

**WINDING #:** CHT18240007 1

#### TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
3&2	2.24&1.49	1800	1750&1467	182JP	TEFC	K	В

РН	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	амв°С
3	60/50	230/460&190/380	7.8/3.9&6/3	LINE OR INVERTER	CONTINUOUS	F3	1.15/1.0	40

FULL LOAD EFF:	89.5&88.5	3/4 LOAD EFF:	88.5	1/2 LOAD EFF:	87.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	84&82	3/4 LOAD PF:	78	1/2 LOAD PF:	68	88.5	SQ CAGE INV RATED

F.L. TORQUE	UE LOCKED ROTOR AMPS		L.R. TORQUE			B.D. TOR	F.L. RISE°C	
9 <b>LB-FT</b>	64 / 32	21	LB-FT	233 %	29	LB-FT	322 %	55

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX, WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
62 <b>dBA</b>	72 <b>dBA</b>	0.4 LB-FT^2	40 <b>LB-FT^2</b>	25 <b>SEC.</b>	2	95 <b>LBS.</b>

#### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE - LEESON (ENAMEL)

BEAR	INGS	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFT TIPE SPECIAL DE		SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	DOLVDEY EM ID		JP NONE		1045 HOT DOLLED (C 204)	DOLLED CITE	
6206	6205 POLYREX EM JI		JP	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL	

	THERMO-PROTE	CTORS	THERMICTORS	CONTROL	CDACE HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE <b>VOLTS</b>

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE
ENCODER: NONE
NONE NONE PPR
BRAKE: NONE NONE
NONE P/N NONE NONE NONE
FT-LB NONE V NONE Hz

