PRODUCT INFORMATION PACKET

Model No: 199096.00 Catalog No: 199096.00 Obsolete Replaced by B199096.00..7.5..3600.213JP.TEFC.230/460.3.60/50HZ.CONT.40C..RIGID C-FACE.....

.....



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Product Information Packet: Model No: 199096.00, Catalog No:199096.00 Obsolete Replaced by B199096.00..7.5..3600.213JP.TEFC.230/460.3.60/50HZ.CONT.40C..RIGID C-FACE.....




Nameplate Specifications

3	Output HP	7.50 & 5 Hp
5.6 & 3.7 kW	Voltage	230/460 & 190/380 V
3525 & 2930 rpm	Service Factor	1.15 & 1.15
213JP	Enclosure	Totally Enclosed Fan Cooled
No Protection	Efficiency	89.5 & 91 %
40 °C	Frequency	60 & 50 Hz
17.8/8.9 & 14.4/7.2 A	Power Factor	88
Continuous	Insulation Class	F
В	KVA Code	G
6307	Opp Drive End Bearing Size	6306
Recognized	CSA	Y
Y	IP Code	43
1		
	5.6 & 3.7 kW 3525 & 2930 rpm 213JP No Protection 40 °C 17.8/8.9 & 14.4/7.2 A Continuous B 6307 Recognized	5.6 & 3.7 kWVoltage3525 & 2930 rpmService Factor213JPEnclosureNo ProtectionEfficiency40 °CFrequency17.8/8.9 & 14.4/7.2 APower FactorContinuousInsulation ClassBKVA Code6307Opp Drive End Bearing SizeRecognizedCSA

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter	
Poles	2	Rotation	Reversible	
Resistance Main	.805 Ohms	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Cast Iron	
Shaft Type	JP	Assembly/Box Mounting	F1/F2 CAPABLE	
Inverter Load	VARIABLE 10:1			
Outline Drawing	SS620563	Connection Drawing	EE7308	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

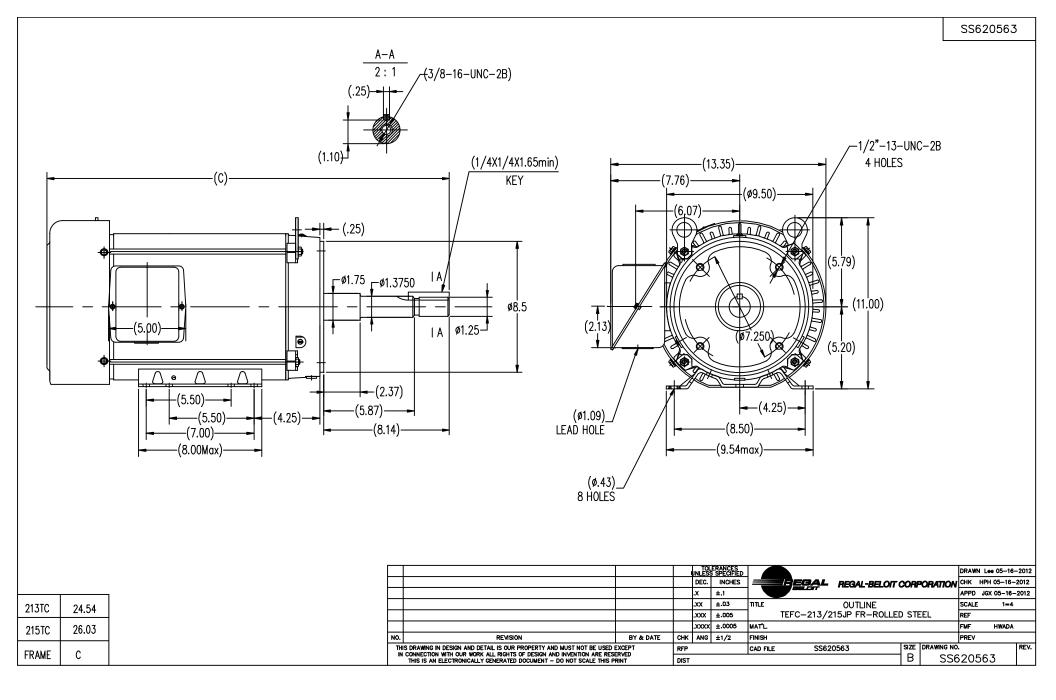

Uncontrolled Copy





CERTIFICATION DATA SHEET

1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CONN. DIAGRAM: EE7308

CATALOG #: 199096.00

OUTLINE: SS620563 WINDING #: CHT21320005 1

MOUNTING: F1/F2 CAPABLE

TYPICAL MOTOR PERFORMANCE DATA	
--------------------------------	--

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
7 1/2&5	5.60&3.70	3600	3525&2930	213JP	TEFC	G	В

РН	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
3	60/50	230/460&190/380	17.8/8.9&14.4/7.2	LINE OR INVERTER	CONTINUOUS	F3	1.15/1.15	40

FULL LOAD EFF:	89.5&91	3/4 LOAD EFF:	89.5	1/2 LOAD EFF:	88.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	88&85.5	3/4 LOAD PF:	84	1/2 LOAD PF:	75.5	88.5	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
11.2 LB-FT	116 / 58	22.8 LB-FT 205 %	26.8 LB-FT 240 %	40

SOUND PRESSURE @ 3 FT.		SOUND	POWER	ROTOR WK^2		MAX. WK^2		SAFE STALL TIME		STARTS / HOUR	APPROX. MOTOR WGT	
72	dBA	82	dBA	0.32	LB-FT^2	12	LB-FT^2	20	SEC.	2	146	LBS.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE - LEESON (ENAMEL)

BEAR	BEARINGS GREASE SH		SHAFT TYPE		SPECIAL ODE	SHAFT	FRAME
DE			SHAFT TTPE	SHAFT TYPE SPECIAL DE		MATERIAL	MATERIAL
BALL	BALL		10	NONE	NONE		
6307	6306	POLYREX EM JP		NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON

	THERMO-PROTE	CTORS		TUERMACTORS	CONTROL	SPACE HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE	HEATERS
NONE	NOT	NONE	NONE	NONE	FALSE	NONE	VOLTS
*				INVERTER TORQUE: INV. HP SPEED RAN		10:1	
Ν				ENCODER: NONE			
0				NONE NONE NONE			
т				BRAKE: NONE	NONE		
_				NONE P/N NO	NE		
E				NONE NONE			
S				FT-LB NONE	V NONE	Hz	

Uncontrolled Copy

