PRODUCT INFORMATION PACKET



Model No: 199689.00 Catalog No: 199689.00 Ultimate e[™] General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM, 182T Frame, DP



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 199689.00, Catalog No:199689.00 Ultimate e[™] General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM, 182T Frame, DP

LEESON


Nameplate Specifications

Phase	3	Output HP	5 & 3 Hp
Output KW	3.7 & 2.2 kW	Voltage	230/460 & 190/380 V
Speed	3460 & 3915 rpm	Service Factor	1.15 & 1.15
Frame	182T	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	87.5 & 88.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	12.4/6.2 & 9/4.5 A	Power Factor	88
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6203
UL	Recognized	CSA	Y
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	2	Rotation	Reversible
Resistance Main	3.05 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Overall Length	13.72 in
Frame Length	6.75 in	Shaft Diameter	1.125 in
Shaft Extension	2.75 in	Assembly/Box Mounting	F1 ONLY
Inverter Load	VARIABLE 10:1		
Outline Drawing	SS620292-182T	Connection Drawing	EE7308

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

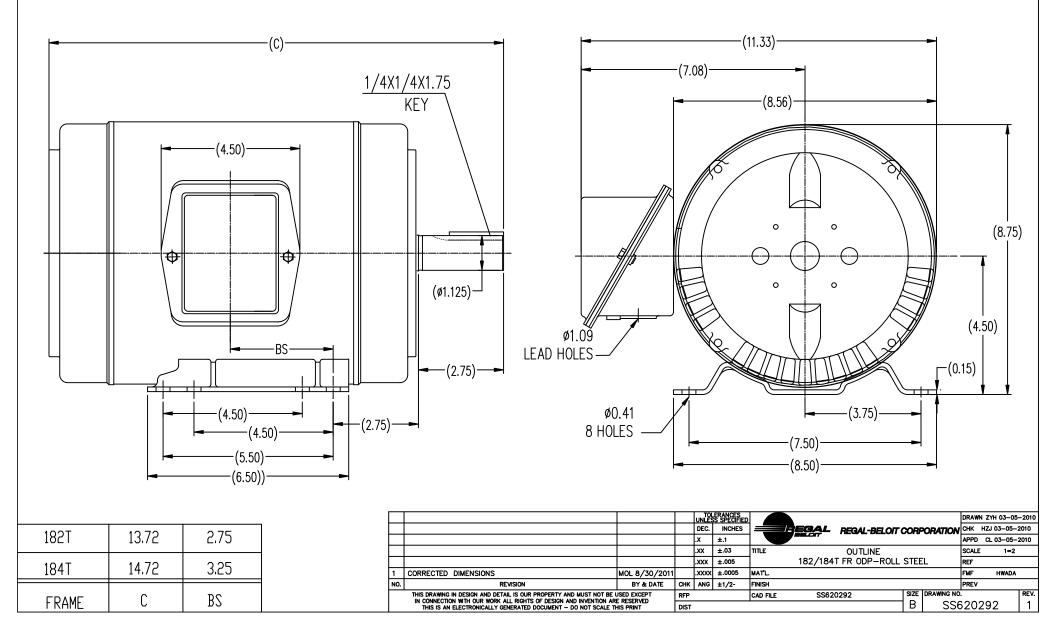

Uncontrolled Copy



Uncontrolled Copy



1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CATALOG #: 199689.00

CONN. DIAGRAM: EE7308

MOUNTING: F1 ONLY

OUTLINE: SS620292-182T **WINDING #:** CHT18220006

1

TYPICAL MOTOR PERFORMANCE DATA

НР	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
5&3	3.70&2.24	3600	3460&3915	182T	DP	Н	В

РН	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	АМВ°С
3	60/50	230/460&190/380	12.4/6.2&9/4.5	LINE OR INVERTER	CONTINUOUS	F7	1.15/1.15	40

FULL LOAD EFF:	87.5&88.5	3/4 LOAD EFF:	87.5	1/2 LOAD EFF:	86.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	88&83	3/4 LOAD PF:	84	1/2 LOAD PF:	74	85.5	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS	L.	R. TORQUE	E	3.D. TORQ	UE	F.L. RISE°C
7.6 LB-FT	76 / 38	17	LB-FT 224 %	22.5	LB-FT	296 %	55

SOUND PRE @ 3 F		SOUND	POWER	ROTO	DR WK^2	MAX	K. WK^2	SAFE ST	ALL TIME	STARTS / HOUR		ROX. R WGT
55 c	dBA	65	dBA	0.2	LB-FT^2	10	LB-FT^2	10	SEC.	2	75	LBS.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEAR	RINGS	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	ODE	GREASE	SHAFTTTPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL
BALL	BALL		Ŧ	NONE	NONE		
6206	POLYREX EM		I	NONE	NONE	AISI 1045 (C-240)	ROLLED STEEL

	THERMO-PROTE	CTORS		TUERMICTORC	CONTROL	SPACE HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	- THERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS	
*				INVERTER TORQUE: INV. HP SPEED RANG		10:1	
Ν				ENCODER: NONE			
0				NONE NONE NONE	PPR		
т			·	BRAKE: NONE	NONE		
E				NONE P/N NO NONE NONE			
S				NONE FT-LB NO	ONE V	NONE HZ	

Uncontrolled Copy

Date	1/92	/2018		Data S	Sheet			199689.00		
Dale					SON			133003.00		-
				Moto	or Load Data	®		Data	@ 460	v
oad	0%	25%	50%	75%	100%	115%	125%	LR		
current (Amps)	2.40	2.60	3.6	4.8	5.9	6.8	7.5	38.0		
orque (ft-lb)	0.00	1.80	3.7	5.6	7.6	8.8	9.6	17.0		
PM	3600	3570	3538	3502	3495	3,475	3450	0		
fficiency (%)	7.0	84.0 52.0	86.5 74.0	87.5 84.0	86.5 90.0	86.5 90.0	85.5 90.0	61.0		_
.F. (%)		1		64.0	90.0	90.0	90.0	61.0		
		Motor Speed D	ata							
	LR	Pull-Up	BD	Rated	ldle					
peed (RPM)	0	1800	2675	3495	3600			nformation Block		
urrent (Amps) orque (ft-lb)	38.0 17.0	34.0 15.0	28.0 22.5	5.9 7.6	2.40 0.00	HP Sync. RPM		5.0 3600		
ique (it-ib)	17.0	13.0	22.5	7.0	0.00	Frame		182		
— E	fficiency (%)	— P.F. (%)	—	Current (Amps)		Enclosure		DP		
						Construction		TDB		
100.0					8.0	Voltage		230/460#190/380	V	
				/		Frequency		60	Hz	
90.0					7.0	Design		B		
						LR Code letter		H		
					6.0	Service Factor		1.15		
F 80.0						Temp Rise @		55	°C	
					A 5.0 M	Duty		CONT		
70.0					5.0 IVI	Ambient		40	°C	
					S	Elevation		1,000	feet	
		/			4.0	Rotor/Shaft wk	2	0.20	Lb-Ft ²	
60.0						Ref Wdg		CHT18220006 NONE		
					3.0	Sound Pressur	e @1M	55	dBA	
	/					VFD Rating		VARIABLE 10:	:1	
50.0					2.0					
						Outline Dwg Conn. Diag		SS620 EE73		
40.0					1.0	Additional Spec	cifications:	22/3	.00	
					1.0	0				
						0	FOU	IV CKT (OHMS / PHASE)		
30.0 + 20%	40%	60% 80%	۶ 100%	120%		R1	R2	X1	X2	Xr
						1.8140	1.3040	4.4510	1.9850	
		LOAD					1.3040		1.0000	
25.0		LOAD	1	Speed -	Torque Ci				40.0	
			1		Torque Ci	urve				
25.0			1		Torque Ci	urve	1.0040		40.0	
			1		Torque Cu	urve	1.5040		40.0	
25.0		LOAD	1		Torque Cu	urve	1.040		40.0	
25.0		LOAD	[]		Torque Ci	urve			40.0 35.0 30.0	
25.0		LOAD			Torque Ci	urve			40.0	
25.0 20.0 T 15.0 O			1		Torque Cu	urve			40.0 35.0 30.0	А
25.0 20.0 T 15.0 R					Torque Cu	urve			40.0 35.0 30.0	A
25.0 20.0 T 15.0 O					Torque Cu	urve			40.0 35.0 30.0 25.0	A
25.0 20.0 T 15.0 Q					Torque Cu	urve			40.0 35.0 30.0 25.0 20.0	A M P
25.0 20.0 T 15.0 R Q U					Torque Cu	urve			40.0 35.0 30.0 25.0	A M P
25.0 20.0 T 15.0 Q U					Torque Ci	urve			40.0 35.0 30.0 25.0 20.0 15.0	A M P
25.0 20.0 T 15.0 R Q U E 10.0					Torque Ci	urve			40.0 35.0 30.0 25.0 20.0	A M P
25.0 20.0 T 15.0 Q U					Torque Ci	urve			40.0 35.0 30.0 25.0 20.0 15.0	A M P
25.0 20.0 T 15.0 Q U E 10.0					Torque Ci	urve			40.0 35.0 30.0 25.0 20.0 15.0	A M P
25.0 20.0 T 15.0 Q U E 10.0					Torque Ci	urve			40.0 35.0 30.0 25.0 20.0 15.0 10.0	A M P
25.0 20.0 T 15.0 R Q U E 10.0 5.0					Torque Ci	urve			40.0 35.0 30.0 25.0 20.0 15.0 10.0 5.0	A M P
25.0 20.0 T 15.0 Q U E 10.0	500	LOAD			Torque Cu	urve	3000	3500	40.0 35.0 30.0 25.0 20.0 15.0 10.0	A M P



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No : 199689.00

(Model No. may contain prefix and/or suffix characters)

Catalog No : 199689.00

Rework No : N/A

Directives :

Low Voltage Directive 2014/35/EU

Harmonized Standards Used :

EN 60034-1: 2010 (IEC 60034-1: 2010) EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A Logsdon

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

(€ 22

Authorized Representative in the Community:

Julian Clark Marketing Engineer