PRODUCT INFORMATION PACKET

Model No: 199964.00 Catalog No: 199964.00 Obsolete Replaced by B199964.00..15..1800.254JM.OPEN.230/460V.3.60/50HZ.CONT.40C..RIGID C-FACE.....

.....



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Product Information Packet: Model No: 199964.00, Catalog No:199964.00 Obsolete Replaced by B199964.00..15..1800.254JM.OPEN.230/460V.3.60/50HZ.CONT.40C..RIGID C-FACE.....




Nameplate Specifications

Phase	3	Output HP	15 & 10 Hp
Output KW	11.2 & 7.5 kW	Voltage	230/460 & 190/380 V
Speed	1773 & 1480 rpm	Service Factor	1.15 & 1.0
Frame	254JM	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	93 & 92.4 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	36.5/18.3 & 31/15.4 A	Power Factor	81
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6208
UL	Recognized	CSA	Υ
CE	Y	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.6729 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	JM	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	VARIABLE 10:1		
Outline Drawing	SS620313	Connection Drawing	EE7308K

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

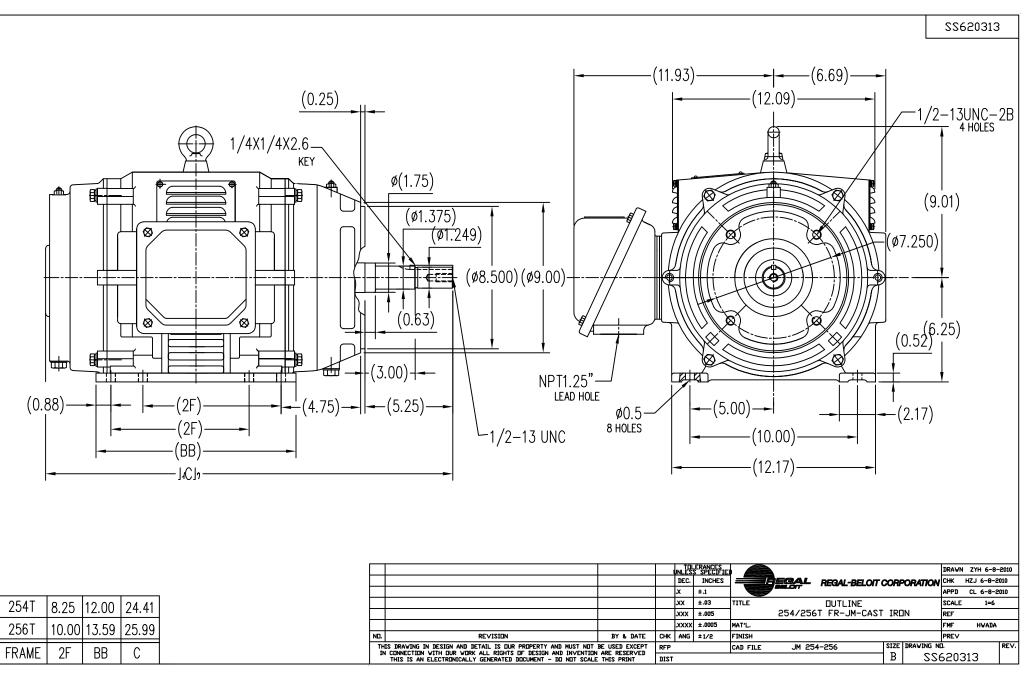

		Unco	ontroll	led Copy					
LOW VOLTAGE								EE	7308K
T1(U1) T6(W2) T7(U3)									
T2(V1) T4(U2) T8(V3)									
T3(W1) T5(V2) T9(W3)				_		T9 T4 T7			-T6(W2) -T9(W3) -T1(U1) -T4(U2)
HIGH VOLTAGE T1(U1) — L1				/	C C	Jon			-T7(U3) -T2(V1) -T5(V2)
T4(U2) T7(U3)							2		-T8(∨3) -T3(W1)
T2(V1)La		/			~				
T5(V2) T8(V3)	/								
T3(W1)L3				/IEW	/ 🗆 F	TERMINAL	END		
T6(W2)									
		l	TOLI UNLESS	ERANCES SPECIFIEI				DRAWN	PGK 06-04-1997
E CORRECTED IEC MARKINGS ECO-0111208	WGJ 01-23-2017	EMH		INCHES	R	EGAL REGAL - BELC	DIT CORPORATION	СНК	ML 06-05-1997
D RE-DRAWN WITH REGAL LOGO ECO-0110493 8 ADDED IEC DESIGNATIONS MU95020	WGJ 09-30-2016	EMH MJS		±.1 ±.02	TITLE			APPD SCALE	GK 06-15-1997
8 ADDED IEC DESIGNATIONS MU95020 7 REVISD HIGH VOLTAGE L2 WAS L3 CN52600-354	MRB 09-21-1998		l	±.02		CONNECTION DIAC Delta Con 30 -		REF	
6 REDRAWN ON CADD	PGK 06-05-1997			±.0005	MAT'L.			FMF	
ND. REVISION	BY & DATE	СНК		±7'30″	FINISH			PREV	
THIS DRAVING IN DESIGN AND DETAIL IS DUR PROPERTY AND MUST NOT		RFP	· · · · ·		CAD FILE	EE7308K	SIZE DRAWING I		
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTIO THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCAL		DIST					A E	E7308	< E



CERTIFICATION DATA SHEET

1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CONN. DIAGRAM: EE7308K

CATALOG #: 199964.00

OUTLINE: SS620313 **WINDING #:** CHT25440004 1

MOUNTING: F1/F2 CAPABLE

НР	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
15&10	11.2&7.50	1800	1773&1480	254JM	DP	G	В

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
3	60/50	230/460&190/380	36.5/18.3&31/15.4	LINE OR INVERTER	CONTINUOUS	F3	1.15/1.0	40

FULL LOAD EFF:	93&92.4	3/4 LOAD EFF:	93	1/2 LOAD EFF:	92.4	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	81&78	3/4 LOAD PF:	76	1/2 LOAD PF:	65	92.4	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
44.5 LB-FT	220 / 110	89 LB-FT 200 %	120 LB-FT 270 %	35

SOUND PRESSURE @ 3 FT.		SOUND POWER		ROTOR WK^2		MAX, WK^2		SAFE STALL TIME		STARTS / HOUR	АРР МОТО	
74	dBA	84	dBA	2.2	LB-FT^2	90	LB-FT^2	20	SEC.	2	300	LBS.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEAR	BEARINGS					SHAFT	FRAME	
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	POLYREX EM	MC	NONE	NONE			
6309			JIVI	NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON	

	THERMO-PROTE	CTORS		THERMICTORS	CONTROL		
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	- THERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS	
*				INVERTER TORQUE: INV. HP SPEED RANG		10:1	
Ν				ENCODER: NONE			
0				NONE NONE NONE	PPR		
т				BRAKE: NONE	NONE		
E				NONE P/N NO NONE NONE			
S				FT-LB NONE	V NONE	Hz	

Uncontrolled Copy

