PRODUCT INFORMATION PACKET



Model No: 199965.00 Catalog No: 199965.00

Obsolete,

replaced be B199965.00 -..20..3600.254JM.OPEN.230/460V.3.60/50HZ.CONT.40C..RIGID C-FACE......






Nameplate Specifications


Phase	3	Output HP	20 & 15 Hp
Output KW	14.9 & 11.2 kW	Voltage	230/460 & 190/380 V
Speed	3540 & 2945 rpm Service Factor		1.15 & 1.0
Frame	254JM	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	91.7 & 91.7 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	45/22.5 & 41/20.5 A	Power Factor	89.5
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6209	Opp Drive End Bearing Size	6208
UL	Recognized	CSA	Υ
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	2	Rotation	Reversible
Resistance Main	.552 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	JM	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	VARIABLE 10:1		
Outline Drawing	SS620313	Connection Drawing	EE7308K

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

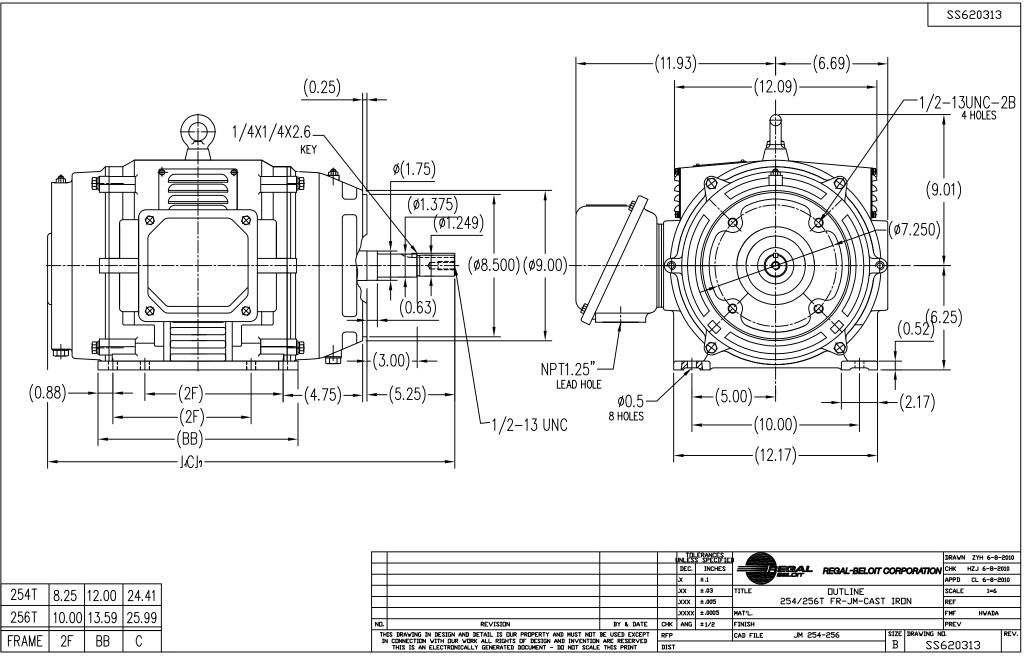

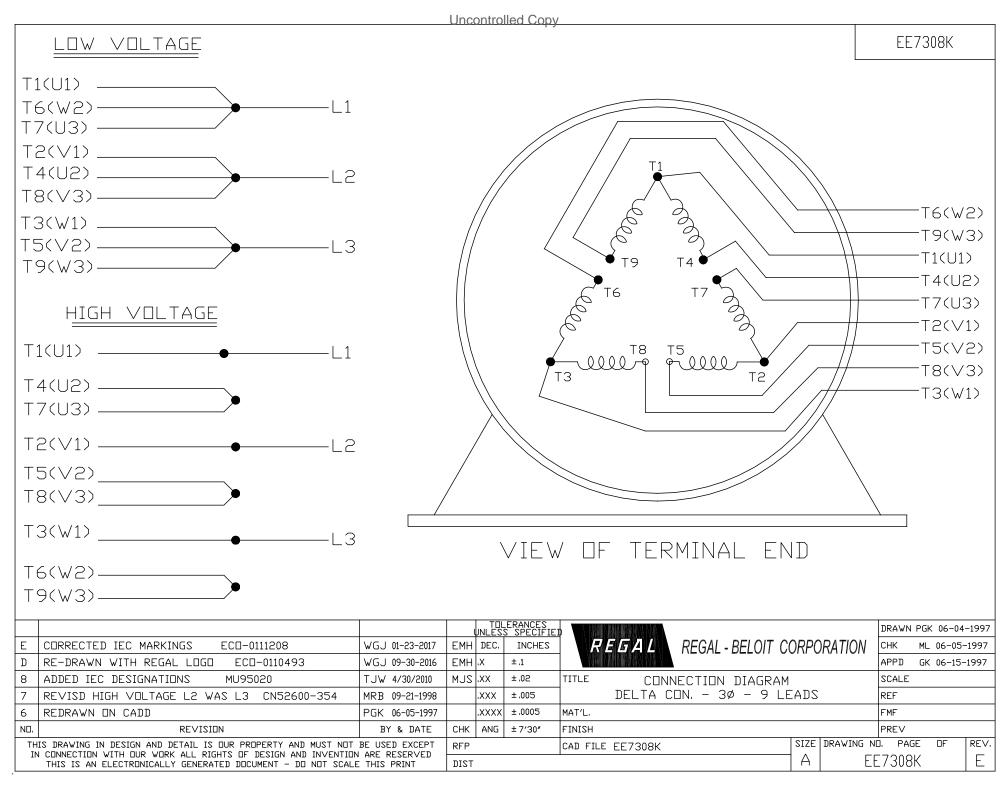



CERTIFICATION DATA SHEET

1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CONN. DIAGRAM: EE7308K **CATALOG #:** 199965.00

OUTLINE: SS620313 **MOUNTING:** F1/F2 CAPABLE

WINDING #: CHT25420003 1

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
20&15	14.9&11.2	3600	3540&2945	254JM	DP	G	В

РН	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	амв°С
3	60/50	230/460&190/380	45/22.5&41/20.5	LINE OR INVERTER	CONTINUOUS	F3	1.15/1.0	40

FULL LOAD EFF:	91.7&91.7	3/4 LOAD EFF:	91.7	1/2 LOAD EFF:	91.7	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	89.5&89	3/4 LOAD PF:	87	1/2 LOAD PF:	80	90.2	SQ CAGE INV RATED

F.L. TORQUE	F.L. TORQUE LOCKED ROTOR AMPS		L.R. TORQUE			B.D. TOR	F.L. RISE°C	
29.8 LB-FT	302 / 151	51	LB-FT	171 %	82	LB-FT	275 %	35

	SOUND PRES @ 3 FT.		SOUNE	POWER	ROTOR WK^2		MAX, WK^2		SAFE STALL TIME		STARTS / HOUR	APPROX. MOTOR WGT	
Ī	75 dB	A	85	dBA	1.3	LB-FT^2	-	LB-FT^2	15	SEC.	3	300	LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEAR	RINGS	GREASE	SHAFT TYPE	SPECIAL DE	SDECTAL ODE	SPECIAL ODE SHAFT		
DE	ODE	GREASE	SHAFITIPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	DOLVDEV EM	JM	NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON	
6209	6208	POLYREX EM	ا الا	INOINE	NONE	1045 NOT ROLLED (C-204)	CASTIRON	

	THERMO-PROTE	CTORS	THEDMISTORS	CONTROL	CDACE HEATEDS		
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS	

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE	
ENCODER: NONE	
NONE NONE PPR	
BRAKE: NONE NONE	
NONE P/N NONE NONE NONE	
FT-LB NONE V NONE Hz	

