PRODUCT INFORMATION PACKET



Model No: 199966.00 Catalog No: 199966.00 Obsolete, replaced by B199966.00 -.20..1800.256JM.OPEN.230/460V.3.60/50HZ.CONT.40C..RIGID C-FACE.....



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 199966.00, Catalog No:199966.00 Obsolete, replaced by B199966.00 - .20..1800.256JM.OPEN.230/460V.3.60/50HZ.CONT.40C..RIGID C-FACE.....




Nameplate Specifications

Phase	3	Output HP	20 & 15 Hp
Output KW	14.9 & 11.2 kW	Voltage	230/460 & 190/380 V
Speed	1773 & 1475 rpm	Service Factor	1.15 & 1.0
Frame	256JM	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	93 & 92.4 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	48/24 & 44/22.1 A	Power Factor	82
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6208
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter	
Poles	4	Rotation	Reversible	
Resistance Main	.455 Ohms	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Cast Iron	
Shaft Type	ЈМ	Assembly/Box Mounting	F1/F2 CAPABLE	
Inverter Load	VARIABLE 10:1			
Outline Drawing	SS620313	Connection Drawing	EE7308K	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

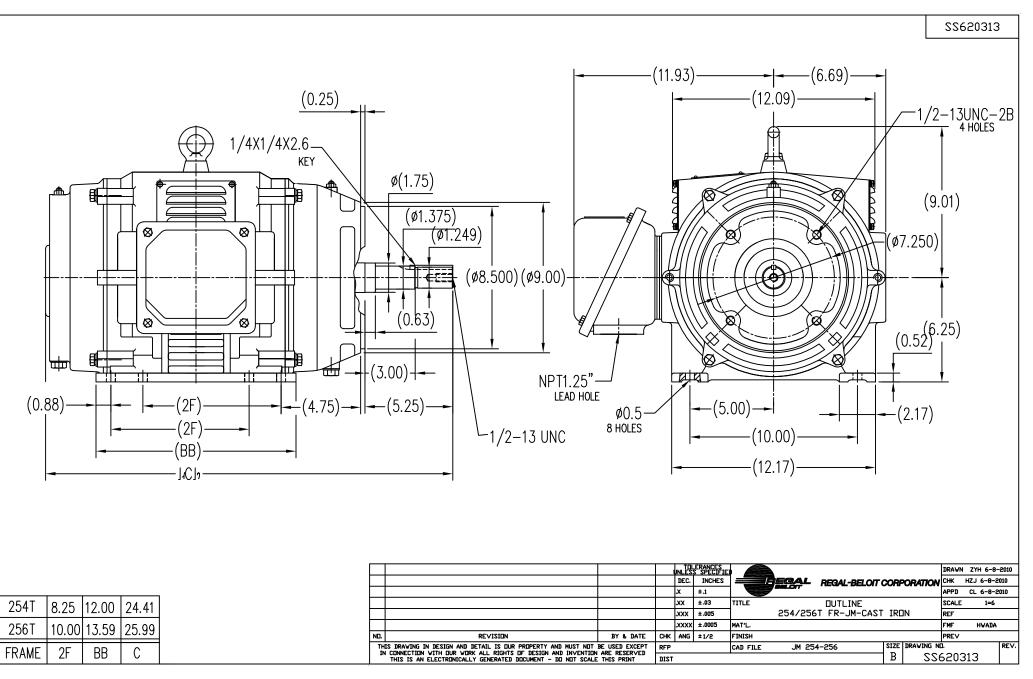

		Unco	ontroll	ed Copy					
LOW VOLTAGE								EE	7308K
T1(U1) T6(W2) T7(U3)									
T2(V1) T4(U2) T8(V3)	<u>)</u>								
T3(W1) T5(V2) T9(W3)	3			_		• T9 T4 •			-T6(W2) -T9(W3) -T1(U1) -T4(U2)
HIGH VOLTAGE T1(U1)L1				/	C C	Jon Star			-T7(U3) -T2(V1) -T5(V2)
T4(U2) T7(U3)									-T8(∨3) -T3(W1)
T2(V1)La) -	/			~				
T5(V2) T8(V3)	/								
T3(W1)L3	}			/IEW	/ 🗆 F	TERMINAL	END		
T6(W2)									
		l	TOLE UNLESS	ERANCES SPECIFIEI		ANN NIKA NA		DRAWN	PGK 06-04-1997
E CORRECTED IEC MARKINGS ECO-0111208	WGJ 01-23-2017	EMH		INCHES	R	EGAL REGAL - BELO	OIT CORPORATION	СНК	ML 06-05-1997
D RE-DRAWN WITH REGAL LOGO ECO-0110493 8 ADDED IEC DESIGNATIONS MU95020	WGJ 09-30-2016 TJW 4/30/2010	EMH MJS		±.1 ±.02	TITLE		CDAM	APPD SCALE	GK 06-15-1997
8 ADDED IEC DESIGNATIONS MU95020 7 REVISD HIGH VOLTAGE L2 WAS L3 CN52600-354	MRB 09-21-1998			±.02		CONNECTION DIA DELTA CON, - 30 -		REF	
6 REDRAWN ON CADD	PGK 06-05-1997			±.0005	MAT'L.			FMF	
ND. REVISION	BY & DATE	СНК		±7′30″	FINISH			PREV	
THIS DRAWING IN DESIGN AND DETAIL IS DUR PROPERTY AND MUST NO		RFP	· · · · ·		CAD FILE	EE7308K	SIZE DRAWING		
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCAL		DIST					A E	E7308	K E



1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CONN. DIAGRAM: EE7308K

CATALOG #: 199966.00

OUTLINE: SS620313

WINDING #: CHT25640006 1

MOUNTING: F1/F2 CAPABLE

TYPICAL MOTOR PERFORMANCE DATA

НР	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN	
20&15	14.9&11.2	1800	1773&1475	256JM	DP	G	В	

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
3	60/50	230/460&190/380	48/24&44/22.1	LINE OR INVERTER	CONTINUOUS	F3	1.15/1.0	40

FULL LOAD EFF:	93&92.4	3/4 LOAD EFF:	93	1/2 LOAD EFF:	91.7	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	82&81.5	3/4 LOAD PF:	77.5	1/2 LOAD PF:	67	92.4	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
59.2 LB-FT	280 / 140	120 LB-FT 202 %	165 LB-FT 278 %	45

SOUND P @ 3		SOUND POWER		ROTOR WK^2		MAX, WK^2		SAFE STALL TIME		STARTS / HOUR	APPROX. MOTOR WGT	
74	dBA	84	dBA	3	LB-FT^2	125	LB-FT^2	20	SEC.	2	325	LBS.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL		154	NONE	NONE			
6309	D9 6208 POLYREX EM JM		١٩١	NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON	

	THERMO-PROTE	CTORS		TUEDNICTORC	CONTROL	SPACE HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	- THERMISTORS	CONTROL	SPACE	HEATERS
NONE	NOT	NONE	NONE	NONE	FALSE	NONE	VOLTS
*				INVERTER TORQUE: INV. HP SPEED RANG		10:1	
Ν				ENCODER: NONE			
0				NONE NONE NONE	PPR		
т				BRAKE: NONE	NONE		
_				NONE P/N NO	NE		
E				NONE NONE			
S				FT-LB NONE	V NONE	Hz	

Uncontrolled Copy

