PRODUCT INFORMATION PACKET



Model No: 199993.00 Catalog No: 199993.00

Obsolete Replaced by B199993.00..30..1800.286JP.ODP.230/460.3.60/50HZ.CONT.40C..RIGID C-FACE......

.....








Nameplate Specifications

Phase	3	Output HP	30 & 25 Hp
Output KW	22.4 & 18.7 kW	Voltage	230/460 & 190/380 V
Speed	1775 & 1480 rpm	Service Factor	1.15 & 1.15
Frame	286JP	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	94.1 & 93.6 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	74/37 & 74/37 A	Power Factor	81
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	F
Drive End Bearing Size	6311	Opp Drive End Bearing Size	6210
UL	Recognized	CSA	Υ
CE	Υ	IP Code	12
Number of Speeds	1		


Technical Specifications


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.255 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	JP	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	CONSTANT 4:1		
Outline Drawing	SS620573	Connection Drawing	EE7308AA-LE

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

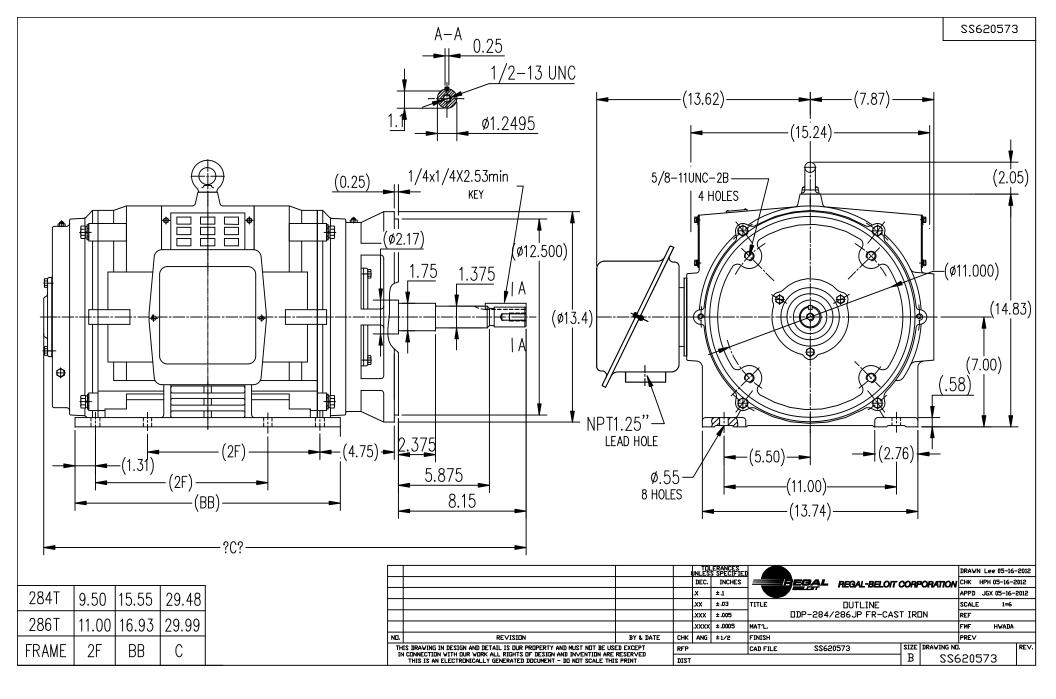

Uncontrolled Copy

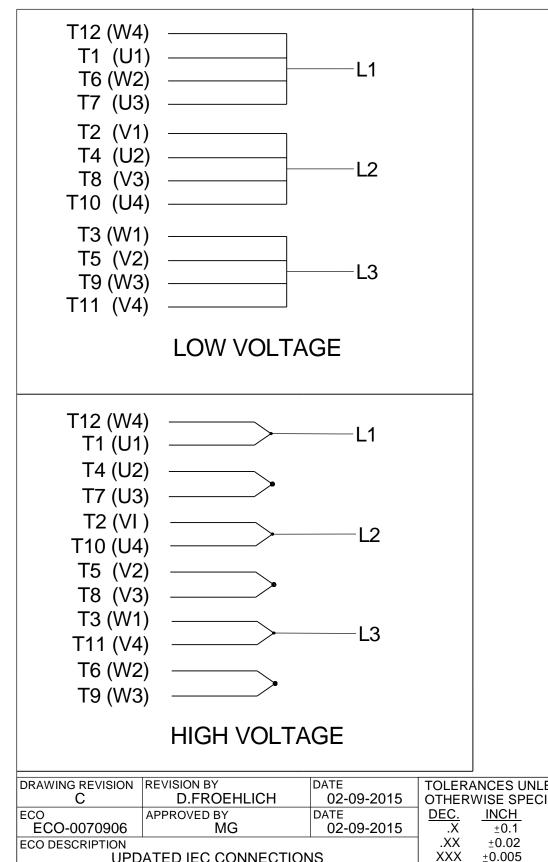

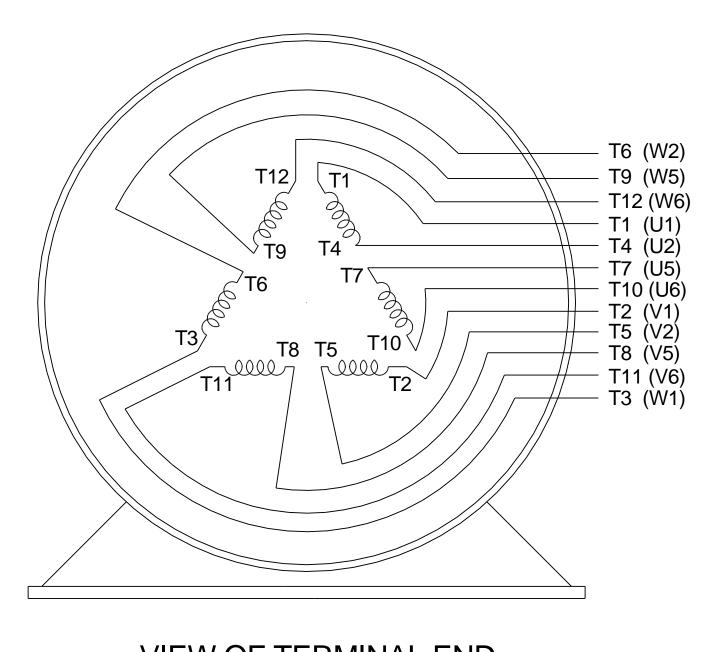

VIEW OF TERMINAL END

DRAWING REVISION C	REVISION BY D.FROEHLICH	DATE 02-09-2015	1	ANCES UN WISE SPE			DRAWN BY HV	TA TA	Pogal Palait Am	orioo Ino	
ECO-0070906	APPROVED BY MG	DATE 02-09-2015	DEC.	<u>INCH</u> ±0.1	mm [±2.5]	ANGLE ±7' 30"	DATE 06-08-20152	REGAL	Regal Beloit Am	ierica, iric.	
ECO DESCRIPTION UPD	ATED IEC CONNECTION	ONS	.XX XXX	±0.02 ±0.005	[±0.51] [±0.127]		APPROVED BY DR	DESCRIPTION	IN DIAGRAM-	EXTERNA	
PROPRIETARY AND CONFI	EGAL BELOIT AMERICA, INC. ALL RIGH DENTIAL INFORMATION - THIS DOCUM CA, INC. ("OWNER") AND CONTAINS OV	ENT IS THE PROPERTY OF		±0.0005 /E BURRS		SHARP	DATE 06-11-2012		3 PHASE - 2/1 DELTA		
INFORMATION. ANY PERS BY RECEIVING IT, TO AGRI	SON, CORPORATION OR OTHER FIRM F EE THAT IT, AND/OR ANY PART OF IT, S	RECEIVING IT IS DEEMED, SHALL NOT BE DISCLOSED	CORNE	6: .003/.015 ER FILLETS	6: .02 [.51]	-	REFERENCE	MATERIAL		PROCESS/FINISH	
AS EXPRESSLY APPROVE BE RETURNED TO C	RATION OR OTHER ENTITY, DUPLICATE ED IN WRITING IN ADVANCE BY OWNER DWNER UPON REQUEST. IT MAY BE SU R APPLICABLE EXPORT CONTROL LAW	R. THIS DOCUMENT SHALL UBJECT TO CERTAIN		NED SURF. OWN IN [B	INCH \setminus	$/$ mm \vee	THIRD ANGLE PROJECTION	SIZE DRAWING N	EE7308AA-		SHEET 1 OF 1



CERTIFICATION DATA SHEET

1051 CHEYENNE AVE. GRAFTON, WI 53024 PH. 262-377-8810

CONN. DIAGRAM: EE7308AA-LE

CATALOG #: 199993.00

OUTLINE: SS620573

MOUNTING: F1/F2 CAPABLE

WINDING #: CHT28640004 1

TYPICAL MOTOR PERFORMANCE DATA

НР	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
30&25	22.4&18.7	1800	1775&1480	286JP	DP	F	В

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	амв°С
3	60/50	230/460&190/380	74/37&74/37	Y START D RUN OR INV	CONTINUOUS	F3	1.15/1.15	40

FULL LOAD EFF:	94.1&93.6	3/4 LOAD EFF:	94.1	1/2 LOAD EFF:	93.6	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	81&82.5	3/4 LOAD PF:	77	1/2 LOAD PF:	67	93.6	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS		L _i R _i TORQUE			B.D. TORC	QUE	F.L. RISE°C
88.5 LB-FT	420 / 210	182	LB-FT	206 %	230	LB-FT	260 %	40

SOUND PF @ 3		SOUND	POWER	ROTO	OR WK^2	мах	. WK^2	SAFE ST	ALL TIME	STARTS / HOUR	APP MOTO	
75	dBA	85	dBA	4.8	LB-FT^2	175	LB-FT^2	20	SEC.	2	425	LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE - LEESON (ENAMEL)

BEAR	RINGS	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	POLYREX EM	JР	NONE	NONE	1045 HOT DOLLED (C 204)	CAST IRON	
6311	6210	IFOLTNEX EIVI	JP	NONE	NONE	1045 HOT ROLLED (C-204)	CASTIRON	

	THERMO-PROTE	CTORS	THERMISTORS	CONTROL	CDACE	IEATEDC	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE	HEATERS
NONE	NOT	NONE	NONE	NONE	FALSE	NONE	VOLTS

	INVERTER TORQUE: CONSTANT 4:1 INV. HP SPEED RANGE: NONE
N	ENCODER: NONE
	NONE NONE PPR
r	BRAKE: NONE NONE
≣	NONE P/N NONE NONE NONE
3	NONE FT-LB NONE V NONE Hz



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 199993.00

(Model No. may contain prefix and/or suffix characters)

Catalog No : 199993.00

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

<u>Authorized Representative in the Community:</u>

J. cers

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

(€ 22