PRODUCT INFORMATION PACKET



Model No: 213THTS18573 Catalog No: 213THTS18573 7 1/2,1800,TENV,213TZ,3/60/460






Nameplate Specifications

3	Output HP	7.50 Hp
5.6 kW	Voltage	460 V
1775 rpm	Service Factor	1
213TCZ	Enclosure	Totally Enclosed Non Ventilated
Thermostat	Efficiency	90.2 %
-40 °C	Frequency	60 Hz
10.5 A	Power Factor	75
60 Minute	Insulation Class	Н
INV	KVA Code	L
6309	Opp Drive End Bearing Size	6207
Recognized	CSA	Υ
Υ	IP Code	56
1		
	5.6 kW 1775 rpm 213TCZ Thermostat -40 °C 10.5 A 60 Minute INV 6309 Recognized	5.6 kW Voltage 1775 rpm Service Factor 213TCZ Enclosure Thermostat Efficiency -40 °C Frequency 10.5 A Power Factor 60 Minute Insulation Class INV KVA Code 6309 Opp Drive End Bearing Size Recognized CSA

Technical Specifications


Electrical Type	Squirrel Cage Inverter Duty	Starting Method	Inverter Only	
Poles	4	Rotation	Reversible	
Resistance Main	3.25 Ohms	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Cast Iron	
Shaft Type	Special Extension Both Sides	Assembly/Box Mounting	F1/F2 CAPABLE	
Outline Drawing	SS89737-875	Connection Drawing	A-EE7300AK	


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:08/24/2023

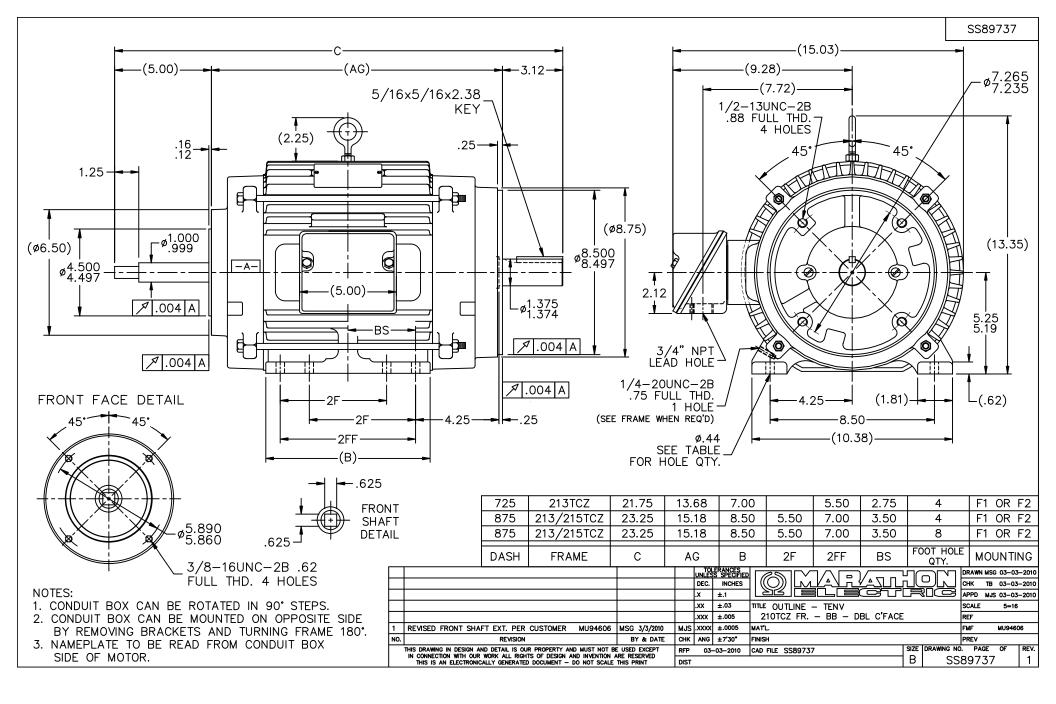

TO REVERSE ROTATION: INTERCHANGE ANY TWO LINE LEAD CONNECTIONS.

P1 AND P2 PROTECTORS TO VOLTAGE CONTROL

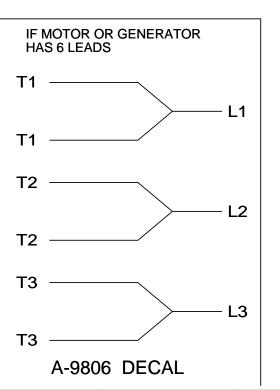

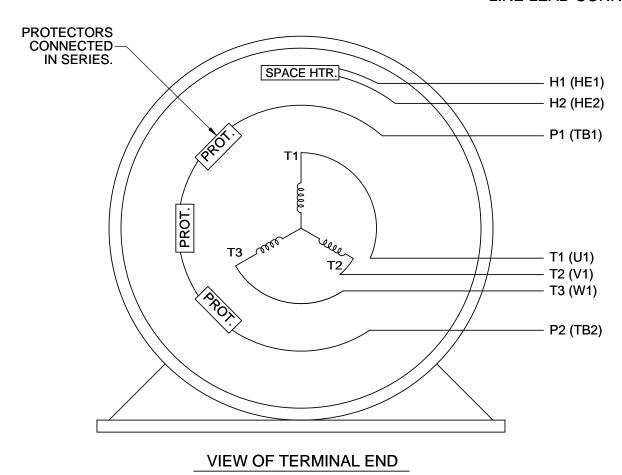

DRAWING REVISION	REVISION BY J. OTTO	DATE 04 12 2017	
J	3.0110	04-13-2017	
ECO	APPROVED BY	DATE	
ECO-0121568	T. VUE	04-18-2017	
ECO DESCRIPTION			

ADDED IEC NOTATIONS

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.

PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLERA			
OTHERW	/ISE SPE	CIFIED:	
DEC.	INCH	mm	ANGLE
X	±0.1	[±2.5]	±7' 30"
.XX	± 0.02	[±0.51]	
XXX	±0.005	[±0.127]	
.XXXX. ±	0.0005	[±0.0127]	
REMOVE	BURRS	& BREAK S	HARP
EDGES:	.003/.015	5 [.076/.381]	
CORNER	FILLETS	S: .02 [.51]	
MACHINE	D SURF	ACES: 200)/ 5.1/
		INCH V	$mm \bigvee$
mm SHO	WN IN [E	BRACKETS1	

Ę	DRAWN BY MJD DATE 06-24-2014		REGAL	Regal Beloit Ame	rica, Inc.	
	APPROVED BY TB DATE 07-06-1998	DES	DESCRIPTION CONN DIAGRAM-INTERNAL SINGLE VOLT-3Ø MOTOR			•
,	REFERENCE		ERIAL		PROCESS/FINISH	
/	THIRD ANGLE PROJECTION	SIZE A	DRAWING N	EE7300AK		SHEET 1 OF 1