

PRODUCT INFORMATION PACKET

Model No: 213TPFRB10230

Catalog No: SY068

SyMAX® Fan & Blower Motor, 7.50 HP, 3 Ph, 90 Hz, 230/460 V, 1800 RPM, 213TC Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.


©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E

Nameplate Specifications

Phase	3	Output HP	7.50 Hp
Output KW	5.6 kW	Voltage	230/460 V
Speed	1800 rpm	Service Factor	1
Frame	213TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	Thermostat	Efficiency	94.1 %
Ambient Temperature	40 °C	Frequency	90 Hz
Current	16.6/8.3 A	Power Factor	88
Duty	Continuous	Insulation Class	F
Design Code	No Design Code	KVA Code	N/A
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Y
CE	N	IP Code	43
Number of Speeds	1		

Technical Specifications

Electrical Type	AC Permanent Magnet	Starting Method	Inverter Only
Poles	6	Rotation	Reversible
Resistance Main	1.34 Ohms	Mounting	Bolt-on Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	T	Overall Length	19.47 in
Frame Length	9.65 in	Shaft Diameter	1.375 in
Shaft Extension	3.12 in	Assembly/Box Mounting	F1 ONLY
Inverter Load	CONSTANT 20:1		
Connection Drawing	EE7308T	Outline Drawing	036394-965

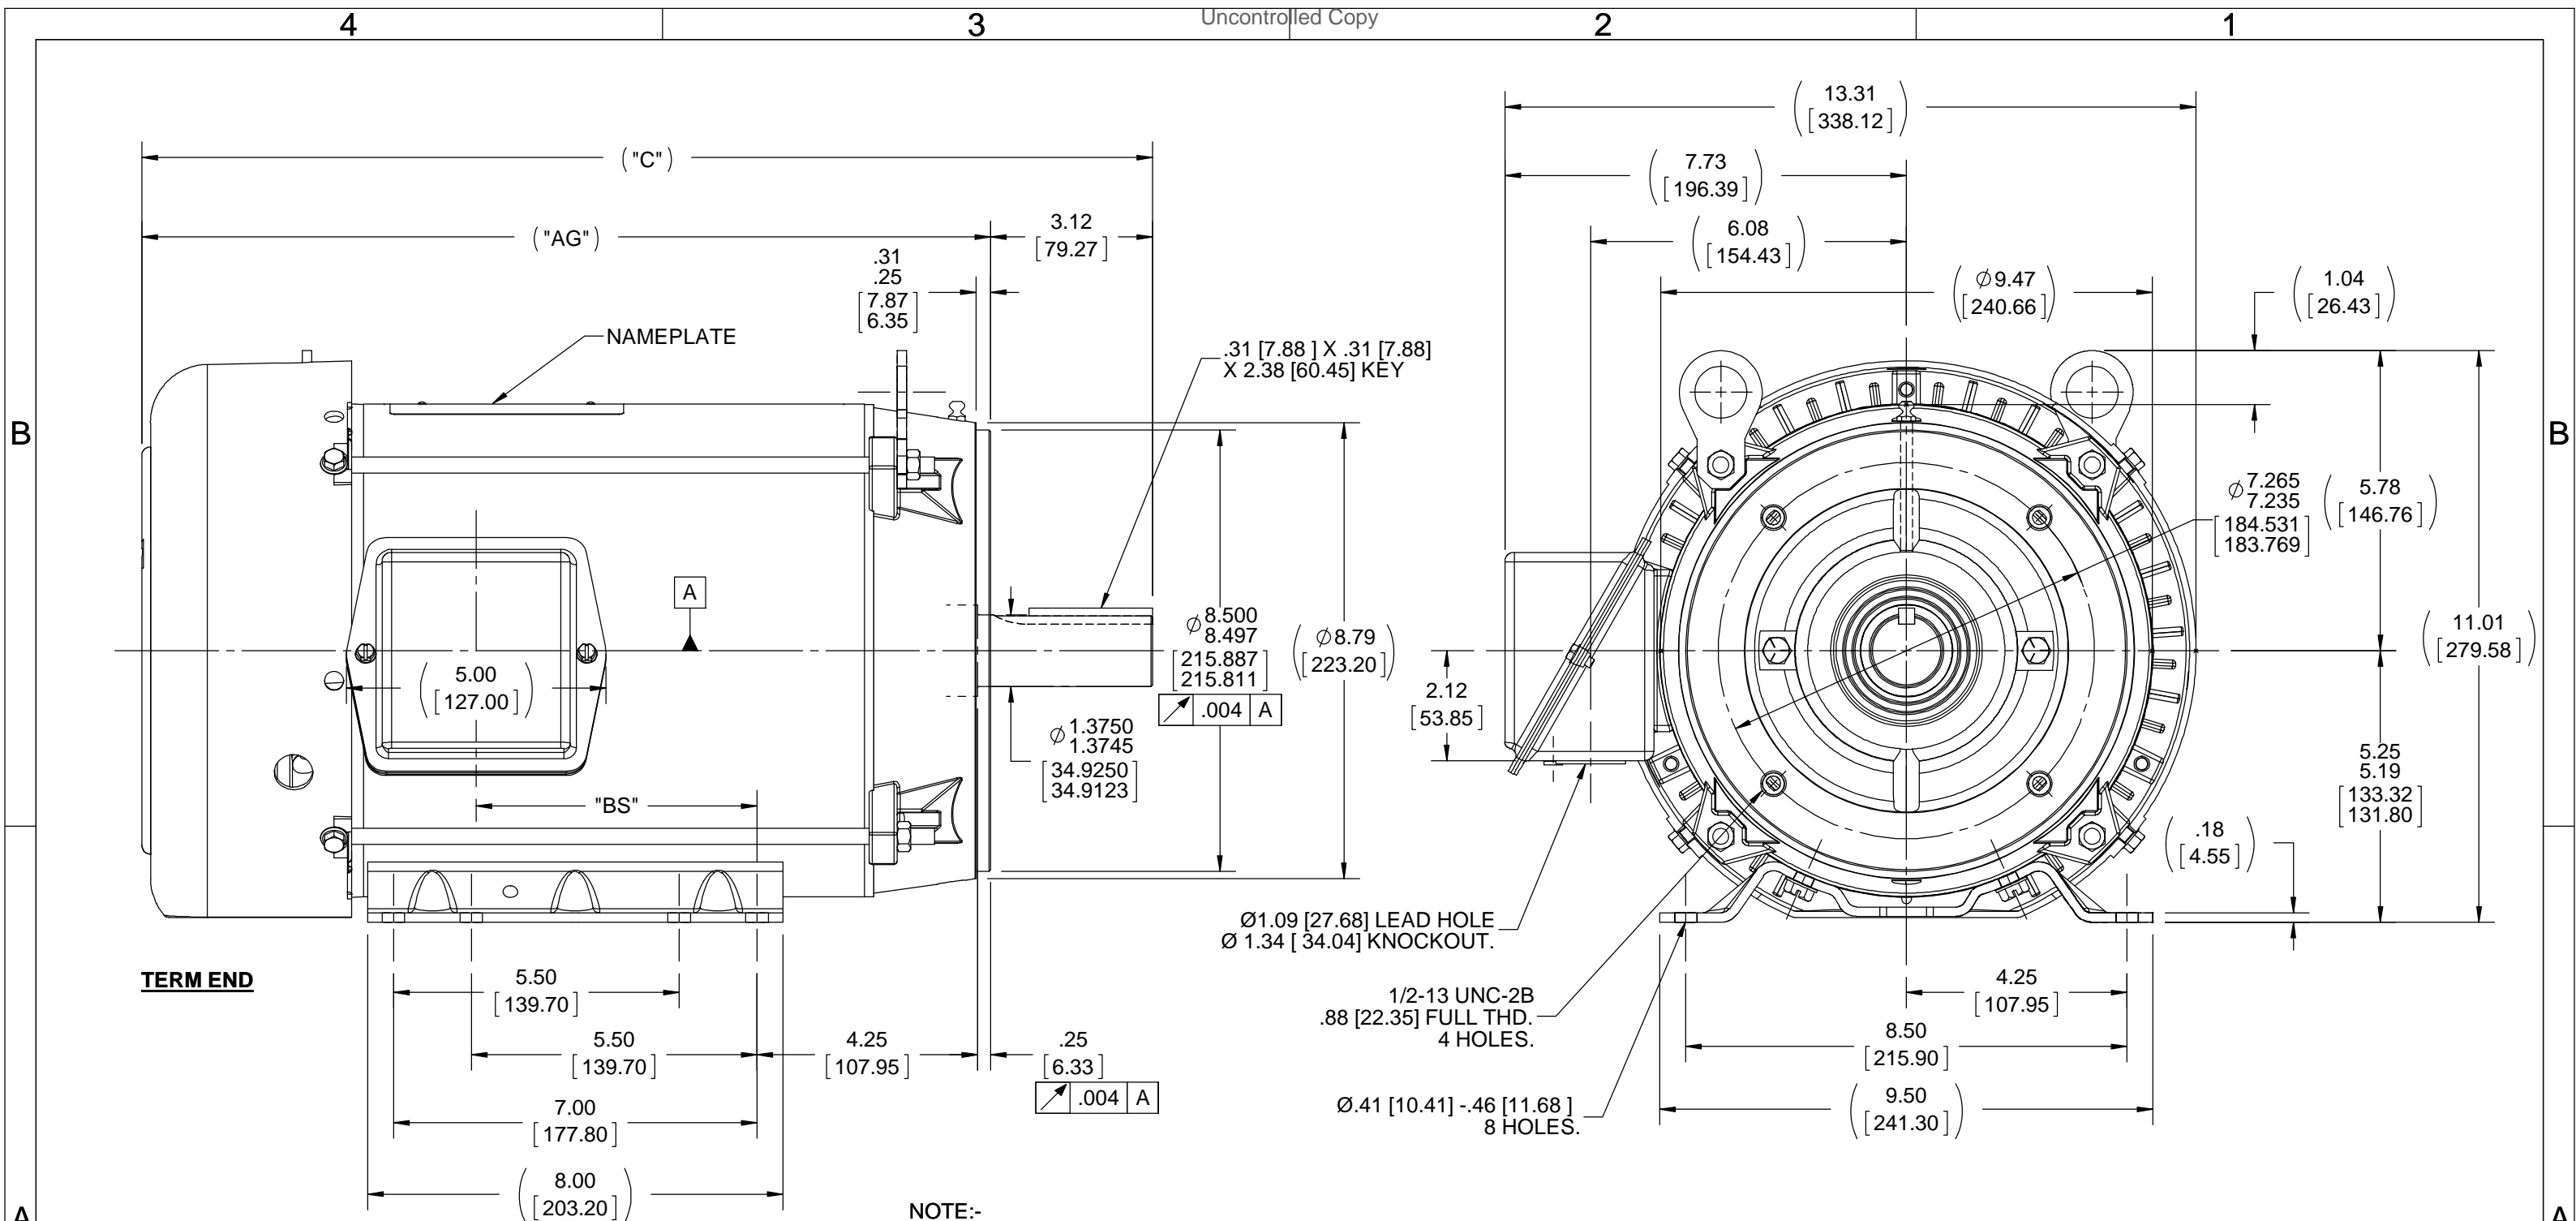

NOTE:-

- 1) NAMEPLATE TO BE READ FROM C"BOX SIDE OF MOTOR.
- 2) BOX CAN BE MOUNTED IN 90° STEPS.
- 3) BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKET AND TURNING FRAME 180°.
(EXCEPT AS NOTE).
- 4) (NOT FIELD MODIFIABLE ON PMAC)

DRAWING REVISION A	REVISION BY	DATE
ECO ECO-0144874	APPROVED BY	DATE
ECO DESCRIPTION OUTLINE CONVERSION PROJECT COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.		

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
DEC.	INCH	mm	ANGLE
.X	±0.1	[±2.5]	±7° 30"
.XX	±0.03	[±0.76]	
.XXX	±0.005	[±0.127]	
.XXXX	±0.0005	[±0.0127]	
REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [0.076/.381] X 45° CORNER FILLETS: R.02 [0.51] MACHINED SURFACES: 200 INCH/mm 5.1 mm SHOWN IN [BRACKETS]			

DRAWN BY A.SUPPANAVAR
DATE 05/07/2018
APPROVED BY ST
DATE 05/14/2018
REFERENCE 036254
THIRD ANGLE PROJECTION

REGAL ™ Regal Beloit America, Inc.	
DESCRIPTION OUTLINE 210T FR.-BB-TS-TEFC-R/S-C' FACE	
MATERIAL	PROCESS/FINISH
SIZE B	DRAWING NUMBER 036394
	SHEET 1 OF 1

DASH	FR.	"C"	"AG"	"BS"
965	213T	19.47 [494.54]	16.35 [415.29]	5.41 [137.41]

HIGH VOLTAGE




**THREE PHASE
DUAL VOLTAGE MOTOR**

THERMO-PROTECTORS
CONNECTED IN SERIES



NOTE FOR FACTORY USE ONLY:
TO SURGE TEST FOR COMMON CONNECT:
HIGH VOLT: CONNECT P1 TO T1
THEN P2 TO L1
LOW VOLT: CONNECT P1 TO T1 & T7,
THEN P2 TO L1

LOW VOLTAGE

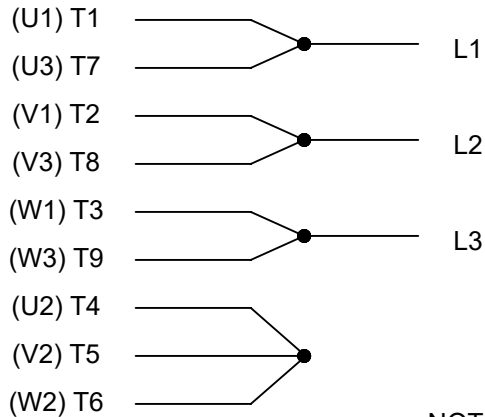

VIEW OF TERMINAL END

NOTE: LEAD'S COLOR CAN BE YELLOW OR WHITE FOR MT2 PLANT

DRAWING REVISION T	REVISION BY ZR	DATE 01-14-2019		DRAWN BY SMC	Regal Beloit America, Inc.	
ECO ECO-0159915	APPROVED BY DR	DATE 01-15-2019		DATE 05-13-1992		
ECO DESCRIPTION ADDED TERMINAL CONNECTION DIAGRAM				APPROVED BY TB	DESCRIPTION CONN DIAGRAM-INTERNAL 3 PHASE - DUAL VOLTAGE MOTOR	
<small>COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.</small>				DATE 05-13-1992	MATERIAL	PROCESS/FINISH
			REFERENCE EE7308/EE7300	SIZE A	DRAWING NUMBER EE7308T	SHEET 1 OF 1
			THIRD ANGLE PROJECTION			

CERTIFICATION DATA SHEET

Model#: 213TPFRB10230 AA **WINDING#:** PM21506025 NONE 2
CONN. DIAGRAM: EE7308T **ASSEMBLY:** F1 ONLY
OUTLINE: 036254-965

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
7 1/2	5.6	1800	1800	213TC	TEFC	NO KVA CODE	PM

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	90	230/460	17.2/8.6	INVERTER ONLY	CONTINUOUS	F1	1.0	40	3300

FULL LOAD EFF: 93.8	3/4 LOAD EFF: -	1/2 LOAD EFF: -	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 86.3	3/4 LOAD PF: -	1/2 LOAD PF: -	92.4	AC PERMANENT MAGNET	.8 / .4

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
21.88 LB-FT	/	- LB-FT -	- LB-FT -	34

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
0 dBA	10 dBA	0.58 LB-FT^2	0 LB-FT^2	0 SEC.	0	94 LBS.

EQUIVALENT WYE CKT.PARAMETERS (OHMS PER PHASE)

R1	R2	X1	X2	XM
0	0.67	15	28.3	226

RM	ZREF	XR	TD	TD0
0	1	0	0	0

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	BOLT-ON	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLACK (EPOXY)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL
DE	OPE						
BALL	BALL	POLYREX EM	T	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL
6309	6206						

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
TSTATS 140(N/C)	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: CONSTANT 20:1
INV. HP SPEED RANGE: 1.2 X BASE SPEED
ENCODER: NONE
NONE NONE
NONE NONE PPR
BRAKE: NONE NONE

*
N
O
T
E
S
*

NONE	P/N	NONE	
NONE	NONE		
NONE FT-LB		NONE V	NONE Hz

DATE: 06/22/2017 04:15:36 AM
FORM 3531 REV.3 02/07/99
** Subject to change without notice.

Data Sheet





Date: 2/20/2018
 Customer: KENDALL ELECTRIC
 Attention: _____
 Submitted by: STEVE BERNHARDT

Model: 213TPFRB10230
 Catalog: SY068
 Winding: PM21506025
 Submittal Data @ 460 V

Motor Load Data

Load	0%	25%	50%	75%	100%	115%	125%	150%	
Current (Amps)	0.4	2.40	4.20	6.20	8.30	9.40	0.00		
Torque (ft-lb)	0.00	5.47	10.94	16.41	21.88	25.17	0.00	0.00	
Efficiency (%)		88.8	92.5	93.1	93.8	95.3	0.0		

Motor Speed Data

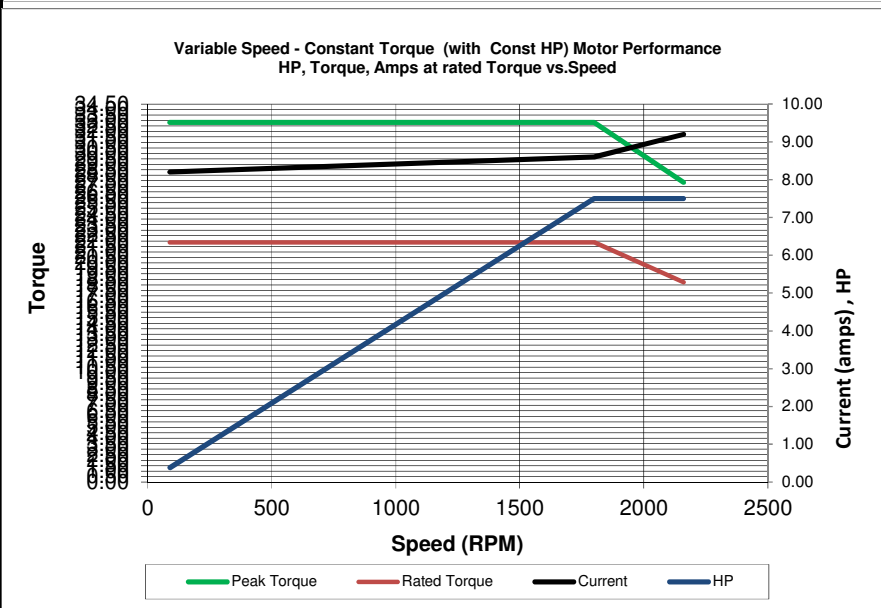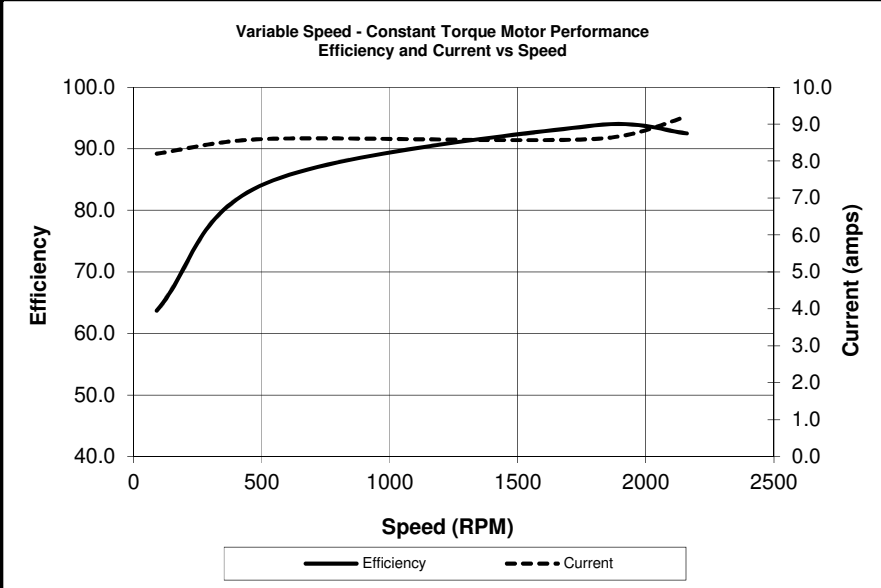

Motor Characteristics			
HP	7.50		
Sync. RPM	1800		
Frame	215		
Enclosure	TEFC		
Construction Type	PFR		
Voltage	460 V		
Frequency	90 Hz		
Motor P.F. (%)	86.3		
Reserve Tq Capability	150 %		
Temp Rise @ FL	34 ° C		
Insulation Class	F		
Duty	CONT		
Ambient	40 ° C		
Elevation	3,300 feet		
Ref Wdg	PM21506025 NONE		
Sound Pressure @ 1m	0 dBA		
Motor Wgt	94 Lb		
Rotor/Shaft wk ²	0.58 Lb-Ft ²		
CT Speed Range	20 :1		
VT Speed Range	2000 :1		
Outline Dwg	614-0004-005		
Conn. Diag	EE7308		
DE Bearing	6205		
ODE Bearing	6203		
Additional Specifications:			
PWM variable frequency electronic drive that is permanent magnet motor capable required for operation. Motor efficiency reflects operation on a VFD.			
R / phase (ohms)	Ld (mH)	Lq (mH)	BEMF (V/krpm)
0.67	15	28.3	226

Constant Torque (Constant Power) Load Points

Hz	RPM	HP	ft-lb	Amps	Eff	Pk Tq
5	90	0.38	21.88	8.20	63.7	32.82
90	1800	7.5	21.88	8.60	93.8	32.82
108	2160	7.5	18.24	9.20	92.5	27.36