PRODUCT INFORMATION PACKET



Model No: 213TTDB6092 Catalog No: GT0511

Globetrotter® Close-Coupled Pump Motor, 3 HP, 3 Ph, 60 Hz, 575 V, 1200 RPM, 213JMV Frame, DP





Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E




Nameplate Specifications

Output HP	3 Hp	Output KW	2.2 kW	
Frequency	60 Hz	Voltage	575 V	
Current	3.5 A	Speed	1182 rpm	
Service Factor	1.15	Phase	3	
Efficiency	88.5 %	Power Factor	72	
Duty	Continuous	Insulation Class	F	
Design Code	В	KVA Code	J	
Frame	213JMV	Enclosure	Drip Proof	
Thermal Protection	No Protection	Ambient Temperature	40 °C	
Drive End Bearing Size	6207	Opp Drive End Bearing Size	6206	
UL	Recognized	CSA	Υ	
CE	Υ	IP Code	22	
Number of Speeds	1			

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	2.605 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal Or Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JM	Overall Length	19.22 in
Shaft Diameter	0.875 in	Shaft Extension	4.25 in
Assembly/Box Mounting	F1/F2 Capable	Inverter Load	VARIABLE 10:1
Outline Drawing	SS620312	Connection Drawing	EE7300

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:11/28/2022

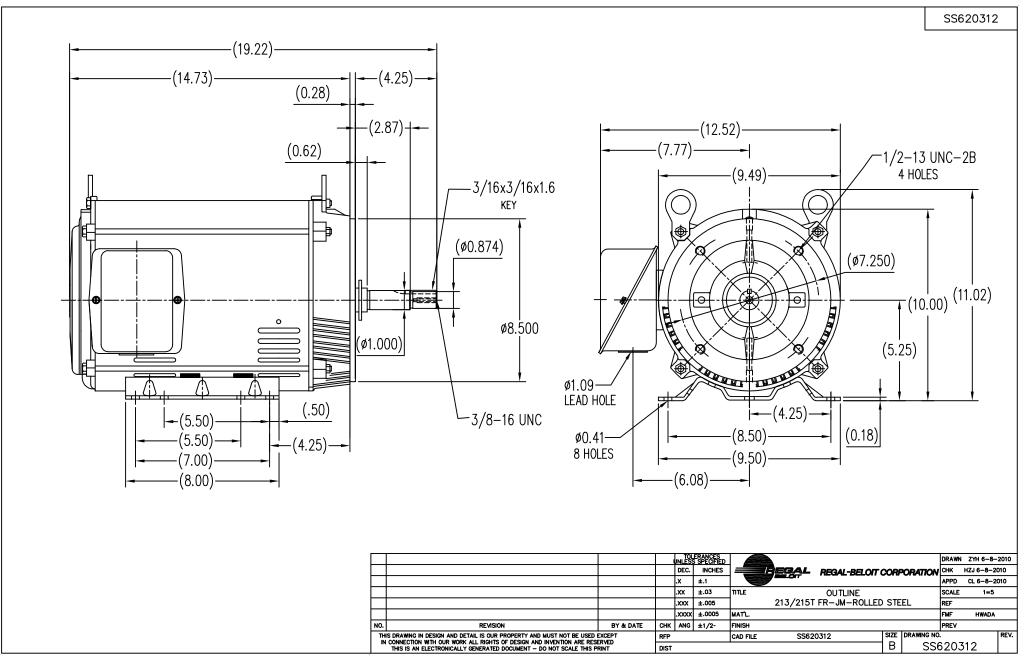



CERTIFICATION DATA SHEET

 Model#:
 213TTDB6092 AA
 WINDING#:
 CHT21360006 NONE 3

 CONN. DIAGRAM:
 EE7300
 ASSEMBLY:
 F1/F2 CAPABLE

OUTLINE: SS620312

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
3	2.24	1200	1182	213JMV	DP	J	В
				1			

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60	575	3.5	LINE OR	CONTINUOU	F7	1.15	40	3300
				INVERTER	S				

FULL LOAD EFF: 88.5	3/4 LOAD EFF: 88.5	1/2 LOAD EFF: 86.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 72	3/4 LOAD PF: 66	1/2 LOAD PF: 54	87.5	SQ CAGE INV RATED	1.9

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
13.4 LB-FT	24	23 LB-FT 172	37 LB-FT 275	40

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
62 dBA	72 dBA	1.1 LB-FT^2	- LB-FT^2	20 SEC.	3	185 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL OR SHAFT	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)
			DOWN					

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	JM	NONE	NONE	1045 HOT	ROLLED STEEL
6207	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE


ENCODER: NONE NONE NONE NONE NONE PPR


BRAKE: NONE NONE NONE P/N NONE NONE NONE

- FT-LB NONE V NONE Hz

*
N
O
T
E
S

DATE: 06/22/2017 04:26:14 AM FORM 3531 REV.3 02/07/99 ** Subject to change without notice.

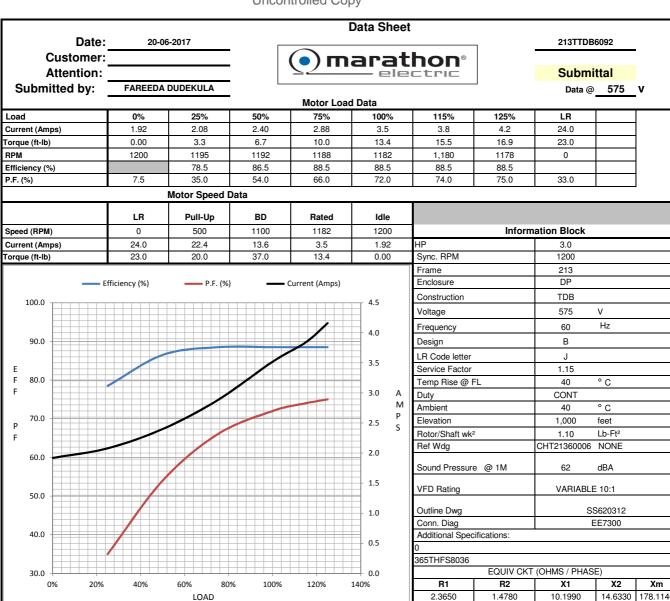

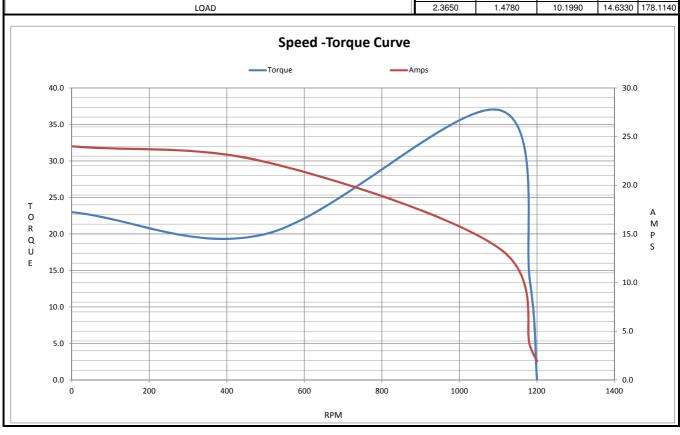



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401

and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 213TTDB6092

(Model No. may contain prefix and/or suffix characters)

Catalog No: GT0511

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Authorized Representative in the Community:

J. cerse

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

C€ 22