# **PRODUCT INFORMATION PACKET**

Model No: 213TTDB6095 Catalog No: GT2511 Close-Coupled Pump Motors, Drip Proof, 3 HP, 3 Ph, 60 Hz, 575 V, 1182 RPM, 213JPV Frame



Regal and are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 213TTDB6095, Catalog No:GT2511 Close-Coupled Pump Motors, Drip Proof, 3 HP, 3 Ph, 60 Hz, 575 V, 1182 RPM, 213JPV Frame


## Nameplate Specifications

Output HP	3 Hp	Output KW	2.2 kW	
Frequency	60 Hz	Voltage	575 V	
Current	3.5 A	Speed	1182 rpm	
Service Factor	1.15	Phase	3	
Efficiency	88.5 %	Power Factor	72	
Duty	Continuous	Insulation Class	F	
Design Code	В	KVA Code	J	
Frame	213JPV	Enclosure	Drip Proof	
Thermal Protection	No Protection	Ambient Temperature	40 °C	
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206	
UL	Recognized	CSA	Y	
CE	Y	IP Code	22	
Number of Speeds	1			

### **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	2.605 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal Or Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JP	Overall Length	23.11 in
Shaft Diameter	1.250 in	Shaft Extension	8.14 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	VARIABLE 10:1
Connection Drawing	EE7300	Outline Drawing	SS620571

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2022

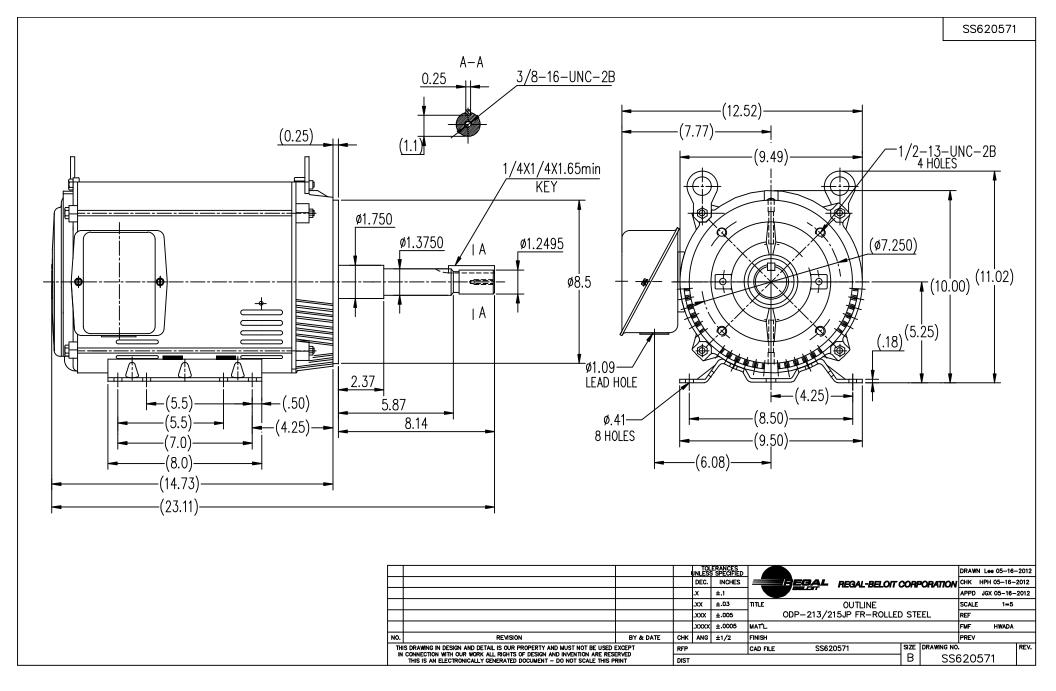



4 of 6

#### **CERTIFICATION DATA SHEET**

Model#:	213TTDB6095 AA	WINDING#:	CHT21360006 NONE 3
CONN. DIAGRAM:	EE7300	ASSEMBLY:	F1/F2 CAPABLE
OUTLINE:	SS620571		

#### TYPICAL MOTOR PERFORMANCE DATA

НР		ĸw		SYNC. R	РМ	F.L. RPM	FRAM	E	ENC	LOSURE	KVA	A CODI	E	DESIGN
3		2.24		1200		1182	213JF	٧		DP	J			В
РН	Hz	z	VOLTS	S FI	AMPS	START TYPE	DUTY		INSL		S.F	AN	∕/B°C	ELEVATION
3	60	)	575		3.5	LINE OR INVERTER	CONTINU	JU	F7		1.15		40	3300
FULL LOAD E			LOAD EF			AD EFF: 86.5	j	D. EFF			-		NO LOAD AMPS	
	ULL LOAD PF: 72 3/4 LOAD PF					JE	7.5	] 	D. TORQU	E INV RAT	ED ]_	F.L. F	1.9 RISE°C	
13.4 L	B-FT			24		23 LB	-FT 172	37 LB-FT 275			40			
SOUND PRESS @ 3 FT.	SURE	SOUNI	D POWER	RO	TOR WK^	2 MAX	. WK^2	SAFI	E STALL	ТІМЕ	START /HOU	-	APP	PROX. MOTOR WGT
62 dBA		72	2 dBA	1.1	1 LB-FT^2	- LB	-FT^2		20 SEC.		3			185 LBS.

#### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL OR SHAFT	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)
			DOWN					

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	JP	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS WDG RTDs BRG RTDs					
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

# If Inverter equals NONE, contact factory for further information

	INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE							
	IV. HP	SPEED R	ANGE: NO	INE				
EI	ENCODER: NONE							
N	ONE	NONE						
N	ONE	NONE PR	PR					
в	RAKE:	NONE	NONE					
N	ONE	P/N	NONE					
N	ONE	NON	E					
N	IONE F	T-LB	NONE	V NO	ONE Hz			

DATE: 06/22/2017 04:50:22 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

- 0
- T E
- s

\*

#### Uncontrolled Copy

