

PRODUCT INFORMATION PACKET







marathon[®]



Product Information Packet: Model No: 213TTDW4001, Catalog No:E706 Other Purpose Motor, 10 & 7.50 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V, 3600 & 3000 RPM, 213T Frame, DP

marathon®


Nameplate Specifications

Phase	3	Output HP	10 & 7.50 Hp
Output KW	7.5 & 5.6 kW	Voltage	208-230/460 & 190/380 V
Speed	3515 & 2910 rpm	Service Factor	1.15 & 1.15
Frame	213T	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	88.5 & 87.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	26-23.4/11.7 & 22/11 A	Power Factor	90
Duty	Continuous	Insulation Class	В
Design Code	В	KVA Code	Н
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	1.1 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	т	Overall Length	17.30 in
Frame Length	11.15 in	Shaft Diameter	1.375 in
Shaft Extension	3.47 in	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	A-SS86500-1115	Connection Drawing	A-EE7308

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

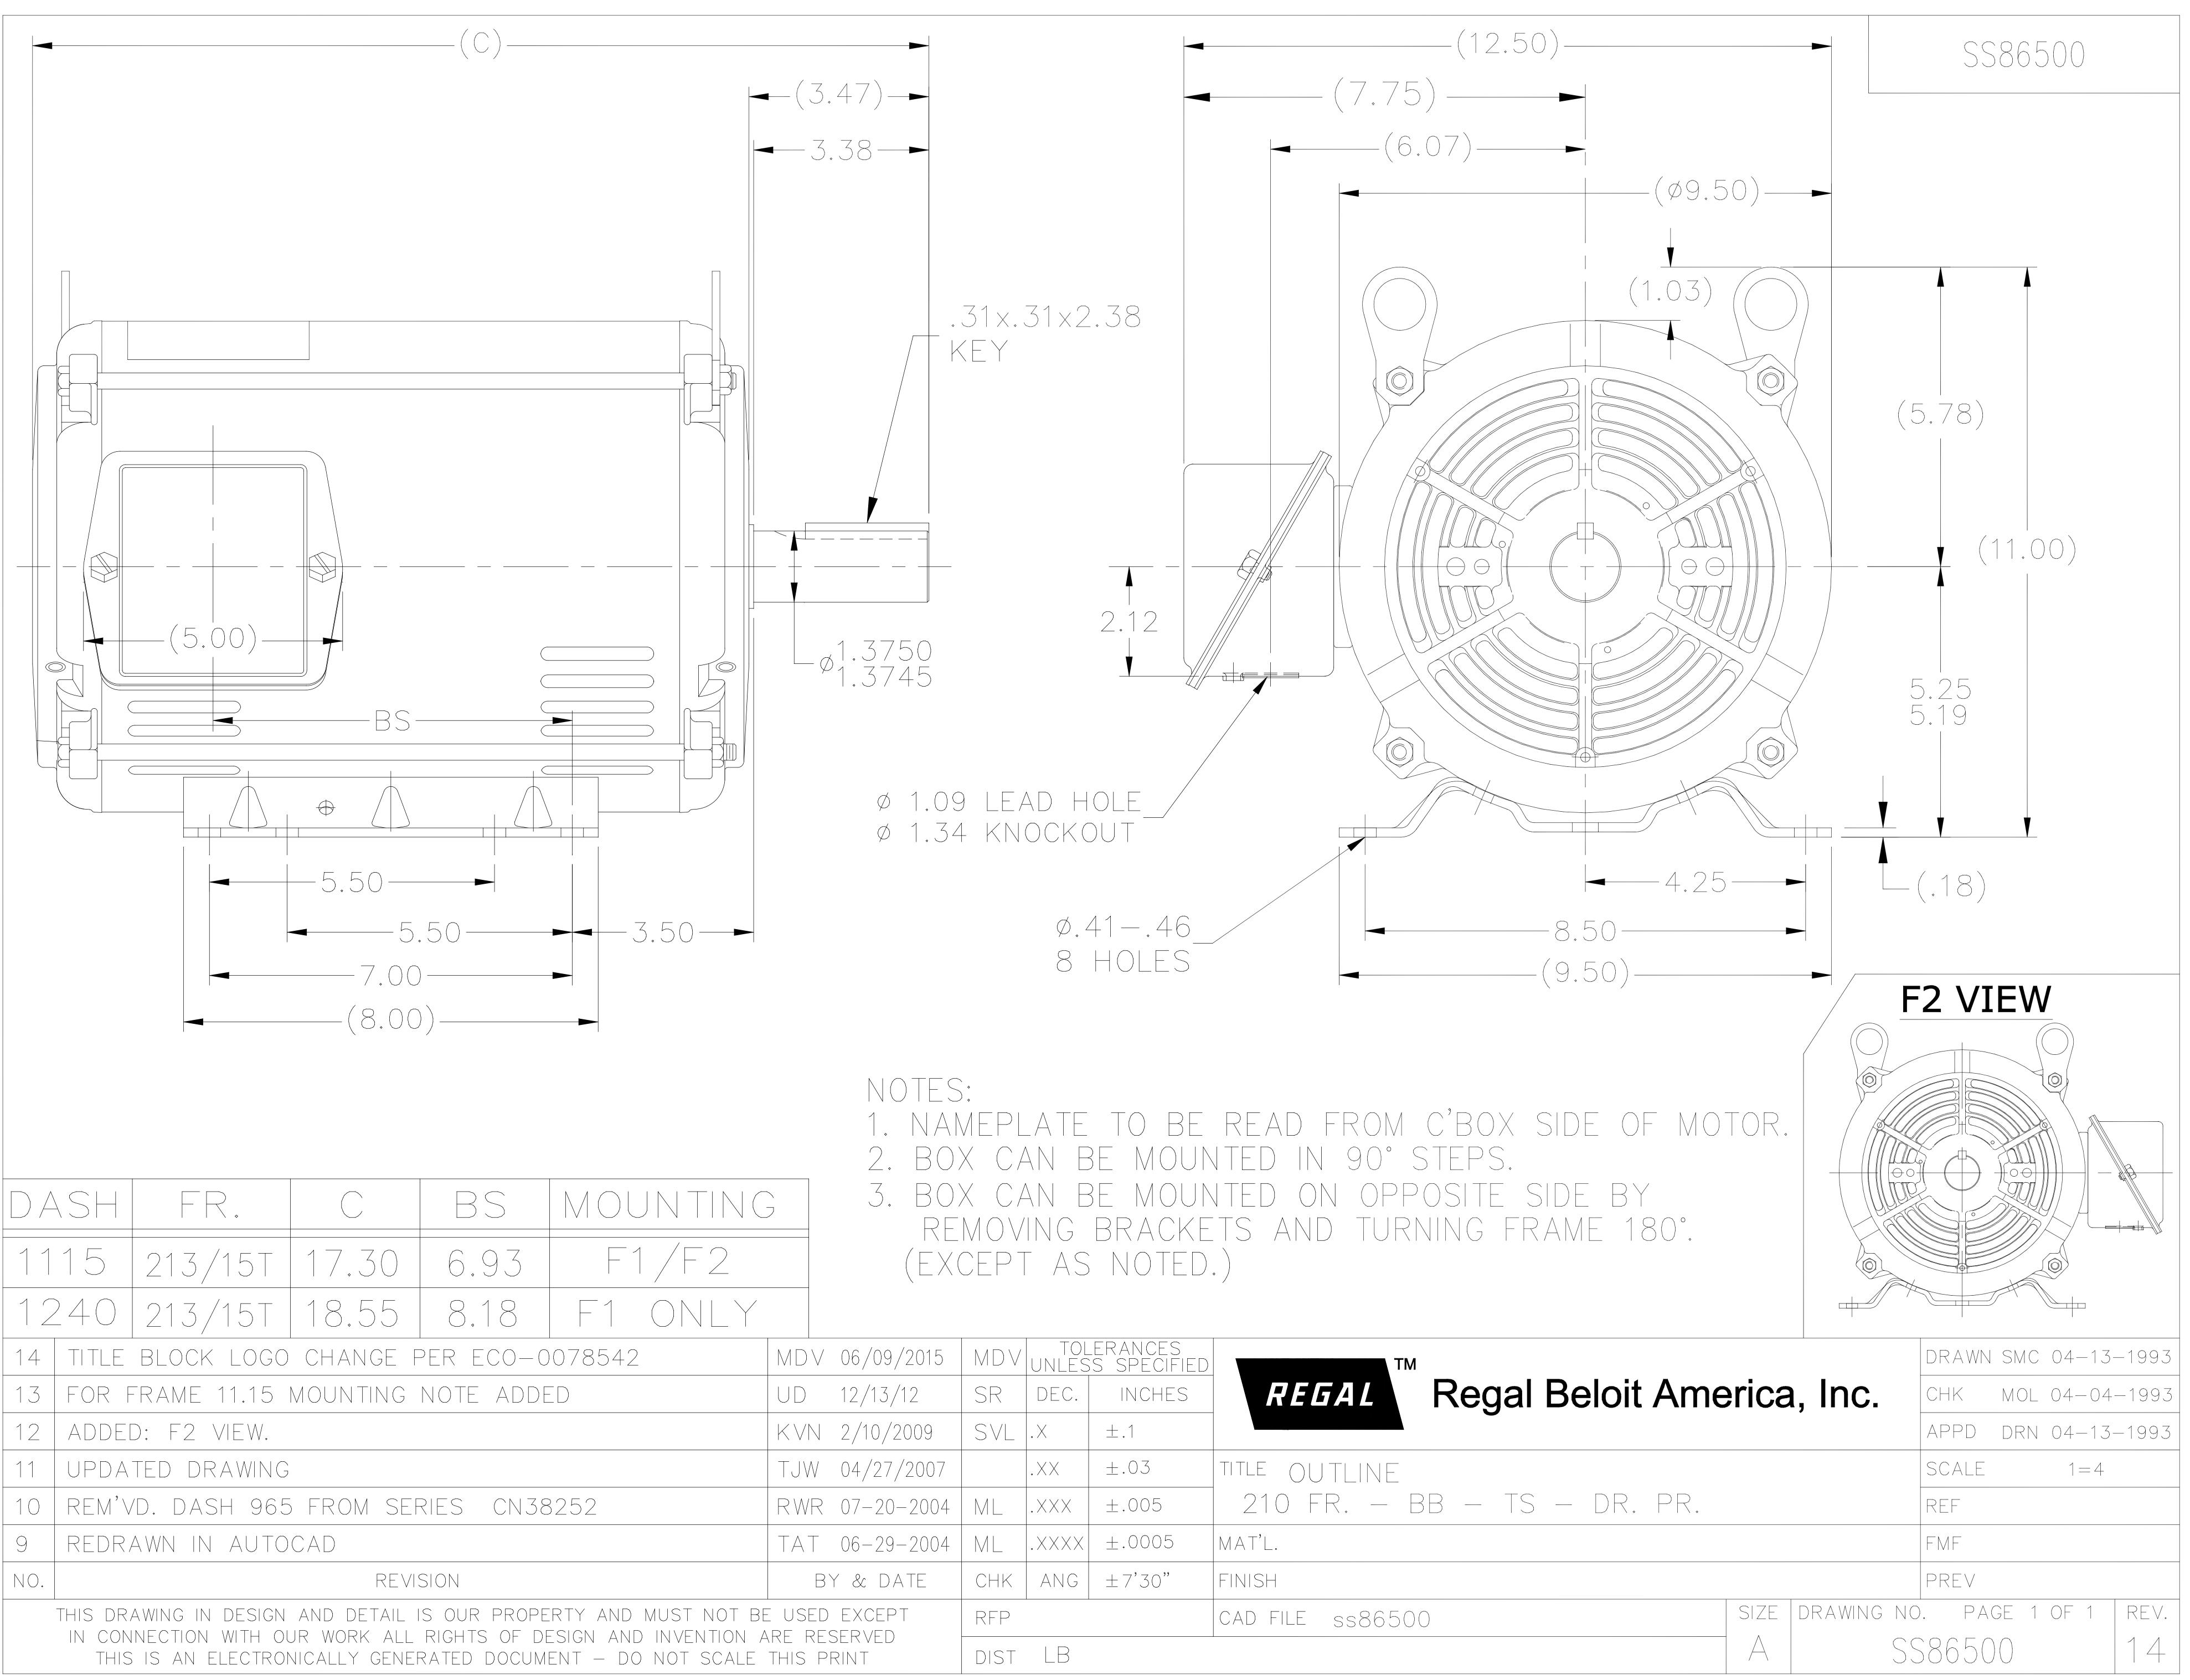

8542	MDV	06/09/2015	MDV		ERANCES S SPECIFIED	
	UD	12/13/12	SR	DEC.	INCHES	
	KVN	2/10/2009	SVL	.×	±.1	
	TJW	04/27/2007		.XX	±.03	TITL
52	RWR	07-20-2004	ML	.XXX	$\pm.005$	\sum
	TAT	06-29-2004	ML	.XXXX	$\pm.0005$	MAT
	B`	y & date	СНК	ANG	±7'30"	FINI
Y AND MUST NOT BE USED EXCEPT On and invention are reserved - do not scale this print		RFP			CAE	
		DIST	LB			

nc.

Uncontrolled Copy

