PRODUCT INFORMATION PACKET

Model No: 213TTFB6031 Catalog No: GT3116 Globetrotter® Close-Coupled Pump Motor, 7.50 & 5 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM, 213JM Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



marathon®



Product Information Packet: Model No: 213TTFB6031, Catalog No:GT3116 Globetrotter® Close-Coupled Pump Motor, 7.50 & 5 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM, 213JM Frame, TEFC

marathon®


Nameplate Specifications

Phase	3	Output HP	7.50 & 5 Hp
Output KW	5.6 & 3.7 kW	Voltage	230/460 & 190/380 V
Speed	1770 & 1480 rpm	Service Factor	1.15 & 1.15
Frame	213JM	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	91.7 & 92 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	18.6/9.3 & 16.4/8.2 A	Power Factor	83
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	н
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Y
CE	Y	IP Code	43
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	1.035 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JM	Overall Length	20.65 in
Frame Length	9.65 in	Shaft Diameter	0.875 in
Shaft Extension	4.25 in	Assembly/Box Mounting	F1/F2 CAPABLE
Connection Drawing	EE7308	Outline Drawing	SS620561-213TC

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

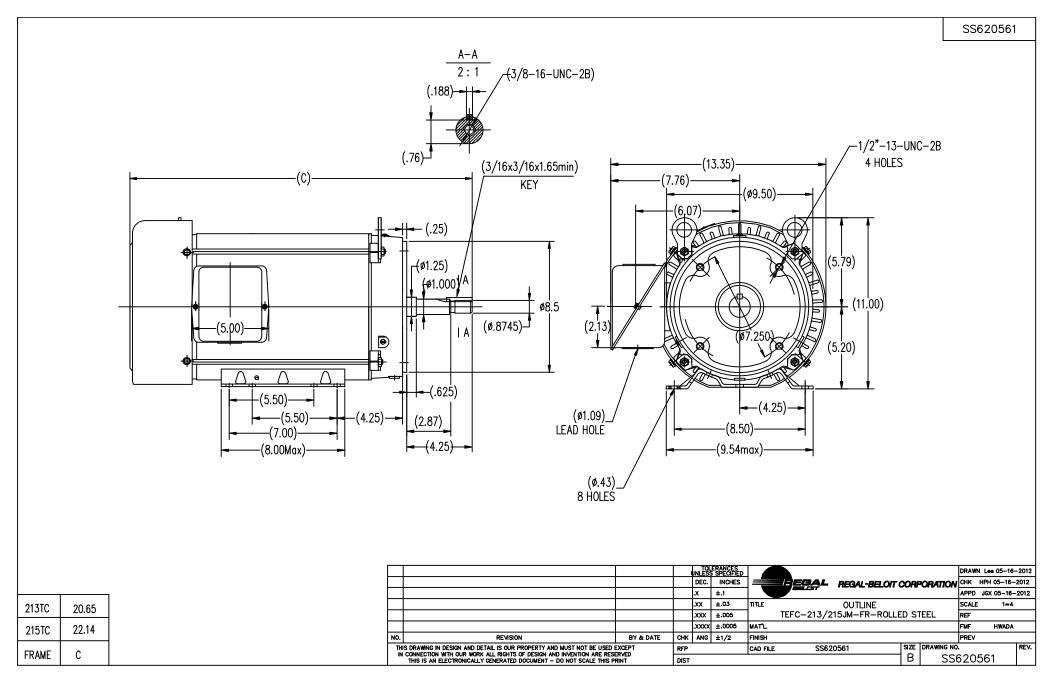

Uncontrolled Copy



CERTIFICATION DATA SHEET

Model#:	213TTFB6031 AA	WINDING#:	CHT21340005 NONE 1
CONN. DIAGRAM:	EE7308	ASSEMBLY:	F1/F2 CAPABLE
OUTLINE:	SS620561		

TYPICAL MOTOR PERFORMANCE DATA

НР	ĸw	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
7 1/2&5	5.6&3.7	1800	1770&1480	213JM	TEFC	Н	В

РН	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#190/	18.6/9.3&16.4/	LINE OR	CONTINUOU	F3	1.15/1.15	40	3300
		380	8.2	INVERTER	S				

FULL LOAD EFF: 91.7&92	3/4 LOAD EFF: 91.7	1/2 LOAD EFF: 90.2	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 83&74.5	3/4 LOAD PF: 75	1/2 LOAD PF: 60.5	91	SQ CAGE INV RATED	9.6 / 4.8

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
22.2 LB-FT	126 / 63	40 LB-FT 176	64.6 LB-FT 290	35

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
62 dBA	72 dBA	0.9 LB-FT^2	75 LB-FT^2	25 SEC.	2	175 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEAF	RINGS	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	JM	NONE	NONE	1045 HOT	ROLLED STEEL
6309	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS		THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further

information

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE					
INV. HP SPEED RAN	NGE: NONE				
ENCODER: NONE					
NONE NONE					
NONE NONE PPR					
BRAKE: NONE	NONE				
NONE P/N NO	DNE				
NONE NONE					
NONE FT-LB NONE V NONE Hz					

DATE: 06/22/2017 05:11:38 AM

FORM 3531 REV.3 02/07/99

** Subject to change without notice.

- * N
- O T
- Е
- S
- *

Uncontrolled Copy

