# PRODUCT INFORMATION PACKET



Model No: 213TTFB6092 Catalog No: GT3211

3 HP Close-Coupled Pump Motor, 3 phase, 1200 RPM, 575 V, 213JMV Frame, TEFC

**Close-Coupled Pump Motors** 







Product Information Packet: Model No: 213TTFB6092, Catalog No:GT3211 3 HP Close-Coupled Pump Motor, 3 phase, 1200 RPM, 575 V, 213JMV Frame, TEFC




### Nameplate Specifications


Output HP	3 Hp	Output KW	2.2 kW
Frequency	60 Hz	Voltage	575 V
Current	3.5 A	Speed	1180 rpm
Service Factor	1.15	Phase	3
Efficiency	89.5 %	Power Factor	74
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	н
Frame	213JMV	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No	Ambient Temperature	40 °C
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	2.605 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal Or Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JM	Overall Length	20.65 in
Shaft Diameter	0.875 in	Shaft Extension	4.25 in
Assembly/Box Mounting	F1/F2 CAPABLE		
Outline Drawing	SS620561-213TC	Connection Drawing	EE7300

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/12/2021

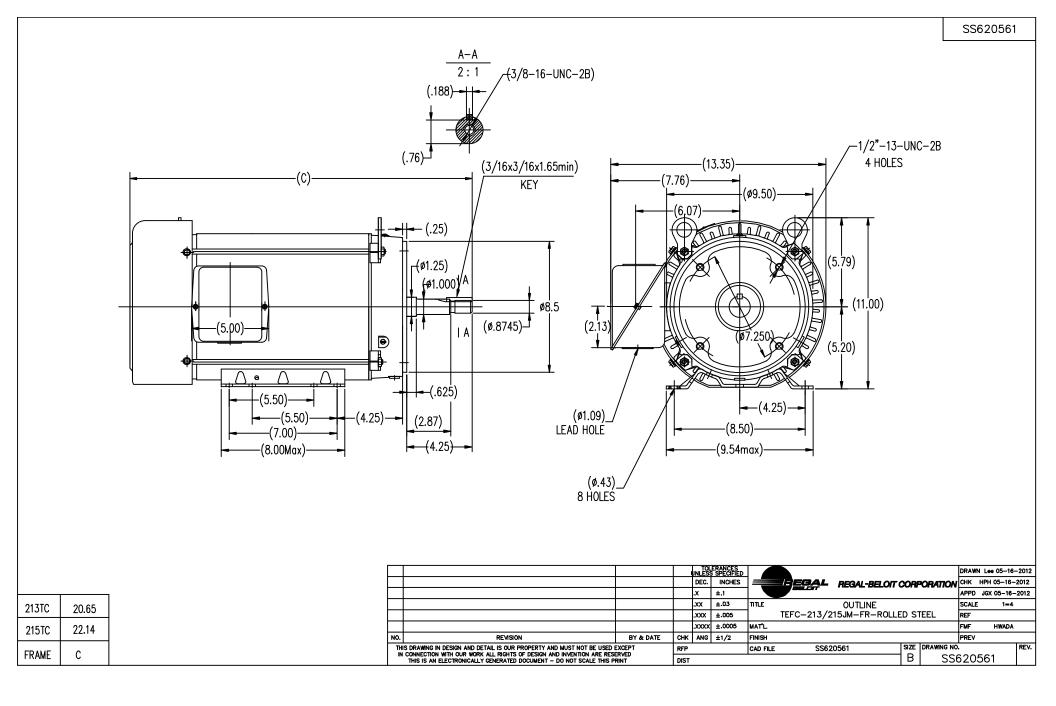

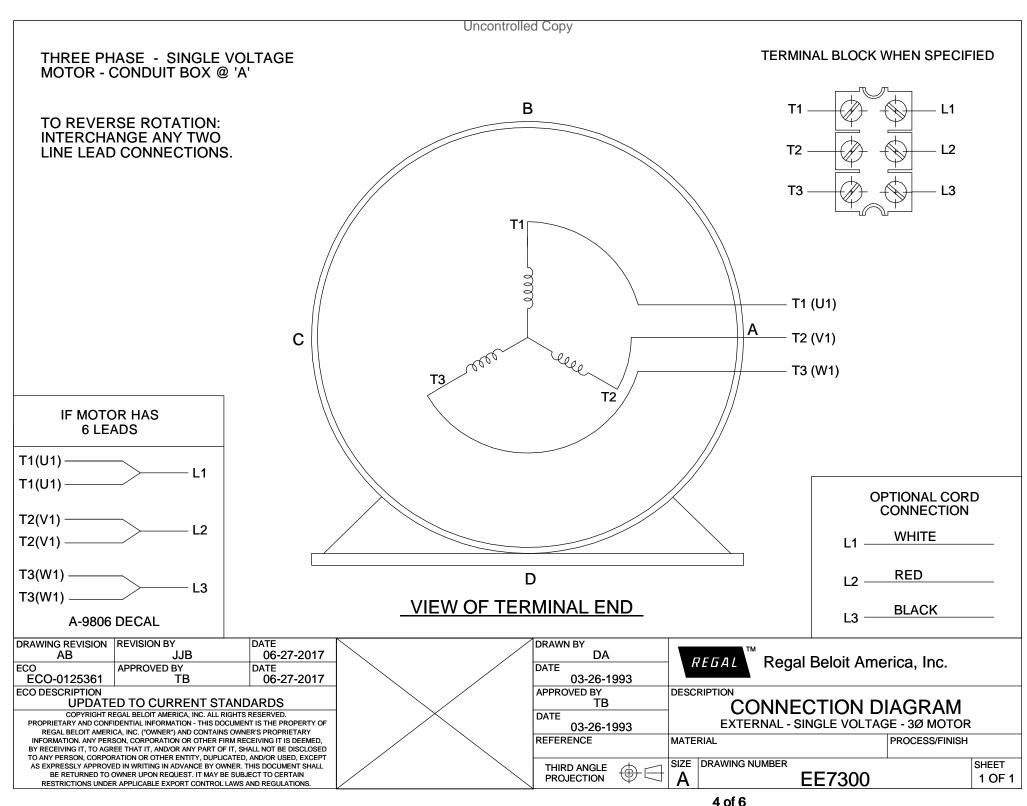

#### **CERTIFICATION DATA SHEET**

 Model#:
 213TTFB6092 AA
 WINDING#:
 CHT21360005 NONE 3

 CONN. DIAGRAM:
 EE7300
 ASSEMBLY:
 F1/F2 CAPABLE

OUTLINE: SS620561

#### **TYPICAL MOTOR PERFORMANCE DATA**

НР	KW	SYI	NC. RPM	F.L. RPM	FRAME	ENCLOS	SURE K	VA CODE	DESIGN
3	2.24		1200	1180	213JMV	TEF	c	Н	В
PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60	575	3.45	LINE OR	CONTINUOU	F7	1.15	40	3300
				INVERTER	S				

FULL LOAD EFF: 89.5	3/4 LOAD EFF: 88.5	1/2 LOAD EFF: 86.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 74	3/4 LOAD PF: 68	1/2 LOAD PF: 56	88.5	SQ CAGE INV RATED	1.8

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
13.3 LB-FT	20.8	25.8 LB-FT 195	39.2 LB-FT 295	55

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
55 dBA	65 dBA	0.95 LB-FT^2	90 LB-FT^2	25 SEC.	2	200 LBS.

#### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL OR SHAFT	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)
			DOWN					

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	JM	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

N O T E S

> DATE: 06/22/2017 05:14:43 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

