

PRODUCT INFORMATION PACKET







marathon[®]

Product Information Packet: Model No: 213TTFC6002, Catalog No:U624A General Purpose Motor, 7.50 & 5 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM, 213T Frame, TEFC

marathon®


Nameplate Specifications

3	Output HP	7.50 & 5 Hp
5.6 & 3.7 kW	Voltage	230/460 & 190/380 V
3539 & 2950 rpm	Service Factor	1.15 & 1.15
213T	Enclosure	Totally Enclosed Fan Cooled
No Protection	Efficiency	91 & 90.2 %
40 °C	Frequency	60 & 50 Hz
15/7.5 & 14.4/7.2 A	Power Factor	85.5
Continuous	Insulation Class	F
В	KVA Code	н
6308	Opp Drive End Bearing Size	6306
Recognized	CSA	Y
Y	IP Code	43
1		
	5.6 & 3.7 kW 3539 & 2950 rpm 213T No Protection 40 °C 15/7.5 & 14.4/7.2 A Continuous B 6308 Recognized	5.6 & 3.7 kWVoltage3539 & 2950 rpmService Factor213TEnclosureNo ProtectionEfficiency40 °CFrequency15/7.5 & 14.4/7.2 APower FactorContinuousInsulation ClassBKVA Code6308Opp Drive End Bearing SizeRecognizedCSA

Technical Specifications

Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
2	Rotation	Reversible
1.015 Ohms	Mounting	Rigid Base
Horizontal	Drive End Bearing	Ball
Ball	Frame Material	Cast Iron
т	Overall Length	18.19 in
1.375 in	Shaft Extension	3.38 in
F1/F2 CAPABLE		
005010.01	Outline Drawing	16953560ME
	2 1.015 Ohms Horizontal Ball T 1.375 in F1/F2 CAPABLE	2Rotation1.015 OhmsMountingHorizontalDrive End BearingBallFrame MaterialTOverall Length1.375 inShaft ExtensionF1/F2 CAPABLE

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

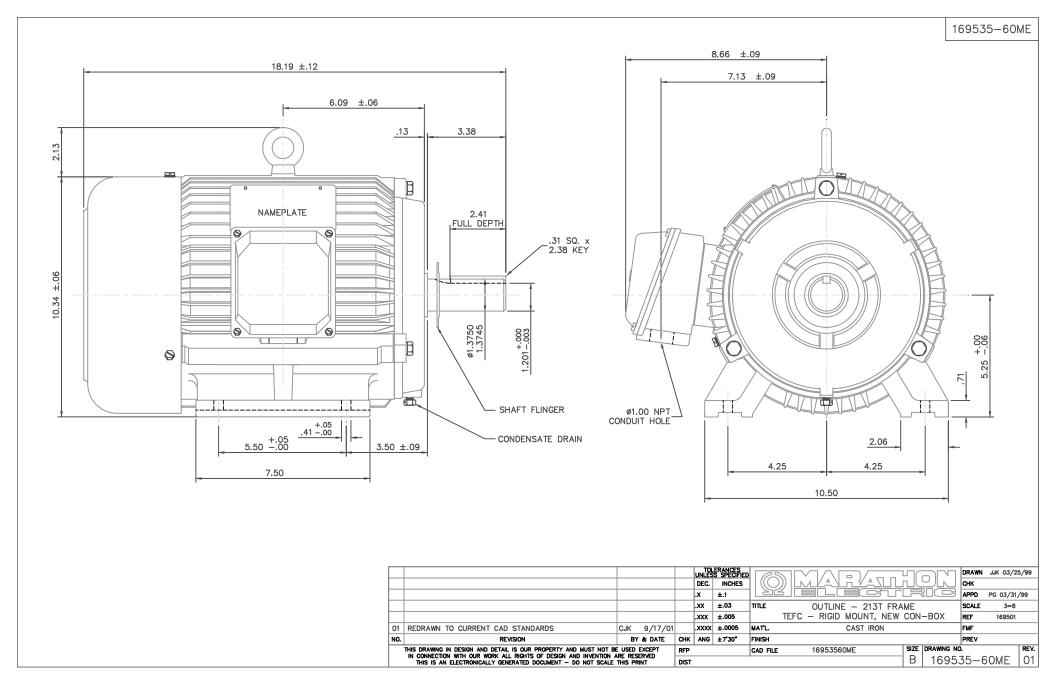

Uncontrolled Copy

