PRODUCT INFORMATION PACKET




Model No: 213TTFC6080

Catalog No: GT1111

General Purpose Motors, TEFC, 3 HP, 3 Ph, 60 Hz, 575 V, 1185 RPM, 213T

General Purpose Motors










Nameplate Specifications

Output HP	3 Нр	Output KW	2.2 kW
Frequency	60 Hz	Voltage	575 V
Current	3.5 A	Speed	1185 rpm
Service Factor	1.15	Phase	3
Efficiency	89.5 %	Power Factor	74
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	К
Frame	213T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No	Ambient Temperature	40 °C
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

Technical Specifications

Poles 6 Rotation Reversible Resistance Main 2.605 Ohms Mounting Rigid Base Motor Orientation Horizontal Drive End Bearing Ball Opp Drive End Bearing Ball Frame Material Cast Iron Shaft Type T Overall Length 18.23 in Shaft Diameter 1.375 in Shaft Extension 3.37 in Assembly/Box Mounting F1/F2 CAPABLE	Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Motor OrientationHorizontalDrive End BearingBallOpp Drive End BearingBallFrame MaterialCast IronShaft TypeTOverall Length18.23 inShaft Diameter1.375 inShaft Extension3.37 inAssembly/Box MountingF1/F2 CAPABLE	Poles	6	Rotation	Reversible
Opp Drive End Bearing Ball Frame Material Cast Iron Shaft Type T Overall Length 18.23 in Shaft Diameter 1.375 in Shaft Extension 3.37 in Assembly/Box Mounting	Resistance Main	2.605 Ohms	Mounting	Rigid Base
Shaft Type T Overall Length 18.23 in Shaft Diameter 1.375 in Shaft Extension 3.37 in Assembly/Box Mounting F1/F2 CAPABLE	Motor Orientation	Horizontal	Drive End Bearing	Ball
Shaft Diameter 1.375 in Shaft Extension 3.37 in Assembly/Box Mounting F1/F2 CAPABLE	Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Assembly/Box Mounting F1/F2 CAPABLE	Shaft Type	Т	Overall Length	18.23 in
· · · · · ·	Shaft Diameter	1.375 in	Shaft Extension	3.37 in
Connection Drawing A FE7200 Outline Drawing SS620201 212T	Assembly/Box Mounting	F1/F2 CAPABLE		
Connection Drawing A-EE/300 Outline Drawing S3620291-2131	Connection Drawing	A-EE7300	Outline Drawing	SS620291-213T

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:03/02/2022

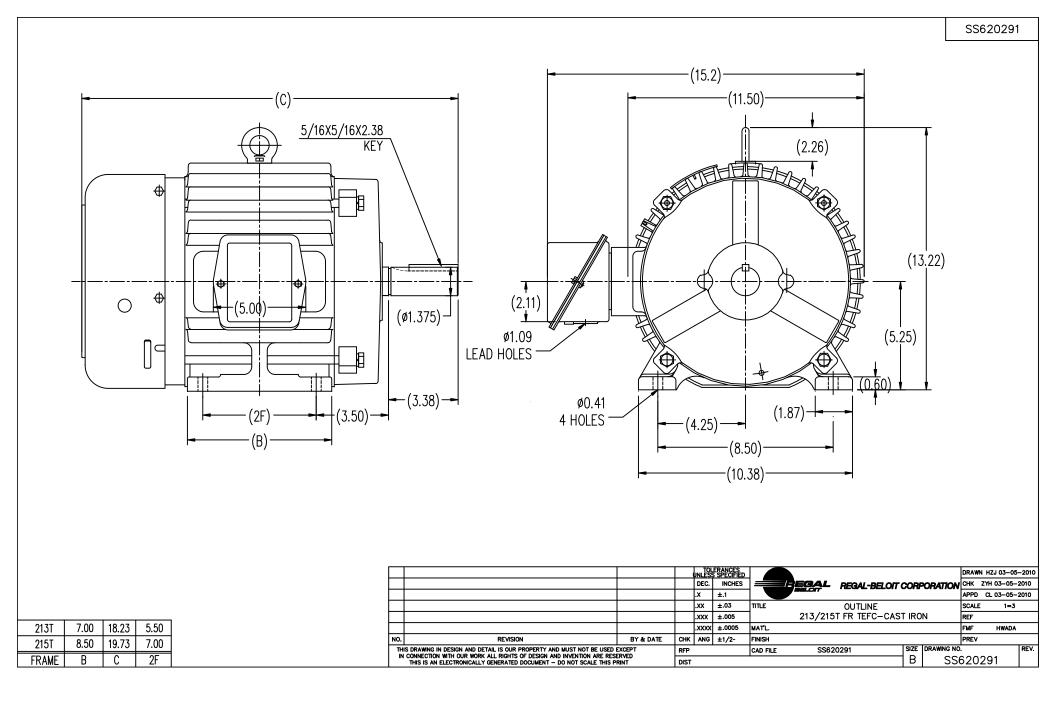



CERTIFICATION DATA SHEET

213TTFC6080 AA WINDING#: CHT21360001 NONE 3 Model#: ASSEMBLY: CONN. DIAGRAM: A-EE7300 F1/F2 CAPABLE

OUTLINE: B-SS620291

TYPICAL MOTOR PERFORMANCE DATA

НР	KW	SY	NC. RPM	F.L. RPM	FRAME	ENCLO	SURE	KVA CODE	DESIGN
3	2.24	1	1200	1185	213T	TEF	С	К	В
PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60	575	3.45	ACROSS THE	CONTINUOU	F7	1.15	40	3300
				LINE	S				

FULL LOAD EFF: 89.5	3/4 LOAD EFF: 88.5	1/2 LOAD EFF: 86.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 74	3/4 LOAD PF: 68	1/2 LOAD PF: 56	88.5	SQ CAGE IND RUN	1.8

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
13.3 LB-FT	25.6	22 LB-FT 165	37 LB-FT 278	40

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
55 dBA	65 dBA	1.2 LB-FT^2	90 LB-FT^2	25 SEC.	2	220 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	1045 HOT	CAST IRON
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	THERMOSTATS PROTECTORS WDG RTDs BRG RTDs					
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: NONE INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

Ν 0 Т Е S

> DATE: 06/22/2017 05:41:44 AM FORM 3531 REV.3 02/07/99 ** Subject to change without notice.

