

# PRODUCT INFORMATION PACKET

**marathon®**  
Motors

Model No: 213TTFW6076

Catalog No: E2011

XRI® General Purpose General Purpose Motor, 3 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 200/400 V,  
1200 & 1000 RPM, 213TC Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E


**RegalRexnord**

### Nameplate Specifications


Phase	3	Output HP	3 & 3 Hp
Output KW	2.2 & 2.2 kW	Voltage	230/460 & 200/400 V
Speed	1170 & 970 rpm	Service Factor	1.15 & 1.0
Frame	213TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	89.5 & 87.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	8.8/4.4 & 10/5 A	Power Factor	70
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	K
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Y
CE	Y	IP Code	43
Number of Speeds	1		

### Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	2.785 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	T	Overall Length	19.47 in
Frame Length	9.65 in	Shaft Diameter	1.375 in
Shaft Extension	3.12 in	Assembly/Box Mounting	F3
Outline Drawing	A-SS88794-965	Connection Drawing	A-EE7308

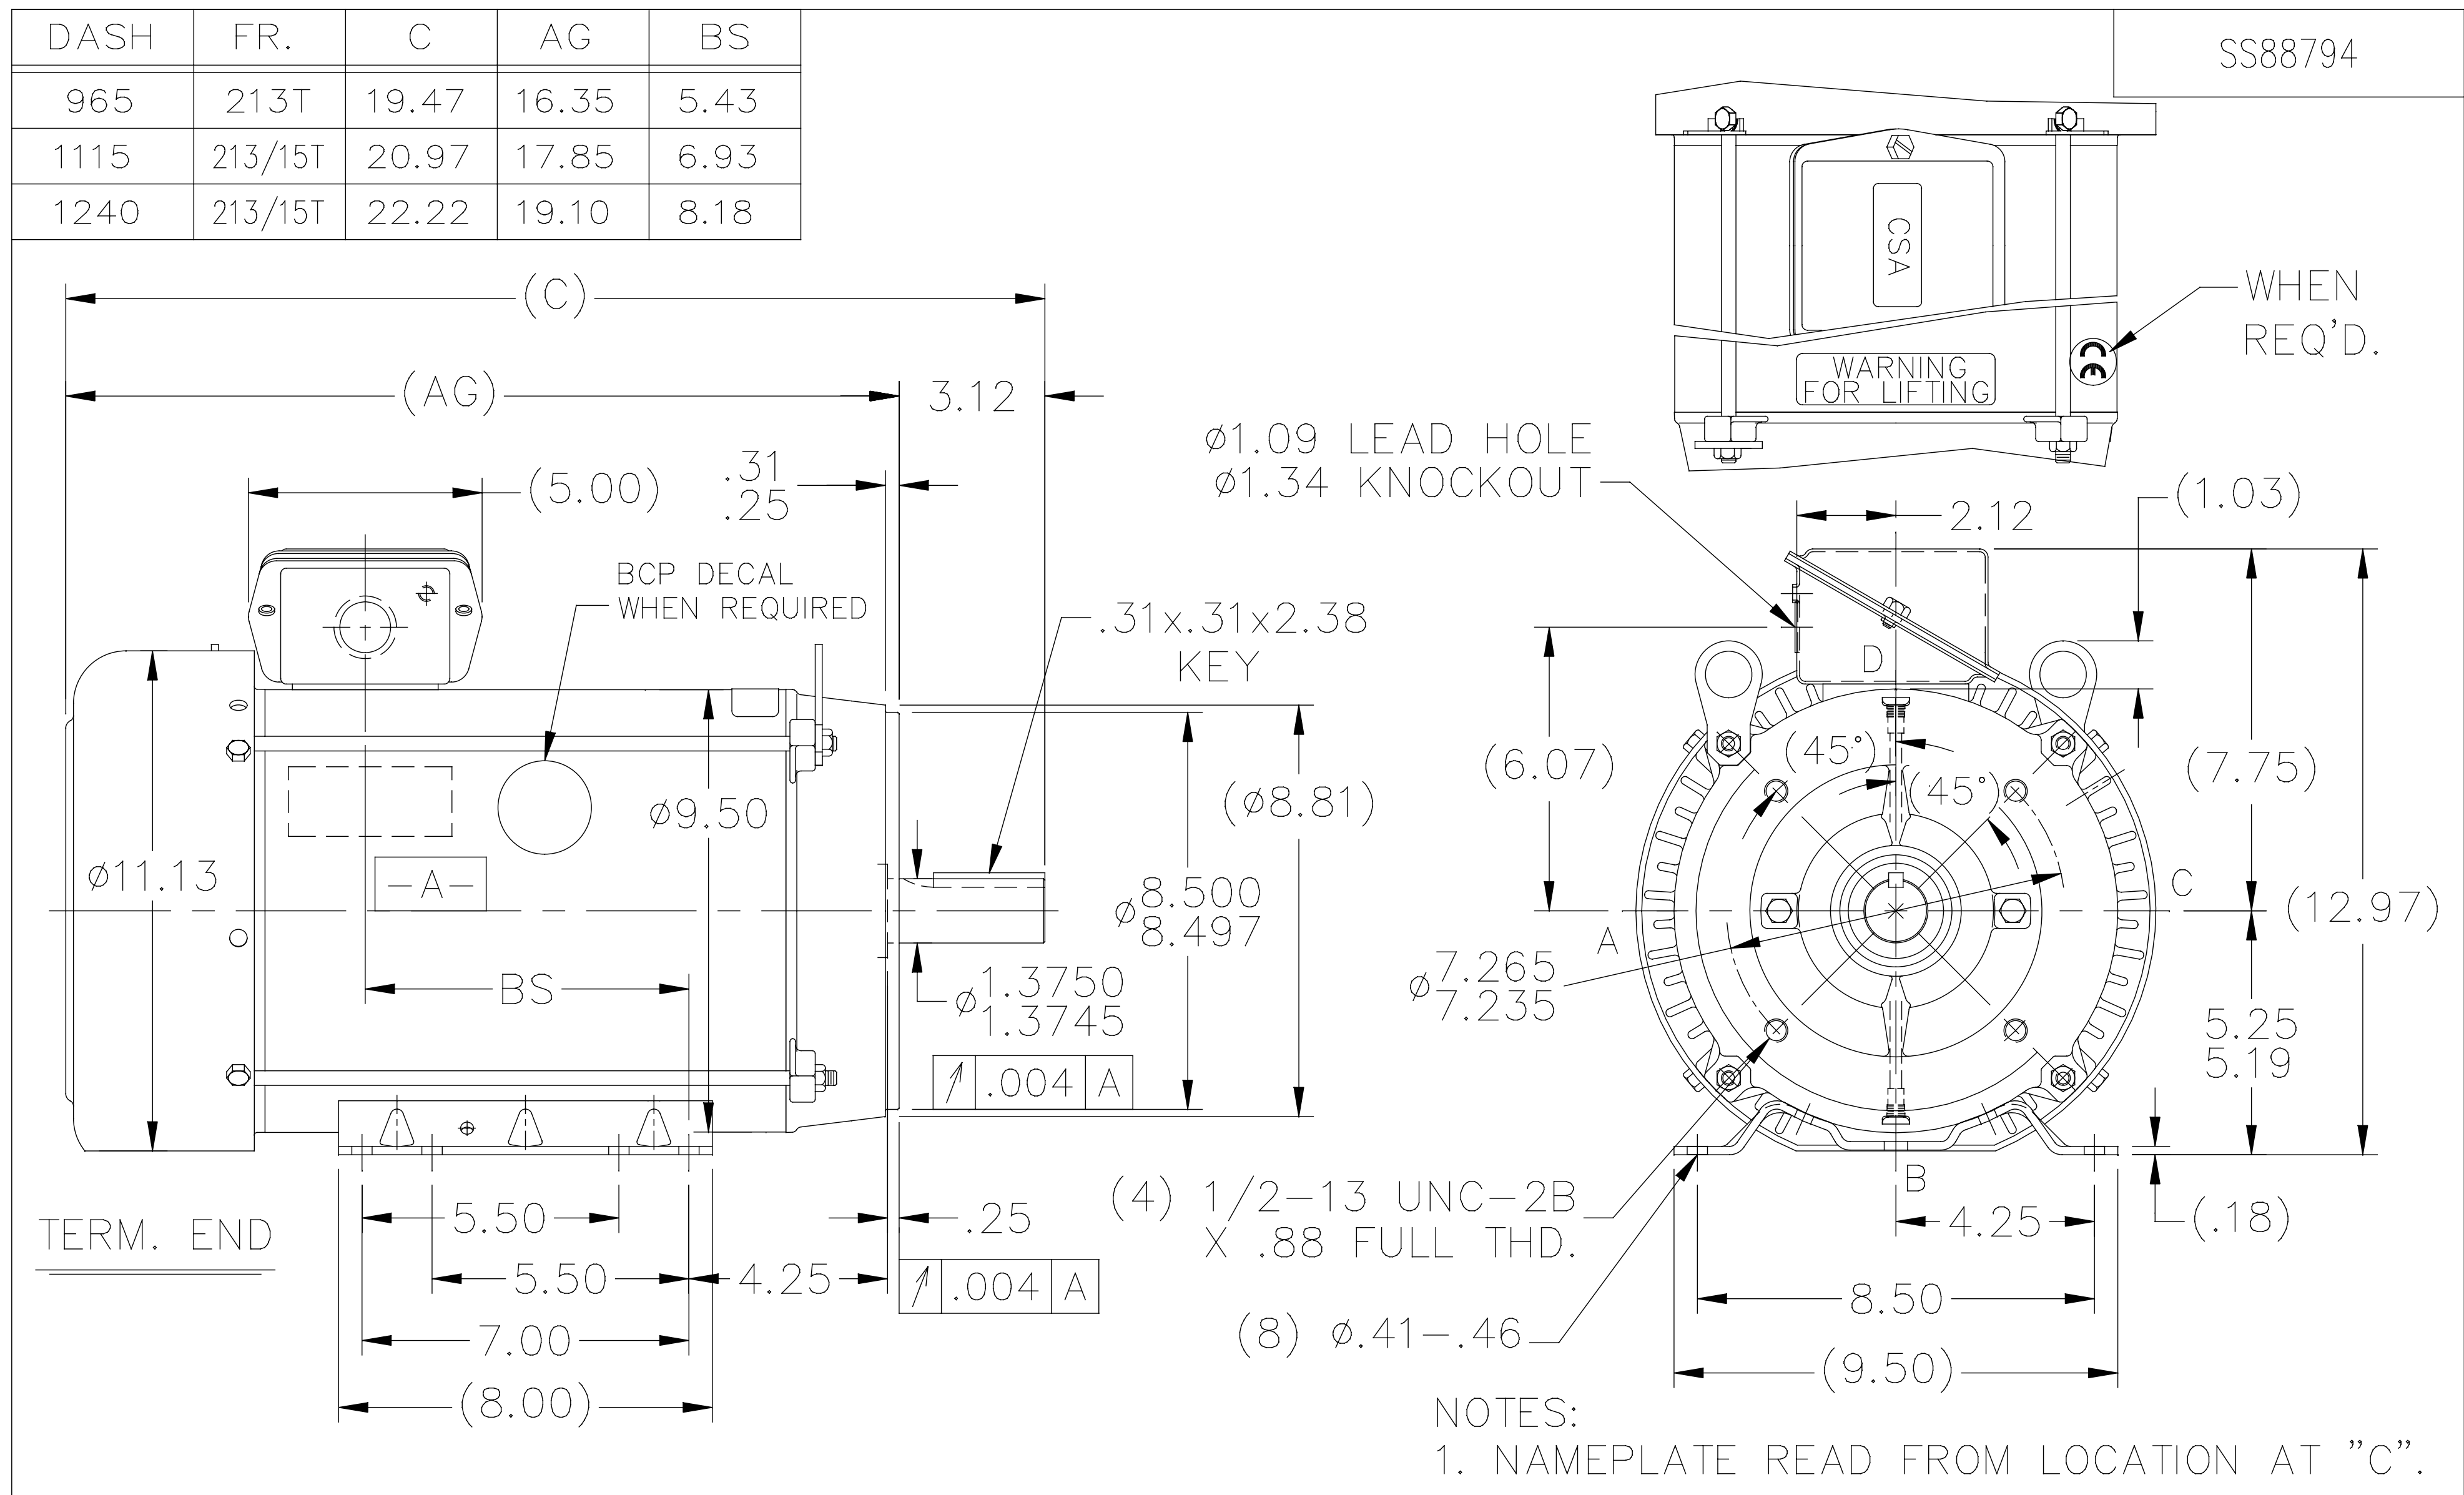

NOTES:  
1. NAMEPLATE READ FROM LOCATION AT "C".

				TOLERANCES UNLESS SPECIFIED		 <b>Regal Beloit America, Inc.</b>		DRAWN TAT 08-13-2004			
				DEC.	INCHES			CHK	ML	08-13-2004	
				.X	±.1			APPD	TB	08-13-2004	
				.XX	±.03			SCALE 1=5			
				.XXX	±.005			REF			
1	TITLE BLOCK LOGO CHANGE PER ECO-0078542	MDV 06/09/2015		.XXXX	±.0005	MAT'L.			FMF		
NO.	REVISION	BY & DATE	CHK	ANG	± 7'30"	FINISH			PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT			RFP		CAD FILE ss88794			SIZE A	DRAWING NO. SS88794	PAGE OF	REV. 1
			DIST LB								



				TOLERANCES UNLESS SPECIFIED		 <b>Regal Beloit America, Inc.</b>	DRAWN RM 11/20/1990		
5	CHG TO REGAL LOGO	SL 09/10/2015	AB	DEC.	INCHES		CHK ML 11/21/1990		
4	REVISED IEC NOTATIONS	MSG 11/15/2011	CMN	.X	±.1		APPD SAS 04/24/2003		
3	ADDED IEC NOTATIONS... (U1), (V1) ETC. MU95194	MSG 5/10/2010	MJS	.XX	±.02		SCALE 1=1		
2	ADDED THE OPTIONAL CORD CONNECTION MU46318	RDH 04/24/2003	DRS	.XXX	±.005	TITLE CONNECTION DIAGRAM 3ø – DUAL VOLTAGE MOTOR	REF		
1	REDRAWN	RM 11/20/1990		.XXXX	±.0005	MAT'L.	FMF		
NO.	REVISION	BY & DATE	CHK	ANG	±7"30"	FINISH	PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT			RFP		CAD FILE ee7308	SIZE A	DRAWING NO. EE7308	PAGE OF	REV. 5
			DIST WP						

## CERTIFICATION DATA SHEET

Model#: 213TTFW6076 AA  
 CONN. DIAGRAM: A-EE7308  
 OUTLINE: A-SS88794-965

WINDING#: K213660 R11 6  
 ASSEMBLY: F3

## TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
3&3	2.24&2.24	1200	1170&970	213TC	TEFC	K	B

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#200/ 400	8.8/4.4&10/5	LINE OR INVERTER	CONTINUOU S	F4	1.15/1.0	40	3300

FULL LOAD EFF: 89.5&87.5	3/4 LOAD EFF: 89.5	1/2 LOAD EFF: 87.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 70&75	3/4 LOAD PF: 62	1/2 LOAD PF: 49.5	88.5	SQ CAGE INV RATED	5 / 2.5

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
13.5 LB-FT	64 / 32	34 LB-FT 252	47.5 LB-FT 352	45

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
55 dBA	65 dBA	0.8 LB-FT^2	90 LB-FT^2	25 SEC.	2	150 LBS.

## \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL
DE	OPE						
BALL	BALL						
6309	6206	POLYREX EM	T	NONE	NONE	AISI 1045 (C-240)	ROLLED STEEL

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further  
information

INVERTER TORQUE: CONSTANT 10:1		
INV. HP SPEED RANGE: 1.5 X BASE SPEED		
ENCODER: NONE		
NONE NONE		
NONE NONE PPR		
BRAKE: NONE NONE		
NONE P/N NONE		
NONE NONE		
- FT-LB	NONE V	NONE Hz

\*  
N  
O  
T  
E  
S  
\*

DATE: 06/22/2017 05:58:30 AM  
 FORM 3531 REV.3 02/07/99  
 \*\* Subject to change without notice.

## Data Sheet

Date: 6/29/2017

Customer: \_\_\_\_\_

Attention: \_\_\_\_\_

Submitted by: FAREEDA DUDEKULA



213TTFW6076

Submittal

Data @ 460 V

## Motor Load Data

Load	0%	25%	50%	75%	100%	115%	125%	LR	
Current (Amps)	2.50	2.70	3.2	3.8	4.4	5.0	5.3	32.0	
Torque (ft-lb)	0.00	3.3	6.7	10.0	13.5	15.5	17.0	34.0	
RPM	1200	1194	1186	1180	1170	1,168	1166	0	
Efficiency (%)		81.0	87.5	89.5	89.5	89.5	88.5		
P.F. (%)	6.0	32.0	49.5	62.0	70.0	73.0	75.0	40.0	

## Motor Speed Data

	LR	Pull-Up	BD	Rated	Idle	Information Block				
Speed (RPM)	0	600	1025	1170	1200	HP	3.0			
Current (Amps)	32.0	28.0	20.0	4.4	2.50	Sync. RPM	1200			
Torque (ft-lb)	34.0	32.0	47.5	13.5	0.00	Frame	213			
<div><div>— Efficiency (%)</div><div>— P.F. (%)</div><div>— Current (Amps)</div><div>EFFICIENCY (%)</div><div>P.F. (%)</div><div>CURRENT (AMPS)</div><div>LOAD</div></div>						Enclosure	TEFC			
						Construction	TFW			
						Voltage	30/460#200/40V			
						Frequency	60 Hz			
						Design	B			
						LR Code letter	K			
						Service Factor	1.15			
						Temp Rise @ FL	45 °C			
						Duty	CONT			
						Ambient	40 °C			
						Elevation	1,000 feet			
						Rotor/Shaft wk <sup>2</sup>	0.80 Lb-Ft <sup>2</sup>			
						Ref Wdg	K213660 R11			
						Sound Pressure @ 1M	55 dBA			
						VFD Rating	CONSTANT 10:1			
						Outline Dwg	A-SS88794-965			
						Conn. Diag	A-EE7308			
Additional Specifications:										
0										
0										
EQUIV CKT (OHMS / PHASE)										
R1		R2		X1		X2		Xm		
1.6270		1.5890		6.7630		7.7850		95.0630		

## Speed -Torque Curve

