# PRODUCT INFORMATION PACKET



Model No: 215TTDB6095 Catalog No: GT2514

5 HP Close-Coupled Pump Motor, 3 phase, 1200 RPM, 575 V, 215JPV Frame, ODP

**Close-Coupled Pump Motors** 





Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E

Product Information Packet: Model No: 215TTDB6095, Catalog No:GT2514 5 HP Close-Coupled Pump Motor, 3 phase, 1200 RPM, 575 V, 215JPV Frame, ODP




# Nameplate Specifications


Output HP	5 Hp	Output KW	3.7 kW	
Frequency	60 Hz	Voltage	575 V	
Current	5.6 A	Speed	1178 rpm	
Service Factor	1.15	Phase	3	
Efficiency	89.5 %	Power Factor	76	
Duty	Continuous	Insulation Class	F	
Design Code	В	KVA Code	G	
Frame	215JPV	Enclosure	Drip Proof	
Thermal Protection	No	Ambient Temperature	40 °C	
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206	
UL	Recognized	CSA	Υ	
CE	Υ	IP Code	22	
Number of Speeds	1			

# **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	1.62 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal Or Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JP	Overall Length	23.11 in
Shaft Diameter	1.250 in	Shaft Extension	8.14 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	VARIABLE 10:1
Connection Drawing	EE7300	Outline Drawing	SS620571

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/06/2021

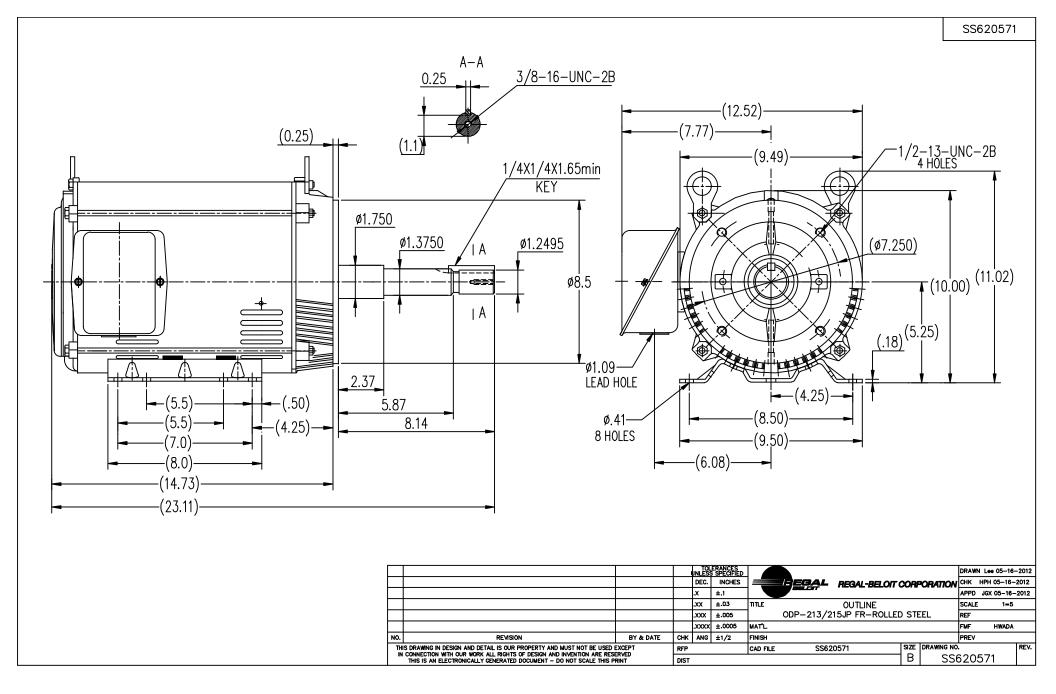

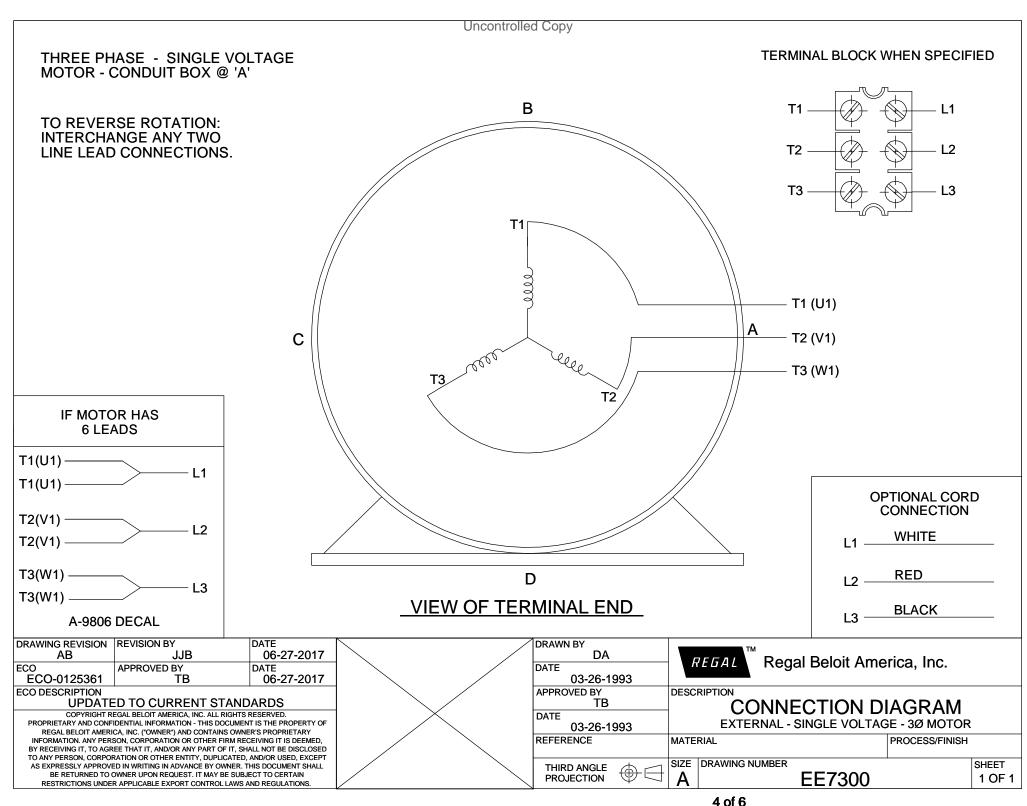

### **CERTIFICATION DATA SHEET**

 Model#:
 215TTDB6095 AA
 WINDING#:
 CHT21560006 NONE 3

 CONN. DIAGRAM:
 EE7300
 ASSEMBLY:
 F1/F2 CAPABLE

OUTLINE: SS620571

### **TYPICAL MOTOR PERFORMANCE DATA**

HP	KW	/ SY	NC. RPM	F.L. RPM	FRAME	ENCLOS	SURE K	/A CODE	DESIGN
5	3.7	0	1200	1178	215JPV	DP		G	В
		,							

	PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
	3	60	575	5.6	LINE OR	CONTINUOU	F7	1.15	40	3300
Į					INVERTER	S				

FULL LOAD EFF: 89.5	3/4 LOAD EFF: 89.5	1/2 LOAD EFF: 87.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 76	3/4 LOAD PF: 71	1/2 LOAD PF: 61	88.5	SQ CAGE INV RATED	2.6

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
22.2 LB-FT	28.8	34 LB-FT 153	49 LB-FT 220	50

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
62 dBA	72 dBA	1.1 LB-FT^2	75 LB-FT^2	20 SEC.	2	200 LBS.

### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL OR SHAFT	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)
			DOWN					

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	JP	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS	PROTECTORS WDG RTDs BRG RTDs				
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

N O T E S

> DATE: 06/22/2017 07:19:57 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

5 of 6

