# **PRODUCT INFORMATION PACKET**

Model No: 215TTDBD6095 Catalog No: GT2514A Globetrotter® Close-Coupled Pump Motor, 5 HP, 3 Ph, 60 Hz, 575 V, 1200 RPM, 215JP Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E



marathon<sup>®</sup>

Motors





Product Information Packet: Model No: 215TTDBD6095, Catalog No:GT2514A Globetrotter® Close-Coupled Pump Motor, 5 HP, 3 Ph, 60 Hz, 575 V, 1200 RPM, 215JP Frame, DP

# marathon®


### Nameplate Specifications

Output HP	5 Нр	Output KW	3.7 kW
Frequency	60 Hz	Voltage	575 V
Current	5.5 A	Speed	1180 rpm
Service Factor	1.15	Phase	3
Efficiency	89.5 %	Power Factor	76
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	L
Frame	215JP	Enclosure	Drip Proof
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	1		

## **Technical Specifications**


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	2.186 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JP	Overall Length	23.11 in
Frame Length	11.15 in	Shaft Diameter	1.249 in
Shaft Extension	8.39 in	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	CONSTANT 4:1/VARIABLE 10:1		
Connection Drawing	EE7300	Outline Drawing	SS620793

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:11/28/2022

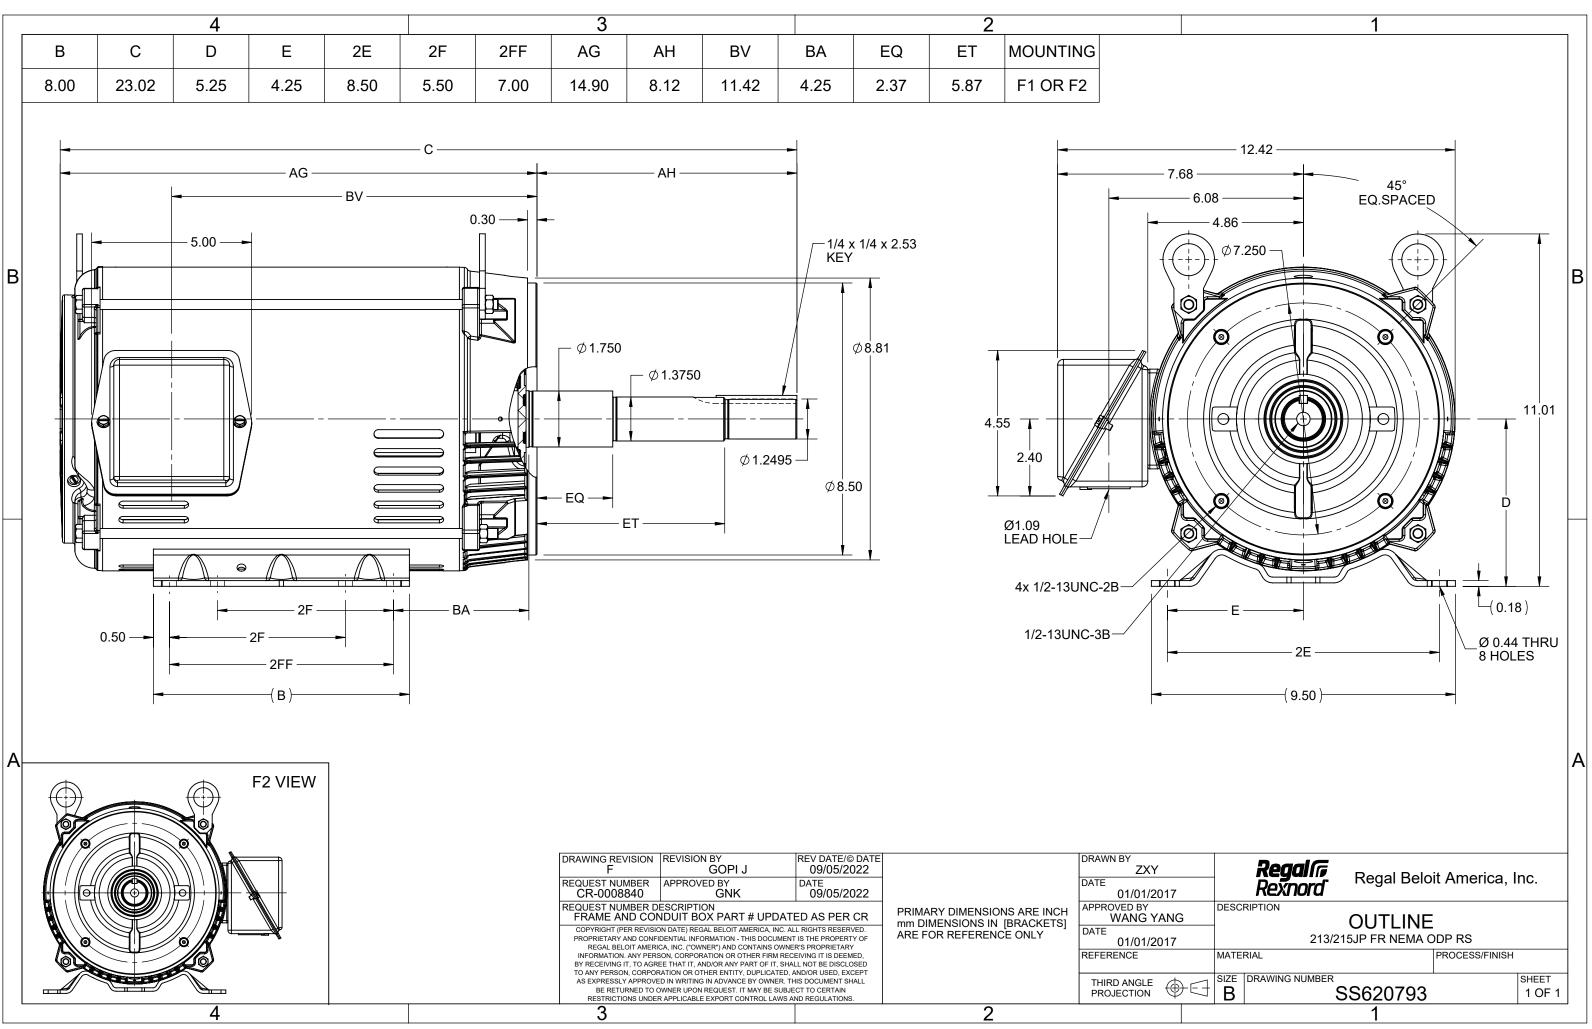

4 of 9

#### **Uncontrolled Copy**

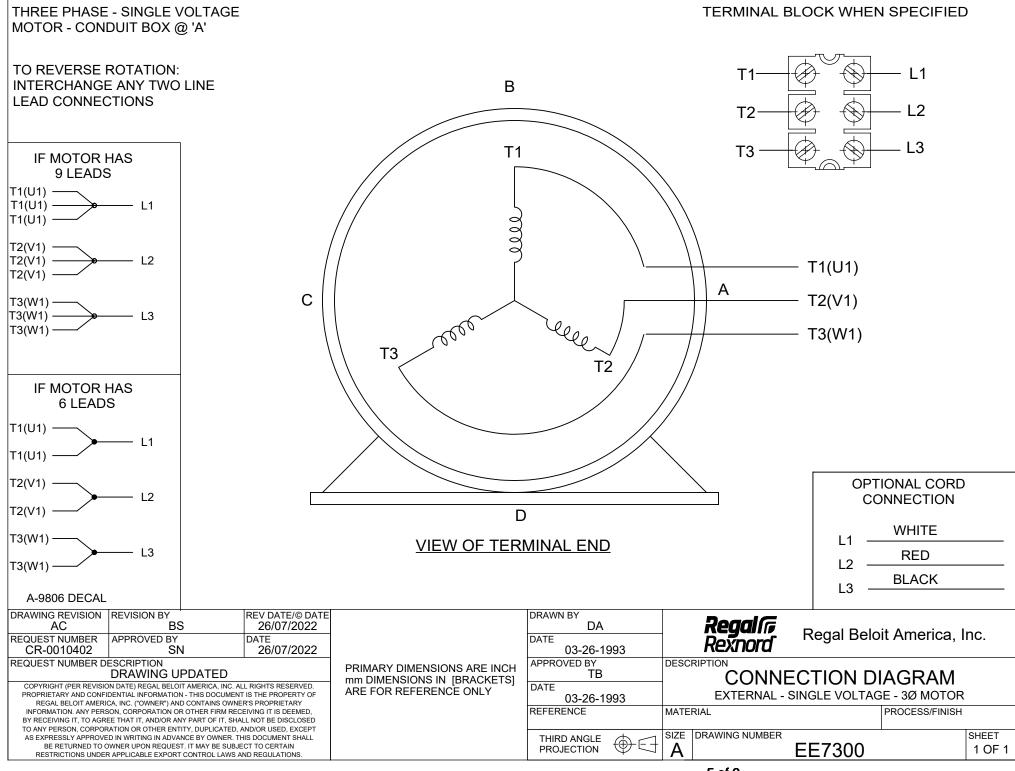



#### P.O. BOX 8003 WAUSAU, WI 54401-8003 PH. 715-675-3311

CERTIFICATION DATA SHEET
CUSTOMER
PO#:

CUSTOMER:

ORDER #:

CONN. DIAGRAM: EE7300

OUTLINE: SS620793 WINDING #: HE31326017

3

MODEL #: 215TTDBD6095 AA CUSTOMER PART #: MOUNTING: F1/F2 CAPABLE

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
5	3.70	1200	1181	215JPV	DP	J	В

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
3	60	575	5.5	LINE OR INVERTER	CONTINUOUS	F7	1.15	40

FULL LOAD EFF:	89.1	3/4 LOAD EFF:	90.1	1/2 LOAD EFF:	84.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	76.4	3/4 LOAD PF:	70.7	1/2 LOAD PF:	62.8	88.5	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS		L.R. TOR	QUE		B.D. TOR	QUE	F.L. RISE°C
22.3 <b>LB-FT</b>	38.4	37	LB-FT	166 %	59	LB-FT	265 %	30

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
62 <b>dBA</b>	72 <b>dBA</b>	1.1 LB-FT^2	75 <b>LB-FT^2</b>	20 <b>SEC.</b>	2	200 LBS.

#### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*


DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL OR SHAFT DOWN	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEAR	BEARINGS GREASE		SHAFT TYPE SPECIAL DE			SHAFT	FRAME
DE	ODE	GREASE	SHAFT TTPE	TYPE SPECIAL DE SPECIAL ODE		MATERIAL	MATERIAL
BALL	POLYREX EM		JP	NONE	NONE		ROLLED STEEL
6307			JP	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL

	THERMO-PROTE	CTORS	THERMISTORS	CONTROL	SPACE HEATERS			
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE	HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE	VOLTS	
* N				INVERTER TORQUE: CONSTAN INV. HP SPEED RANG		BLE 20:1		
0				ENCODER: NONE NONE NONE NONE NONE				
т				BRAKE: NONE	NONE			
E				NONE P/N NO NONE NONE				
S				NONE FT-LB NO	ONE V	NONE HZ	<u>.</u>	

PREPARED BY: Fareeda Dudekula DATE: 05/28/2018 06:59:28 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

\*

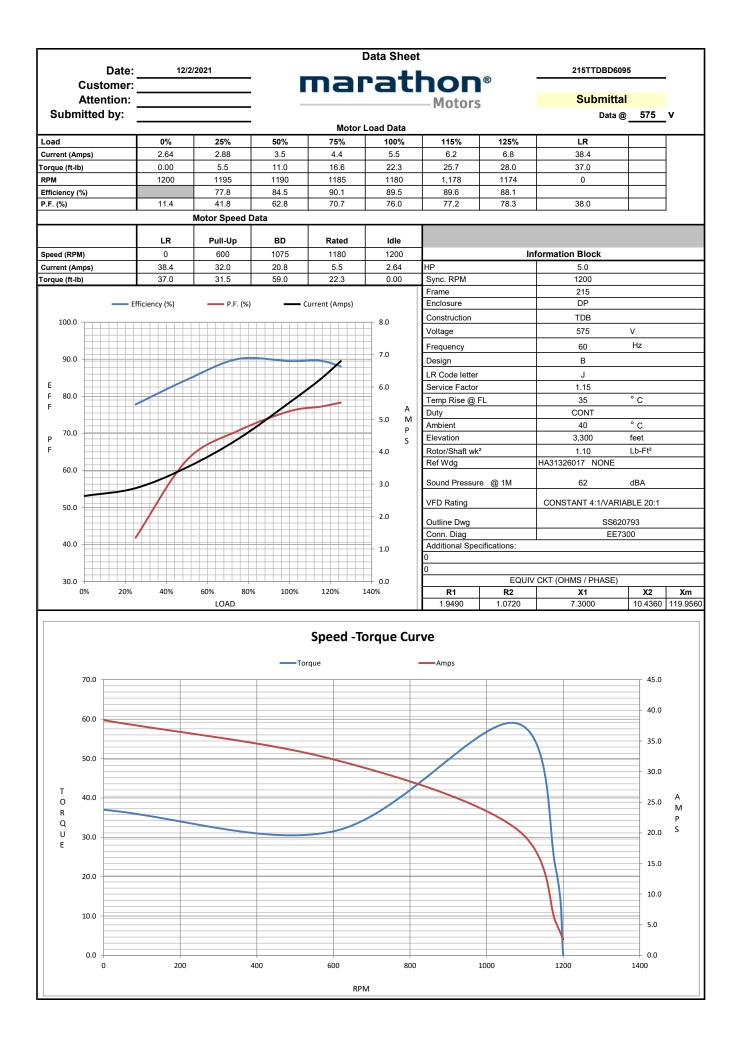



www.regalbeloit.com

## **EC Declaration of Conformity**

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 215TTDBD6095

(Model No. may contain prefix and/or suffix characters)

Catalog No : GT2514A

Rework No : N/A

Directives :

Low Voltage Directive 2014/35/EU

Harmonized Standards Used :

EN 60034-1: 2010 (IEC 60034-1: 2010) EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A Logsdon

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

(€ 22

Authorized Representative in the Community:

Julian Clark Marketing Engineer