# PRODUCT INFORMATION PACKET



Model No: 215TTFB6033
Catalog No: GT3219
10 HP Close-Coupled Pump Motor, 3 phase, 1800 RPM, 575 V, 215JM Frame, TEFC
Close-Coupled Pump Motors



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E






## Nameplate Specifications


Output HP	10 Hp	Output KW	7.5 kW
Frequency	60 Hz	Voltage	575 V
Current	10.3 A	Speed	1768 rpm
Service Factor	1.15	Phase	3
Efficiency	91.7 %	Power Factor	79
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Frame	215JM	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No	Ambient Temperature	40 °C
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.755 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JM	Overall Length	20.65 in
Frame Length	11.15 in	Shaft Diameter	0.875 in
Shaft Extension	4.25 in	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	VARIABLE 10:1		
Connection Drawing	EE7300	Outline Drawing	SS620561-215TC

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/06/2021

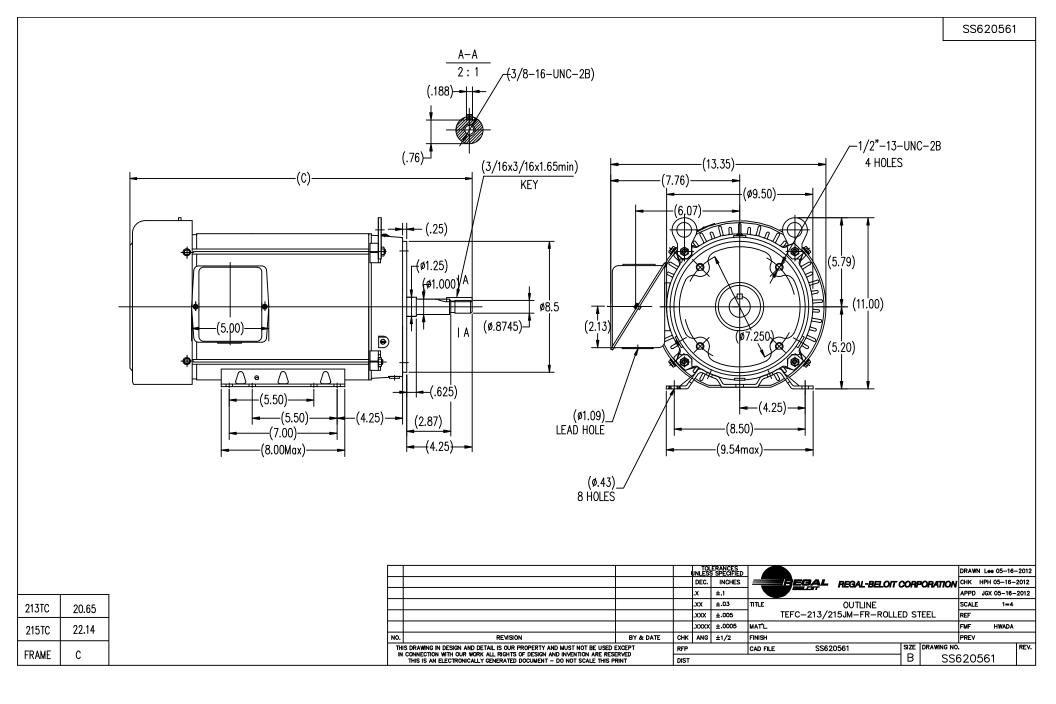

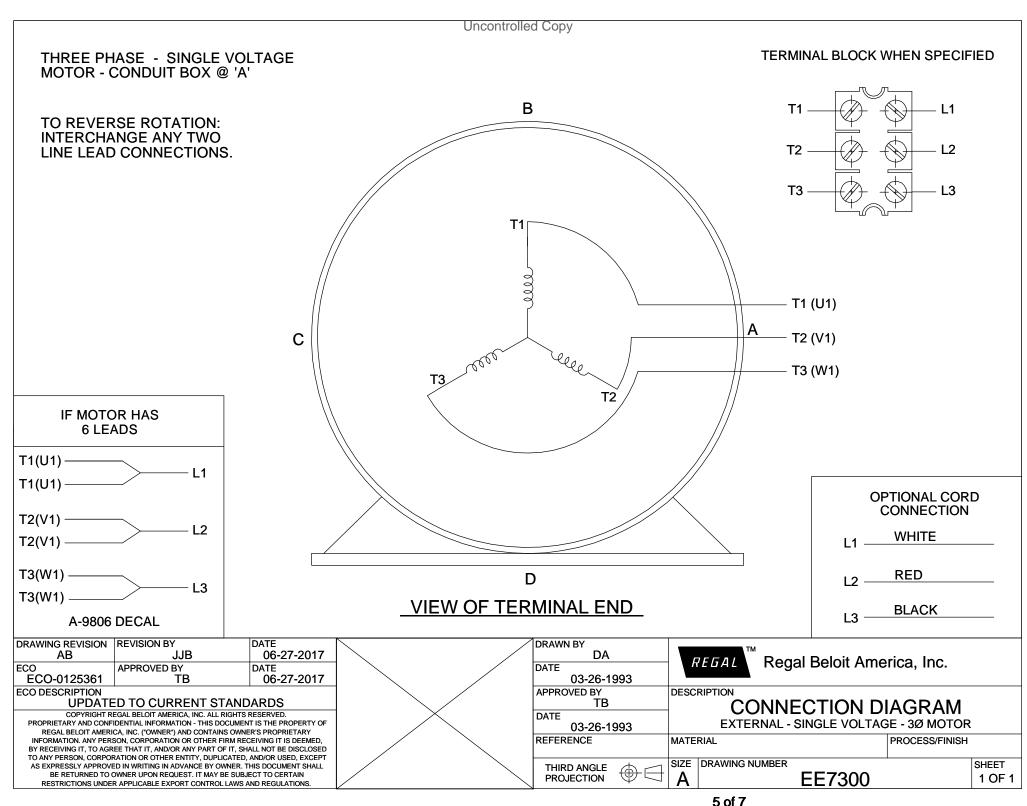

### **CERTIFICATION DATA SHEET**

215TTFB6033 AA WINDING#: CHT21540007 NONE 3 Model#: CONN. DIAGRAM: EE7300 ASSEMBLY: F1/F2 CAPABLE

OUTLINE: SS620561

Ν

0

Т

Е

S

### **TYPICAL MOTOR PERFORMANCE DATA**

ļ	HP	K\	v	SYN	IC. RPM	F.L. RPM	FRAME	ENC	LOSURE	KV.	A CODE	DESIGN
	10	7.5	0		1800	1768	215JM		EFC		G	В
ſ		1	,					ı———			1	
	PH	Hz	VOL	.TS	FL AMPS	START TYPE	DUTY	INSL	;	S.F	AMB°C	ELEVATION
1			¬——					1			1'	

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	<b>AMB°C</b>	ELEVATION
3	60	575	10.3	LINE OR	CONTINUOU	F7	1.15	40	3300
				INVERTER	S				

FULL LOAD EFF: 91.7	3/4 LOAD EFF: 91.7	1/2 LOAD EFF: 91	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 79	3/4 LOAD PF: 75	1/2 LOAD PF: 61	91	SQ CAGE INV RATED	5

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
29.8 LB-FT	69.6	50 LB-FT 168	85 LB-FT 285	70

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
62 dBA	72 dBA	1.2 LB-FT^2	85 LB-FT^2	25 SEC.	2	210 LBS.

### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	JM	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS PROTECTORS WDG RTDs		BRG RTDs				
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

DATE: 06/22/2017 07:41:45 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

