PRODUCT INFORMATION PACKET




Model No: 215TTFBA6003
Catalog No: GT1218
Johetrotter® General Purpose Motor, 10 & 7.50 HP, 3 Ph, 6

Globetrotter® General Purpose Motor, 10 & 7.50 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V,

3600 & 3000 RPM, 215TC Frame, TEFC









Nameplate Specifications

Phase	3	Output HP	10 & 7.50 Hp
Output KW	7.5 & 5.6 kW	Voltage	230/460 & 190/380 V
Speed	3540 & 2945 rpm	Service Factor	1.15 & 1.0
Frame	215TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	90.2 & 89.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	22.8/11.4 & 21/10.5 A	Power Factor	90
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	.685 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	т	Overall Length	21.02 in
Shaft Diameter	1.375 in	Shaft Extension	3.37 in
Assembly/Box Mounting	F1/F2 CAPABLE		
Outline Drawing	SS620297-215TC	Connection Drawing	A-EE7308

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023



FMF


PREV

SS620297

SIZE DRAWING NO. B SS6.

HWADA

-1/2"-13-UNC-2B

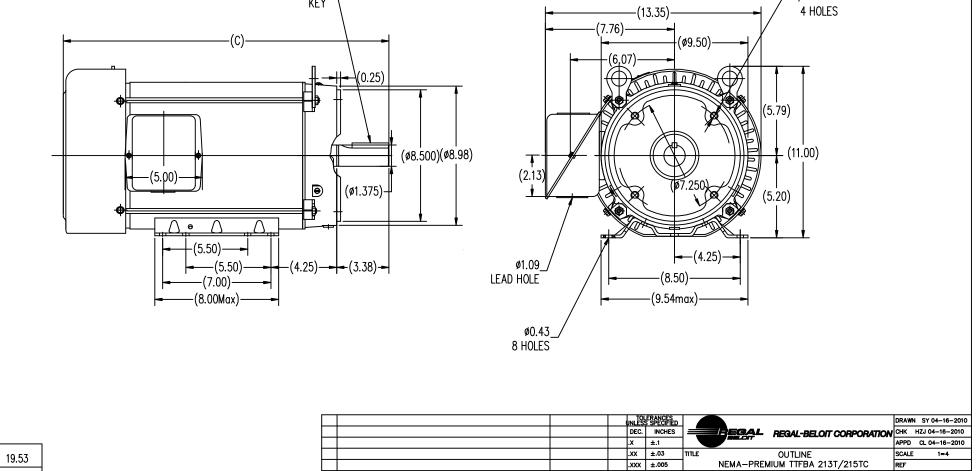

REVISION

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

5/16x5/16x2.38

KEY

213TC

215TC

FRAME

21.02

С

.xxxx ±.0005

CHK ANG ±1/2

RFP

DIST

MAT'L.

FINISH

CAD FILE

SS620297



CERTIFICATION DATA SHEET

 Model#:
 215TTFBA6003 AA
 WINDING#:
 CHT21520001 NONE 1

 CONN. DIAGRAM:
 A-EE7308
 ASSEMBLY:
 F1/F2 CAPABLE

OUTLINE: B-SS620297

N O

Т

Ε

S

380

10.5

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SY	NC. RPM	F.L. RPM	FRAME	ENCLOS	SURE KV	A CODE	DESIGN
10&7 1/2	7.50&	5.60	3600	3540&2945	215TC	TEF		Н	В
		,	,						
PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#190/	22 8/11 4&21/	ACROSS THE	CONTINUOU	F7	1.15/1.0	40	3300

FULL LOAD EFF: 90.2&89.5	3/4 LOAD EFF: 90.2	1/2 LOAD EFF: 88.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
EIII I I OAD BE: 00800	3/4 I OAD DE: 88	1/2 L OAD DE: 82	99.5	SO CAGE IND BLIN	66/33

LINE

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C	
14.9 LB-FT	162 / 81	30 LB-FT 200	48 LB-FT 322	50	

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
72 dBA	82 dBA	0.45 LB-FT^2	18 LB-FT^2	15 SEC.	2	205 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS PROTECTORS WDG RTDs		BRG RTDs				
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: NONE
INV. HP SPEED RANGE: NONE
ENCODER: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

DATE: 06/21/2017 10:01:05 AM

FORM 3531 REV.3 02/07/99
** Subject to change without notice.

