PRODUCT INFORMATION PACKET

Model No: 215TTFBA6028 Catalog No: GT1219 Globetrotter® General Purpose Motor, 10 & 7.50 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM, 215TC Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E







Product Information Packet: Model No: 215TTFBA6028, Catalog No:GT1219 Globetrotter® General Purpose Motor, 10 & 7.50 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM, 215TC Frame, TEFC

marathon®


Nameplate Specifications

Phase	3	Output HP	10 & 7.50 Hp
Output KW	7.5 & 5.6 kW	Voltage	230/460 & 190/380 V
Speed	1768 & 1472 rpm	Service Factor	1.15 & 1.0
Frame	215TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	91.7 & 91 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	25.6/12.8 & 24/12 A	Power Factor	79
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Y
CE	Y	IP Code	44
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.755 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	т	Overall Length	21.02 in
Shaft Diameter	1.375 in	Shaft Extension	3.37 in
Assembly/Box Mounting	F1/F2 CAPABLE		
Connection Drawing	A-EE7308	Outline Drawing	SS620297-215TC

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

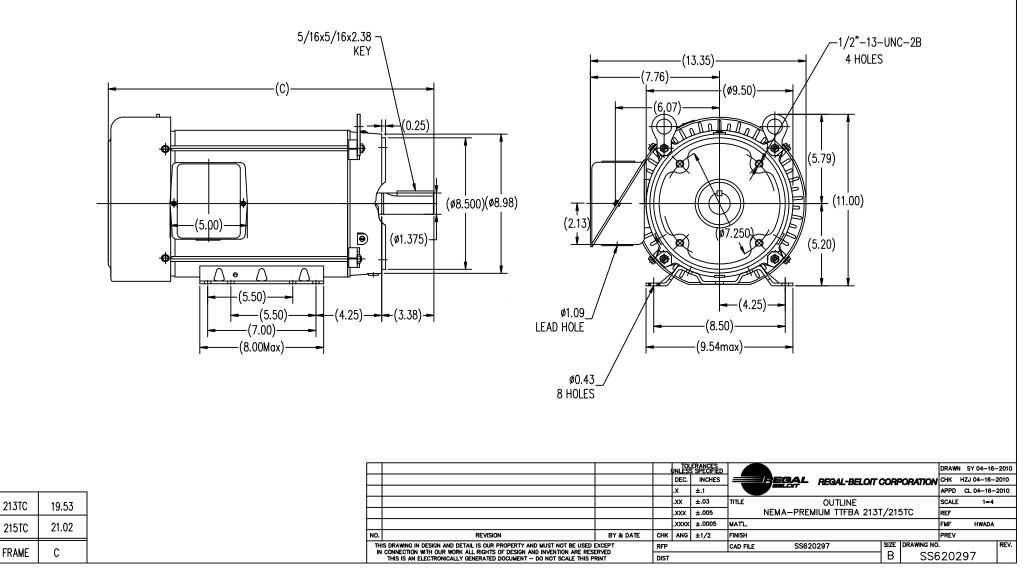

Uncontrolled Copy



CERTIFICATION DATA SHEET

Model#:	215TTFBA6028 BB	WINDING#:	CHT21540007 NONE 1
CONN. DIAGRAM:	A-EE7308	ASSEMBLY:	F1/F2 CAPABLE
OUTLINE:	B-SS620297		

TYPICAL MOTOR PERFORMANCE DATA

HP	ки	ı	SYNC. RPM	F.L. RPM	FRAME	ENCLOS	SURE	(VA CODE	DESIGN
10&7 1/2	7.50&	5.60	1800	1768&1472	215TC	TEF	c	G	В
РН	Hz	VOLTS	S FL AMP	S START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION

	60/50	380	25.6/12.8&24/	INVERTER	CONTINUOU		1.15/1.0	40	3300
FULL LOA		3/4 LOAD EFF: 9	1.7 1/2 LC	AD EFF: 91	GTD. E	FF	ELEC. TYPE	NO L	OAD AMPS

	FULL LOAD PF: 79&78	3/4 LOAD PF: 75	1/2 LOAD PF: 61		91		SQ CAGE INV RATED		12.4 / 6.2	
	F.L. TORQUE	LOCKED ROTOR		L.R. TO	DRQUE	В.	.D. TORQUE		F.L. RISE°C	

29.8 LB-FT	174 / 87	50 LB-FT 168	85 LB-FT 285	70
· · · · · · · · · · · · · · · · · · ·			1	

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
62 dBA	72 dBA	1.2 LB-FT^2	85 LB-FT^2	25 SEC.	2	210 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEAF	BEARINGS		SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	т	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs BRG RTDs				
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: CONSTANT 10:1							
INV. HP SPEED RANGE: NONE							
ENCODER: NONE							
NONE NONE							
NONE NONE PPR							
BRAKE: NONE	NONE						
NONE P/N NO	DNE						
NONE NONE							
NONE FT-LB NONE V NONE Hz							

DATE: 06/22/2017 07:47:03 AM

* NOTES

FORM 3531 REV.3 02/07/99

** Subject to change without notice.

Uncontrolled Copy

