PRODUCT INFORMATION PACKET



Model No: 215TTFBA6032
Catalog No: GT1419
10 HP General Purpose Motor, 3 phase, 1800 RPM, 575 V, 215TC Frame, TEFC
General Purpose Motors



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 215TTFBA6032, Catalog No:GT1419 10 HP General Purpose Motor, 3 phase, 1800 RPM, 575 V, 215TC Frame, TEFC



Nameplate Specifications

10 Hp	Output KW	7.5 kW
60 Hz	Voltage	575 V
9.8 A	Speed	1768 rpm
1.15	Phase	3
91.7 %	Power Factor	83.5
Continuous	Insulation Class	F
В	KVA Code	G
215TC	Enclosure	Totally Enclosed Fan Cooled
No	Ambient Temperature	40 °C
6307	Opp Drive End Bearing Size	6306
Recognized	CSA	Υ
Υ	IP Code	43
1		
	60 Hz 9.8 A 1.15 91.7 % Continuous B 215TC No 6307 Recognized	9.8 A Speed 1.15 Phase 91.7 % Power Factor Continuous Insulation Class B KVA Code 215TC Enclosure No Ambient Temperature 6307 Opp Drive End Bearing Size Recognized CSA

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.755 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Overall Length	21.02 in
Shaft Diameter	1.375 in	Shaft Extension	3.38 in
Assembly/Box Mounting	F1/F2 CAPABLE		
Outline Drawing	SS620297-215TC	Connection Drawing	EE7300

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/12/2021



FMF


PREV

SS620297

SIZE DRAWING NO. B SS6.

HWADA

-1/2"-13-UNC-2B

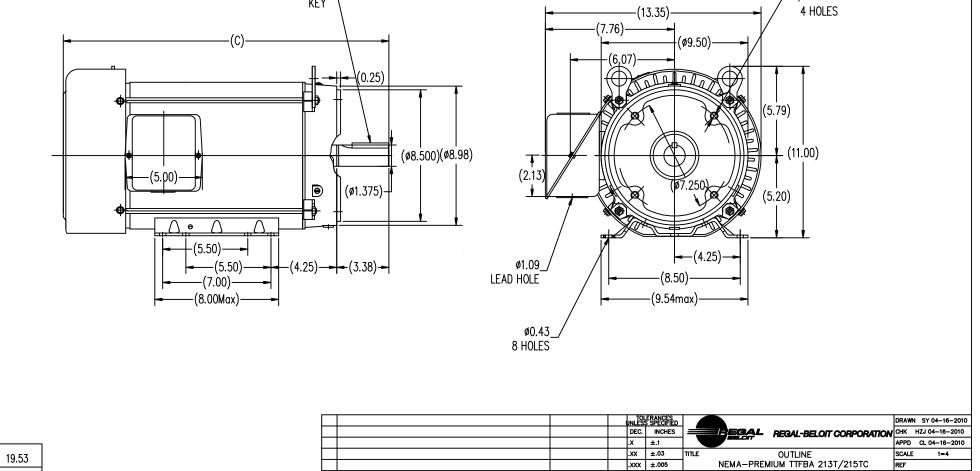

REVISION

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

5/16x5/16x2.38

KEY

213TC

215TC

FRAME

21.02

С

.xxxx ±.0005

CHK ANG ±1/2

RFP

DIST

MAT'L.

FINISH

CAD FILE

SS620297



CERTIFICATION DATA SHEET

215TTFBA6032 AA WINDING#: CHT21540001 NONE 3 Model#: CONN. DIAGRAM: EE7300 ASSEMBLY: F1/F2 CAPABLE

OUTLINE: SS620297

Ν

0

Т

Ε

S

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SY	NC. RPM	F.L. RPM	FRAME	ENCLOS	SURE	(VA CODE	DESIGN
10	7.50)	1800	1768	215TC	TEF	С	G	В
PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60	575	9.8	LINE OR	CONTINUOU	F7	1.15	40	3300
				INVERTER	S				

FULL LOAD EFF: 91.7	3/4 LOAD EFF: 91.7	1/2 LOAD EFF: 91	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 83.5	3/4 LOAD PF: 80	1/2 LOAD PF: 72	91	SQ CAGE INV RATED	3.6

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
29.7 LB-FT	64.8	50 LB-FT 168	78 LB-FT 262	55

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
62 dBA	72 dBA	1.3 LB-FT^2	85 LB-FT^2	25 SEC.	2	225 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	BRAKE	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6306					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS PROTECTORS WDG RTDs		BRG RTDs				
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: CONSTANT 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

DATE: 06/22/2017 07:48:11 AM FORM 3531 REV.3 02/07/99

