# PRODUCT INFORMATION PACKET



Model No: 215TTFBA6078
Catalog No: GT1214
Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1200 & 1000 RPM, 215TC Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 215TTFBA6078, Catalog No:GT1214 Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1200 & 1000 RPM, 215TC Frame, TEFC



## Nameplate Specifications

Phase	3	Output HP	5 & 3 Hp
Output KW	3.7 & 2.2 kW	Voltage	230/460 & 190/380 V
Speed	1182 & 985 rpm	Service Factor	1.15 & 1.0
Frame	215TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	89.5 & 89.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	14/7 & 11/5.5 A	Power Factor	73
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6206
UL	Recognized		Υ
CE	Υ	IP Code	43
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	1.625 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Overall Length	21.02 in
Shaft Diameter	1.375 in	Shaft Extension	3.37 in
Assembly/Box Mounting	F1/F2 CAPABLE		
Outline Drawing	SS620297-215TC	Connection Drawing	A-EE7308

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023



FMF


PREV

SS620297

SIZE DRAWING NO. B SS6.

HWADA

-1/2"-13-UNC-2B

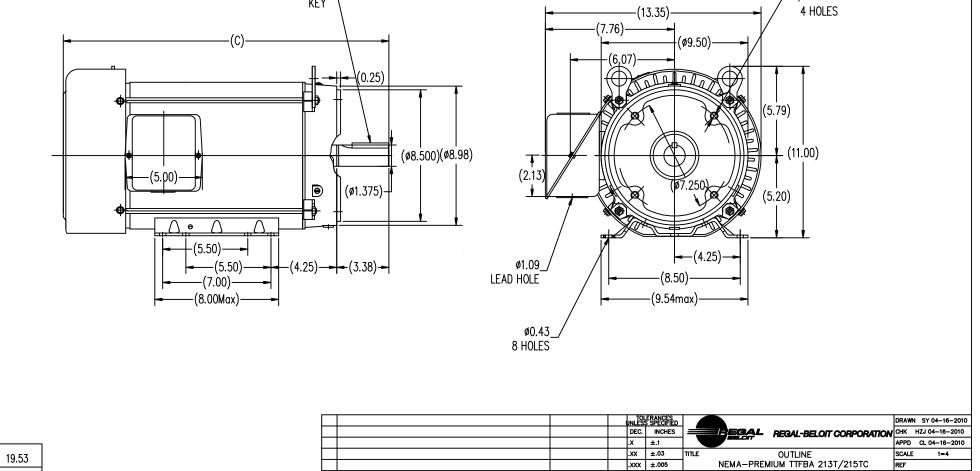

REVISION

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

5/16x5/16x2.38

KEY

213TC

215TC

FRAME

21.02

С

.xxxx ±.0005

CHK ANG ±1/2

RFP

DIST

MAT'L.

FINISH

CAD FILE

SS620297



#### **CERTIFICATION DATA SHEET**

 Model#:
 215TTFBA6078 AA
 WINDING#:
 CHT21560001 NONE 1

 CONN. DIAGRAM:
 A-EE7308
 ASSEMBLY:
 F1/F2 CAPABLE

OUTLINE: B-SS620297

#### TYPICAL MOTOR PERFORMANCE DATA

HP	KW	s	YNC. RPM	F.L. RPM	FRAME	ENCLO	SURE	KVA COI	DE	DESIGN
5&3	3.70&2	2.24	1200	1182&985	215TC	TE	FC	Н		В
PH	Hz	VOLTS	FL AMP	S START TYPE	DUTY	INSL	S	.F A	AMB°C	ELEVATION

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#190/	14/7&11/5.5	LINE OR	CONTINUOU	F7	1.15/1.0	40	3300
		380		INVERTER	S				

FULL LOAD EFF: 89.5&89.5	3/4 LOAD EFF: 89.5	1/2 LOAD EFF: 88.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 75&69	3/4 LOAD PF: 67	1/2 LOAD PF: 56	88.5	SQ CAGE INV RATED	7 / 3.5

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
22.2 LB-FT	102 / 51	45 LB-FT 202	75 LB-FT 335	50

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
55 dBA	65 dBA	1.5 LB-FT^2	110 LB-FT^2	25 SEC.	2	265 LBS.

### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	1045 HOT	ROLLED STEEL
6307	6206					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS PROTECTORS WDG RTDs BRG RT		BRG RTDs				
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: CONSTANT 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

\*
NOTES

DATE: 06/22/2017 07:48:36 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

