PRODUCT INFORMATION PACKET



Model No: 215TTFBD6075
Catalog No: GT12314
Inhetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60

Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V,

1200 & 1000 RPM, 215TC Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 215TTFBD6075, Catalog No:GT12314 Globetrotter® General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1200 & 1000 RPM, 215TC Frame, TEFC




Nameplate Specifications

3.7 & 2.2 kW	Voltage	230/460 & 190/380 V		
1180 & 985 rpm	Service Factor	1.15 & 1.15		
215TC	Enclosure	Totally Enclosed Fan Cooled		
No Protection	Efficiency	89.5 & 89 %		
40 °C	Frequency	60 & 50 Hz		
13.6/6.8 & 10.6/5.3 A	Power Factor	77.5		
Continuous	Insulation Class	F		
В	KVA Code	J		
6307	Opp Drive End Bearing Size	6206		
Listed	CSA	Υ		
Υ	IP Code	43		
1	Hazardous Location	DIVISION 2 T2B		
	1180 & 985 rpm 215TC No Protection 40 °C 13.6/6.8 & 10.6/5.3 A Continuous B 6307 Listed	1180 & 985 rpm Service Factor Enclosure No Protection Efficiency 40 °C Frequency 13.6/6.8 & 10.6/5.3 A Power Factor Continuous Insulation Class KVA Code 6307 Opp Drive End Bearing Size Listed CSA Y IP Code		

Technical Specifications


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	2.656 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Shaft Diameter	1.375 in
Assembly/Box Mounting	F3	Inverter Load	CONSTANT 10:1/VARIABLE 10:1
Outline Drawing	SS621036-200	Connection Drawing	EE7308


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

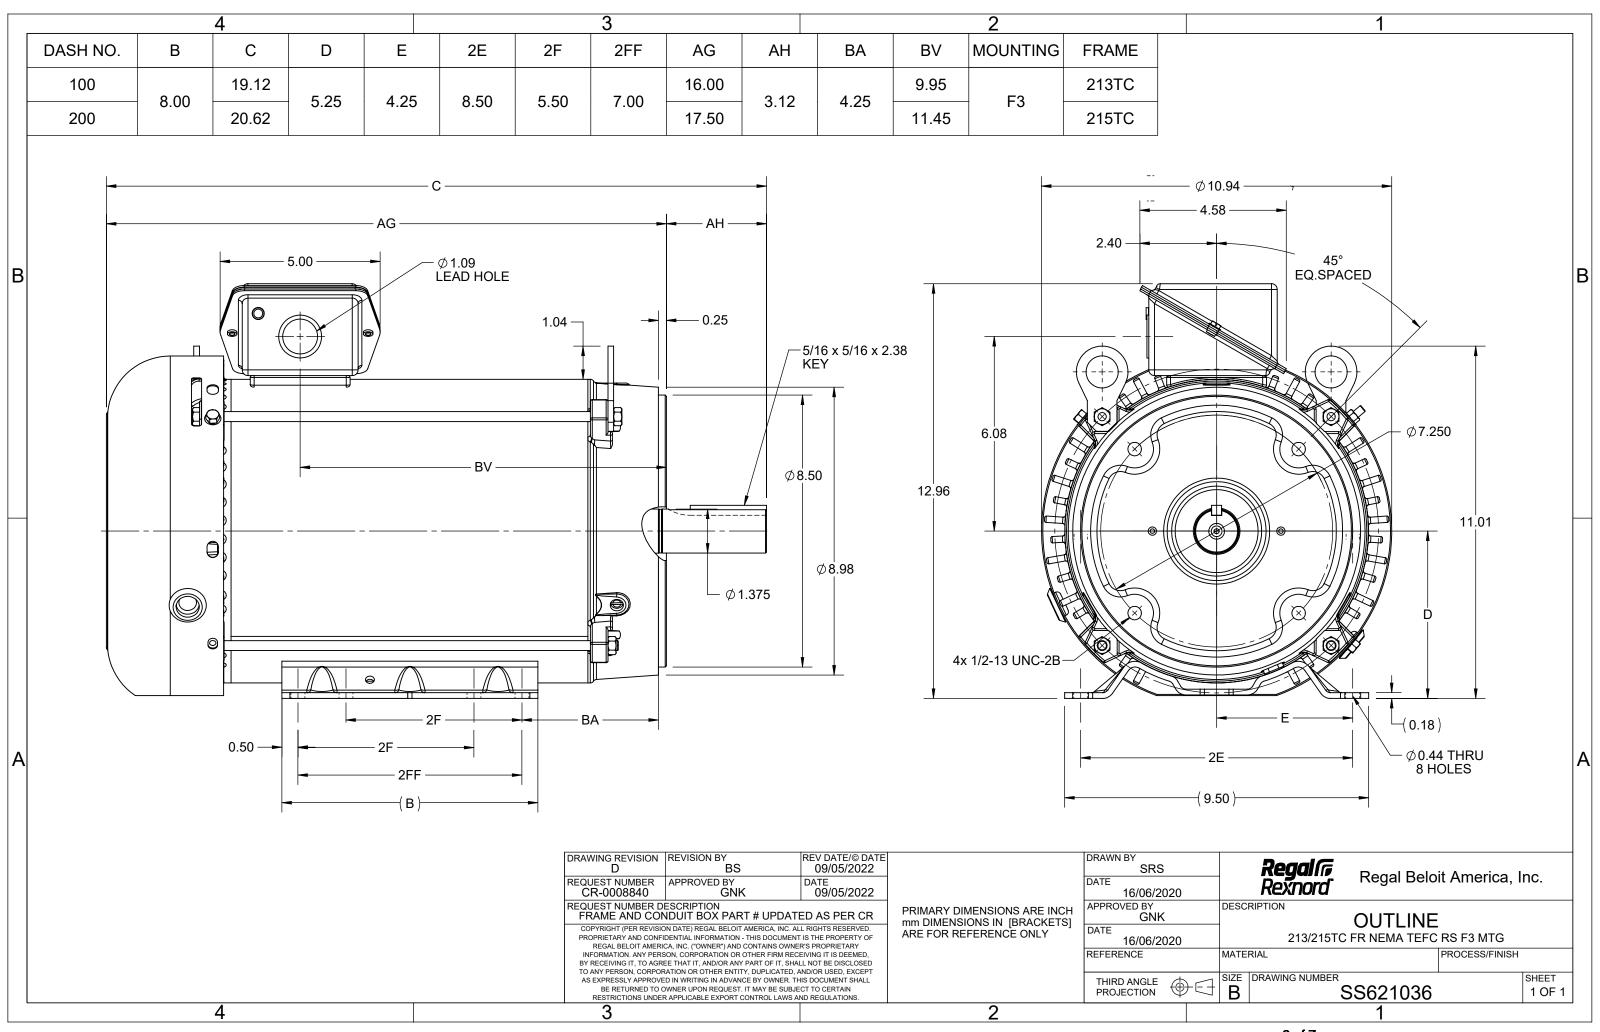



									P.O. BOX				
					WAUSAU, WI 54401-8003								
marathon®								PH. 715-6	75-3311				
						Motors		DAT	A VOLTS:	460			
								DAI	A VOLIS:	400			
	CERTIFICATION DATA SHEET												
сиѕтом	ER:						CUSTO	MER P.O. #:					
ORDER #	t:			<u> </u>			REFERENCE MODEL #:		#: 215TTFBD6075				
CONN. D		EE7308					CAT #:						
OUTLINE		SS621036-200		_				IER PART #:					
WINDING SPEED:	:	HA31326015	NONE	2				MOUNTING:	F3				
SFEED.				T	YPICAI	MOTOR PERFORMA	NCE D	ΔΤΔ					
HP	KW	SYNC RPM	FL	. RPM		FRAME	ENCLOSURE		TYPE	KVA CODE		DESIGN	
5	3.7	1200	1	1180		215TC	Т	EFC	TFB	J		В	
	•	•											
PH	HZ	VOLTS		MPS		START TYPE		UTY	INSL	S.F.	AMB	ELEV.	
3	60/50	230/460#190/380		8&10.6/5.3		LINE OR INVERTER		ONT	F	1.15	40	3300	
	F.L. EFF		3/4 LD EFF			1/2 LD EFF	89.0	GTD EFF		ELECT.			
	F.L. PF	77.5	3/4 LD PF	72.0		1/2 LD PF	61.0	88.5		SQ CAGE IN	NV RATED		
										_			
	L. TORQUE LB-FT	LR AMPS @ 48.0	460 V	41.0 I	L.R. TORQUE 41.0 LB-FT 184%			B.D. TORQU LB-FT	E 280%	F.L. RISE (° C) % 50			
22.3	LD-F1	40.0		41.0 I	LD-FI	10476	02.5	LD-FI	200%	50			
SOUND	PRESSURE @ 3												
	FT.	SOUND POWER ROTOR WK ²				MAX. LOAD WK ²	SAFE STALL TIME		STARTS/HOUR		APROX.	MOTOR WGT	
55	55 dBA 64 dBA 1.05 LB-FT ²		LB-FT ²	100	LB-FT ²	25 SEC .			2	225	LB.		
					*** 61	IPPLEMENTAL INFORMA	TION ***						
			MOUNT		St	PPLEMENTAL INFORMA		RDOUS	DRIP		T		
DE BE	RACKET TYPE	ODE BRACKET TYPE	TYPE	MOTOR ORIEN	NOITATION	SEVERE DUTY	LOCATION		COVER SCREENS		PAINT		
	C-FACE	STANDARD	RIGID	HORIZON	ONTAL NO		DIVISION 2 T2B		YES NONE		BLUE (ENAMEL)		
	BEARINGS	GREASE	SHAI	FT TYPE		SPECIAL DE	SPECIAL ODE		SHAFT MATERIAL		FRAME MATERIAL		
DE BALL	ODE BALL												
6307	6206	POLYREX EM		Т		NONE	NONE 1045 HOT ROLLED (C-204) ROLLED			OLLED STEEL			
		'											
											SPAC	E HEATERS	
THE	THERMOSTATS PROTE			DG RTD's BRG RTD's		THERMISTORS		CONTROL		-			
	NONE	NOT	l N	NONE NONE		NONE		FALSE			NA		
R1	R1 (ohms/ph) R2 (ohms/ph) X1 (o		X1 (n	hms/ph)	ns/ph) X2 (ohms/ph)		Xm (ohms/ph)		V	VIBRATION (in/sec)		FLOAT	
	1.613	0.744		4.834 6.748		78.838		0.150		ODE			
		·											
*													
N							INVERTER TORQUE: CONSTANT 10:1/VARIABLE 10:1 INV. HP SPEED RANGE: NONE						
O T							IN	IV. HP SPEE	D KANGE:	INOINE			
Ė								ENCODER:	NONF				
s							NONE						
					NONE NONE PPR				PPR				
				BRAKE: NONE									
	PREPARED BY:				NONE NONE								
I	DATE:	10/29/2021						FT-LB:		NA			
FORM: 3531 REV 4 2/27/06					VOLTAGE: NONE HZ: UL: NO LETTER - ME,WUXI TEFC BLUEWHALE CLASS 1 DIV. 2 UL LISTED								
FORM: 3	531 REV_4	2/27/06					UL:	NOTELLER	- ME,WUXI	TERC BLUEWHALE CLASS	DIV. 2 UL	LIGITED	

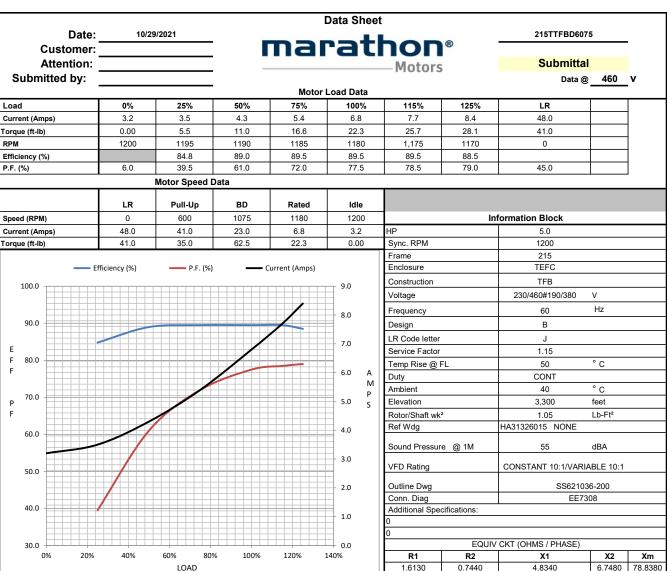

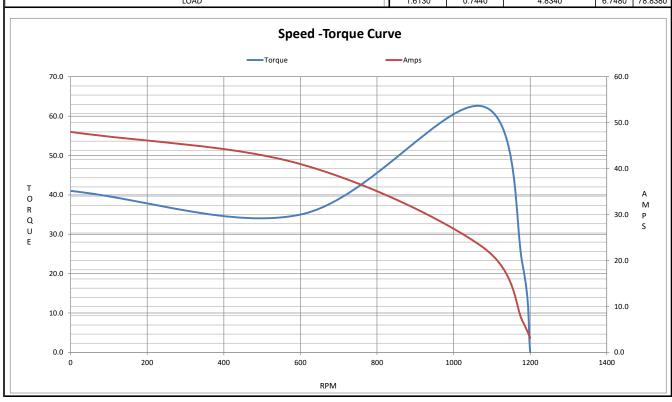



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 215TTFBD6075

(Model No. may contain prefix and/or suffix characters)

Catalog No: GT12314

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Authorized Representative in the Community:

J. cers

Julian Clark

Michael A. Logsdon Vice President, Technology

gy Marketing Engineer

Created on 09/01/2022

C € 22