

PRODUCT INFORMATION PACKET











Product Information Packet: Model No: 215TTFW14301, Catalog No:U357 Close-Coupled Pump Motor, 15 & 10 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 3600 & 3000 RPM, 215JM Frame, TEFC

marathon®


Nameplate Specifications

Voltage rpm Service Factor	230/460 & 190/380 V 1.15 & 1.15
rpm Service Factor	1.15 & 1.15
Enclosure	Totally Enclosed Fan Cooled
Efficiency	90.2 & 89.5 %
Frequency	60 & 50 Hz
5 A Power Factor	87
Insulation Class	F
KVA Code	G
Opp Drive End Bearing Size	6206
CSA	Y
IP Code	43
	h Efficiency Frequency 5 A Power Factor Insulation Class KVA Code Opp Drive End Bearing Size CSA

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	.6 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JM	Overall Length	22.09 in
Frame Length	11.15 in	Shaft Diameter	0.875 in
Shaft Extension	4.28 in	Assembly/Box Mounting	F1/F2 Capable
Connection Drawing	A-EE7308	Outline Drawing	SS86629-1115

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

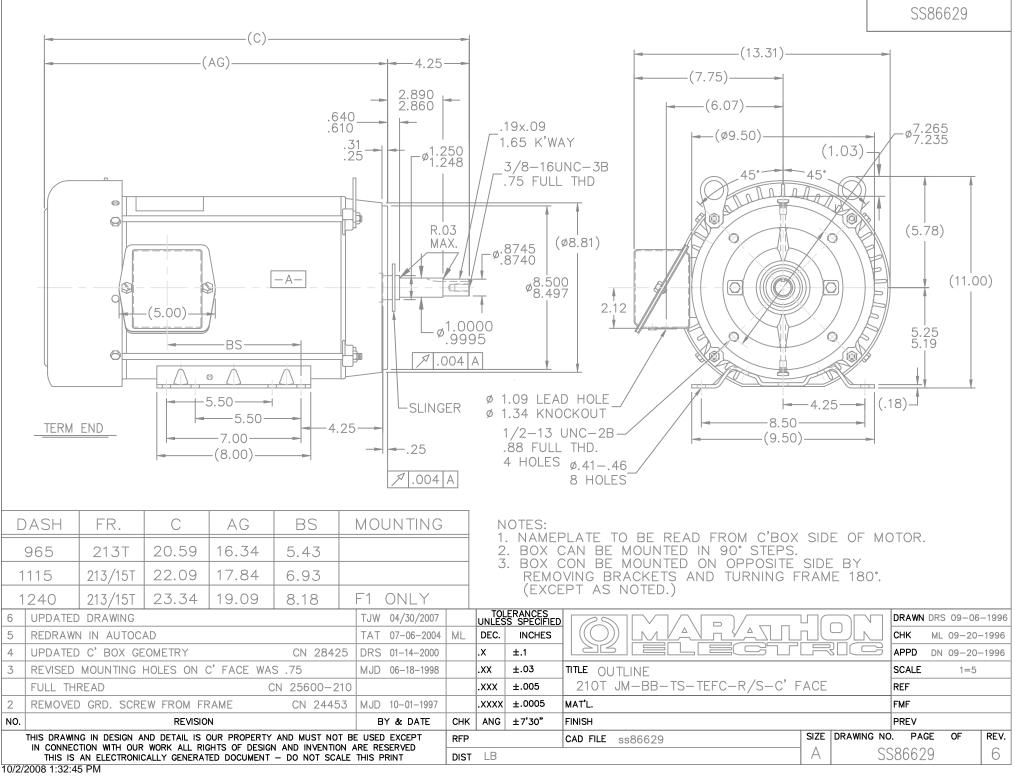

Uncontrolled Copy

