PRODUCT INFORMATION PACKET

Model No: 215TTFW7303
Catalog No: M411
Other Purpose Motor, 10 & 7.50 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V, 3600 & 3000 RPM, 215JM Frame, TEFC

Nameplate Specifications

Phase	3	Output HP	10 & 7.50 Hp
Output KW	7.5 & 5.6 kW	Voltage	208-230/460 & 190/380 V
Speed	3456 & 2880 rpm	Service Factor	1.15 & 1.15
Frame	215JM	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	86.5 & 84 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	27-24/12 & 22/11 A	Power Factor	91
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	H
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Y
CE	Y	IP Code	43
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	1.33 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JM	Overall Length	22.09 in
Frame Length	11.15 in	Shaft Diameter	0.875 in
Shaft Extension	4.25 in	Assembly/Box Mounting	F1/F2 CAPABLE
Connection Drawing	A-EE7308	Outline Drawing	A-SS86629-1115

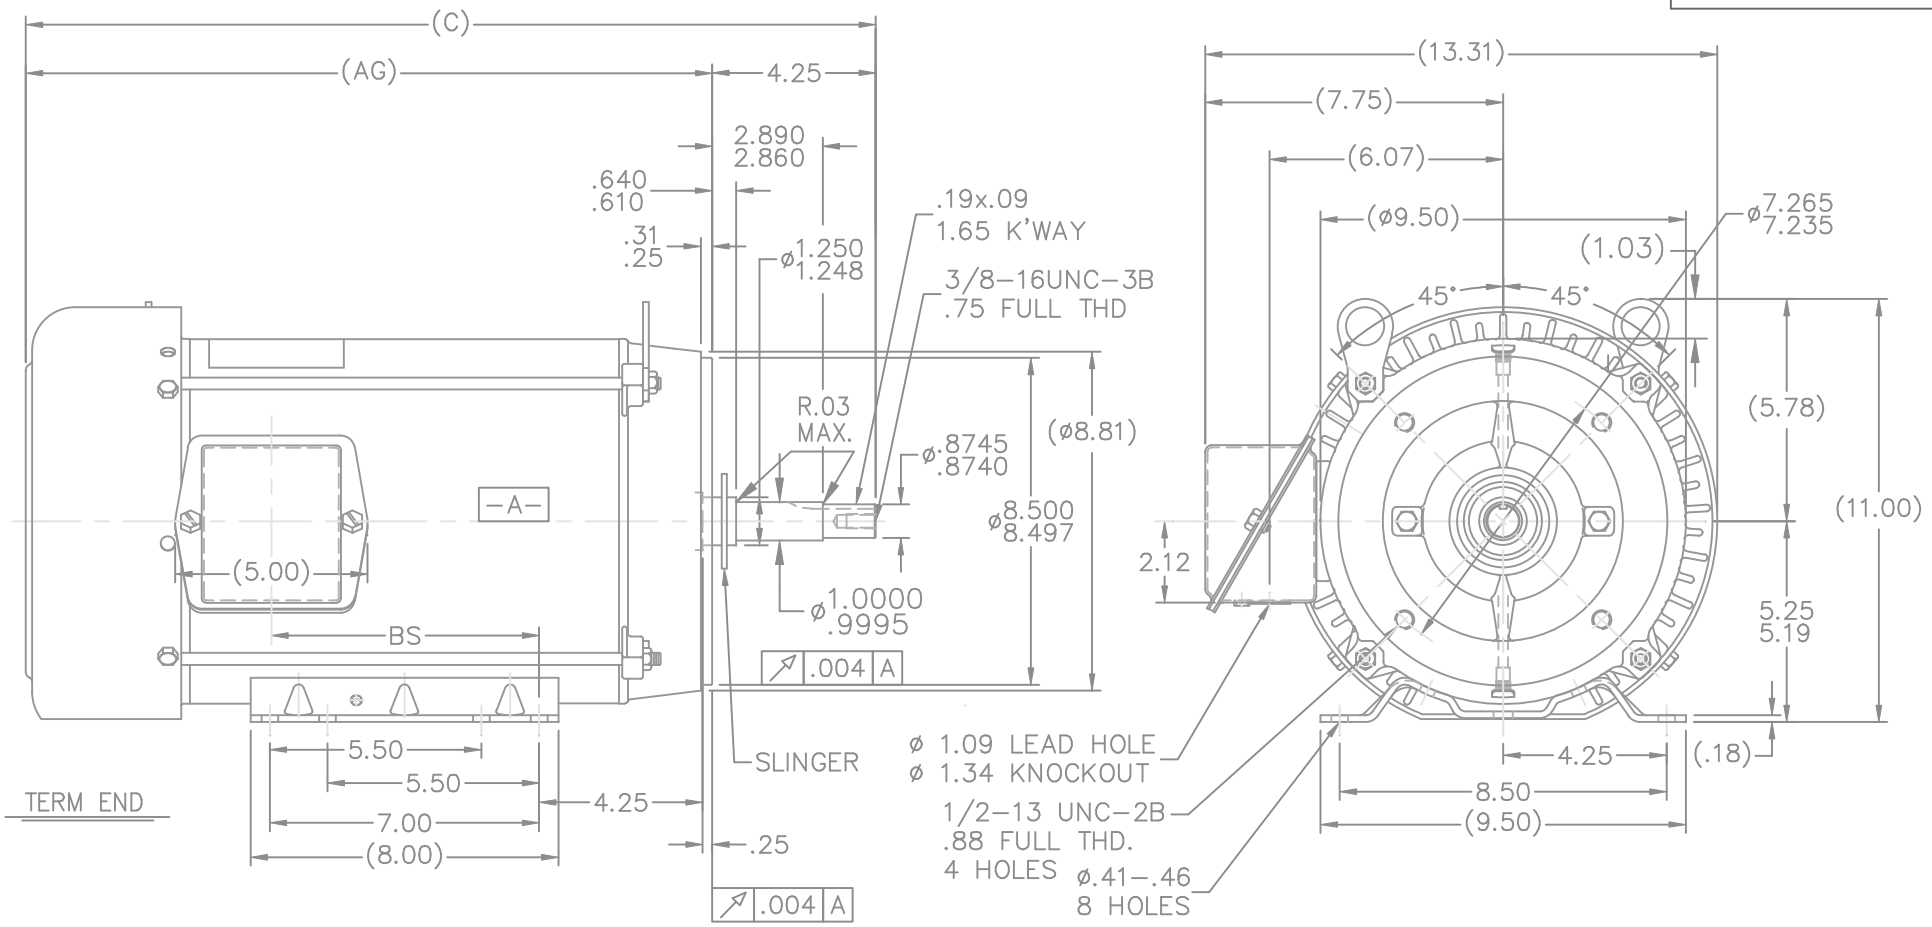

DASH	FR.	C	AG	BS	MOUNTING
965	213T	20.59	16.34	5.43	
1115	213/15T	22.09	17.84	6.93	
1240	213/15T	23.34	19.09	8.18	F1 ONLY

NOTES:
1. NAMEPLATE TO BE READ FROM C'BOX SIDE OF MOTOR.
2. BOX CAN BE MOUNTED IN 90° STEPS.
3. BOX CON BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°. (EXCEPT AS NOTED.)

NO.	REVISION	BY & DATE	CHK
6	UPDATED DRAWING	TJW 04/30/2007	
5	REDRAWN IN AUTOCAD	TAT 07-06-2004	ML
4	UPDATED C' BOX GEOMETRY CN 28425	DRS 01-14-2000	
3	REVISED MOUNTING HOLES ON C' FACE WAS .75	MJD 06-18-1998	
	FULL THREAD CN 25600-210		
2	REMOVED GRD. SCREW FROM FRAME CN 24453	MJD 10-01-1997	

TOLERANCES UNLESS SPECIFIED

DEC.	INCHES
.X	±.1
.XX	±.03
.XXX	±.005
.XXXX	±.0005
ANG	±7'30"

MARATHON ELECTRIC

TITLE OUTLINE
210T JM-BB-TS-TEFC-R/S-C' FACE

MAT'L.
FINISH
CAD FILE ss86629
RFP
DIST LB

DRAWN	DRS 09-06-1996
CHK	ML 09-20-1996
APPD	DN 09-20-1996
SCALE	1=5
REF	
FMF	
PREV	

SIZE	DRAWING NO. PAGE OF	REV.
A	SS86629	6

10/2/2008 1:32:45 PM

EE7308

THREE PHASE
DUAL VOLTAGE MOTOR

HIGH VOLTAGE

(U1) T1 — L1
(V1) T2 — L2
(W1) T3 — L3
(U2) T4
(U3) T7
(V2) T5
(V3) T8
(W2) T6
(W3) T9

LOW VOLTAGE

(U1) T1
(U3) T7 — L1
(V1) T2
(V3) T8 — L2
(W1) T3
(W3) T9 — L3
(U2) T4
(V2) T5
(W2) T6

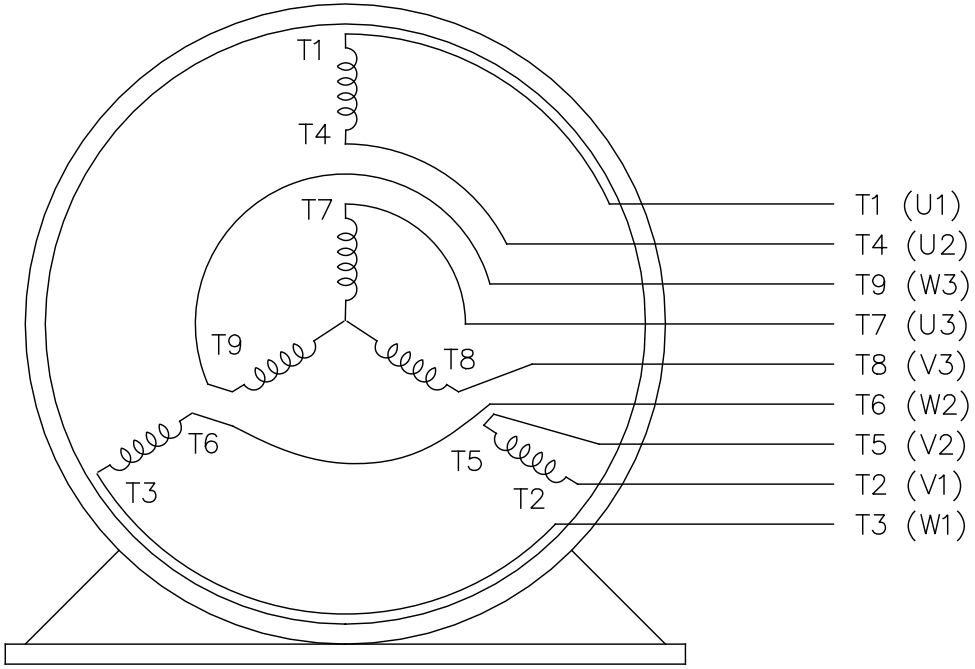

VIEW OF TERMINAL END

REF.
WINDING DIAGRAM

T8Y, T2Y, T2BL, T4BX, T2EC, T2G
T6BZ, T2B, T6BL, T4AV, T6B, T4B

OPTIONAL CORD CONNECTION

L1 — WHITE
L2 — RED
L3 — BLACK

NO.	REVISION	BY & DATE	CHK
5	CHG TO REGAL LOGO	SL 09/10/2015	AB
4	REVISED IEC NOTATIONS	MSG 11/15/2011	CMN
3	ADDED IEC NOTATIONS... (U1), (V1) ETC. MU95194	MSG 5/10/2010	MJS
2	ADDED THE OPTIONAL CORD CONNECTION MU46318	RDH 04/24/2003	DRS
1	REDRAWN	RM 11/20/1990	

TOLERANCES UNLESS SPECIFIED

DEC.	INCHES
.X	±.1
.XX	±.02
.XXX	±.005
.XXXX	±.0005
ANG	±7'30"

Regal Beloit America, Inc.

TITLE CONNECTION DIAGRAM
3ø – DUAL VOLTAGE MOTOR

MAT'L.
FINISH
CAD FILE ee7308
RFP
DIST WP

DRAWN RM	11/20/1990
CHK ML	11/21/1990
APPD SAS	04/24/2003
SCALE	1=1
REF	
FMF	
PREV	

SIZE A | DRAWING NO. EE7308 | PAGE OF | REV. 5