## PRODUCT INFORMATION PACKET



Model No: 215TTFWD16079

Catalog No: C388B

XRI® General Purpose General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V,

1200 & 1000 RPM, 215TC Frame, TEFC





Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E Product Information Packet: Model No: 215TTFWD16079, Catalog No:C388B XRI® General Purpose General Purpose Motor, 5 & 3 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V, 1200 & 1000 RPM, 215TC Frame, TEFC




## Nameplate Specifications

3	Output HP	5 & 3 Hp		
3.7 & 2.2 kW	Voltage	208-230/460 & 190/380 V		
1170 & 980 rpm	Service Factor	1.15 & 1.15		
215TC	Enclosure	Totally Enclosed Fan Cooled		
No Protection	Efficiency	89.5 & 89 %		
40 °C	Frequency	60 & 50 Hz		
14.8-14/7 & 12/6 A	Power Factor	75		
Continuous	Insulation Class	F		
Α	KVA Code	J		
6309	Opp Drive End Bearing Size	6206		
Recognized	CSA	Υ		
Υ	IP Code	43		
1				
	3.7 & 2.2 kW  1170 & 980 rpm  215TC  No Protection  40 °C  14.8-14/7 & 12/6 A  Continuous  A  6309  Recognized	3.7 & 2.2 kW  1170 & 980 rpm  Service Factor  215TC  Enclosure  No Protection  Efficiency  40 °C  Frequency  14.8-14/7 & 12/6 A  Power Factor  Continuous  Insulation Class  A  KVA Code  6309  Opp Drive End Bearing Size  Recognized  CSA		

## **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	6	Rotation	Reversible
Resistance Main	1.76 Ohms	Mounting	Bolt-on Base
Motor Orientation	Horizontal Or Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Overall Length	19.47 in
Frame Length	11.15 in	Shaft Diameter	1.375 in
Shaft Extension	3.12 in	Assembly/Box Mounting	F1 ONLY
Outline Drawing	SS88652-1115	Connection Drawing	005010.01


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

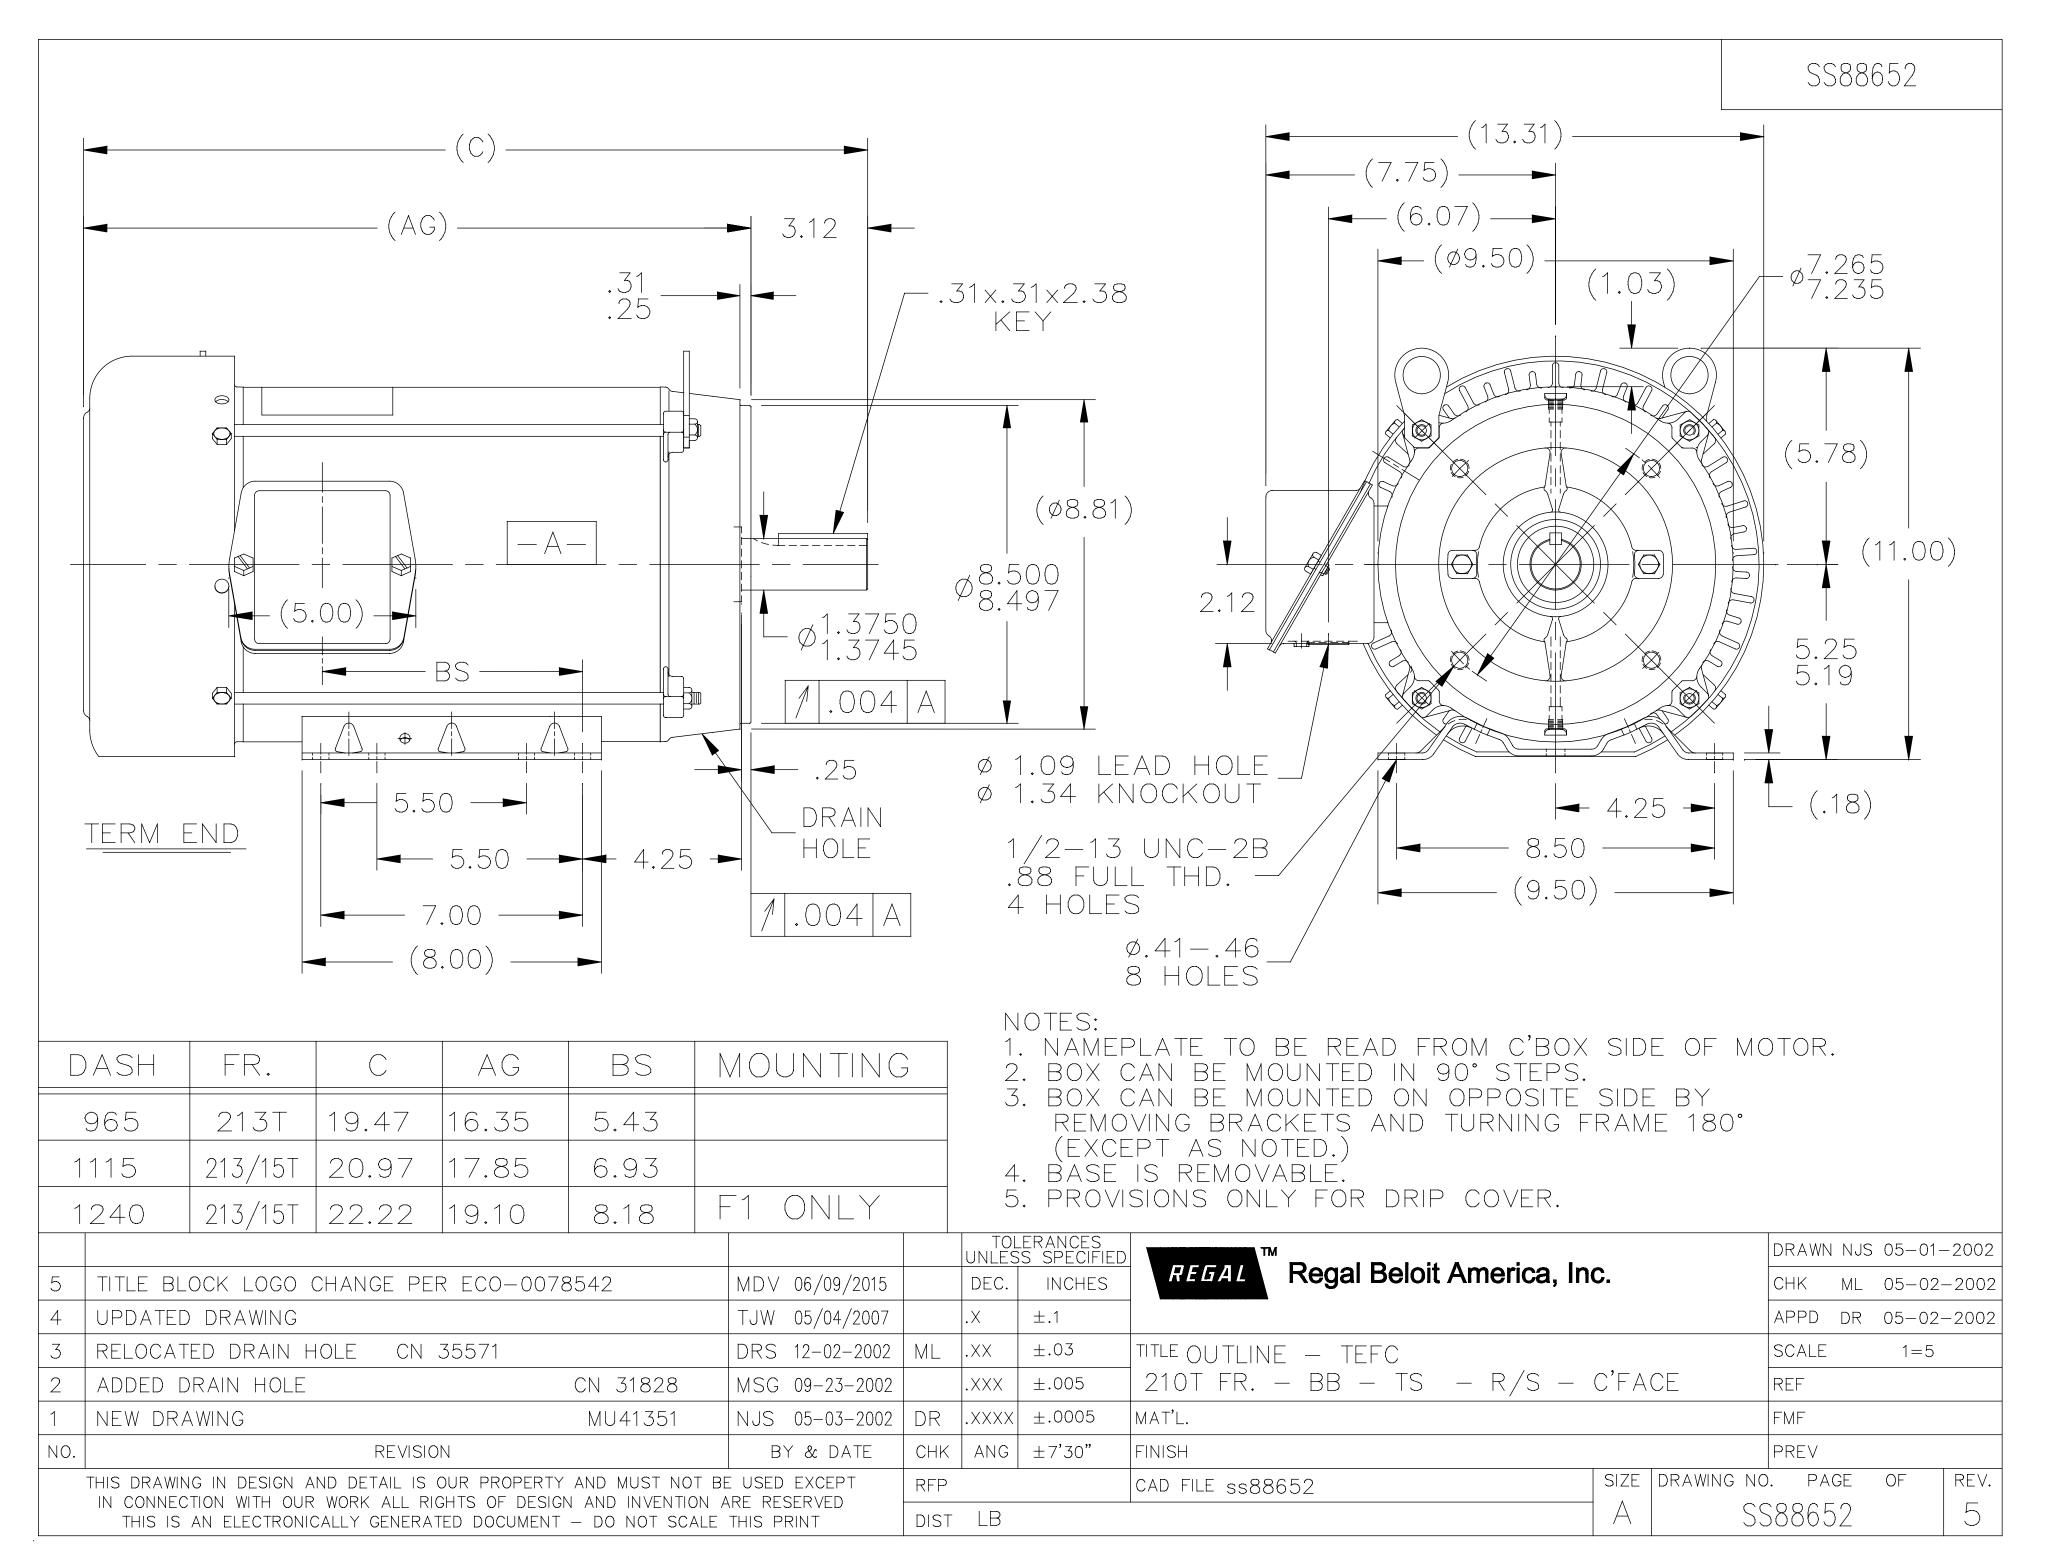


# Uncontrolled Copy



							ratho electi	ric	ET	P.O. BOX 80 WAUSAU, W PH. 715-675	I 54401-8003	460	
сиѕтом	ER:							CUSTO	MER P.O. #:				
ORDER#							R			215TTFWD16	6079		=
CONN. DI		005010.01						CAT #: C388A					
OUTLINE		SS88652-							IER PART #:	E. 01111			
WINDING: SPEED:			K2156185	NONE	2				MOUNTING:	F1 ONLY			
SFEED.		_		т	YPICAL	мото	R PERFO	RMANC	E DATA				
НР	KW	SYNC RPM FL RPM			FRAME ENCLOSURE		TYPE	KVA CODE D		DESIGN			
5	3.7	1:	200	117	70		215TC	TEFC		TFW	J		В
	0			1		21310			12.0				
PH	HZ	VO	LTS	AMI	PS	STA	RT TYPE	D	UTY	INSL	S.F.	AMB	ELEV.
3	60/50	208-230/4	60#190/380	14.8-14/	7&12/6	ACROS	SS THE LINE	С	ONT	F	1.15	40	3300
	F.L. EFF	89.5	1	3/4 LD EFF	90.1	1	1/2 LD EFF	89.0	GTD EFF		ELECT. TY	/PE	
	F.L. PF			3/4 LD PF	68.5		1/2 LD PF	57.3	87.5		SQ CAGE IND		
			1	-		1				I			
F.L. T	ORQUE	LI	R AMPS @	460 V		L.R. TOR	L.R. TORQUE		B.D. TORQ		UE F.L. RISE		
22.5	LB-FT		46.0		45.6 <b>LB-FT</b> 203%		68.2	LB-FT	303%	55			
	3 FT.		WER	ROTOF	LB-FT <sup>2</sup>	<b>MAX.</b>	LOAD WK <sup>2</sup>	SAFE STALL TIME		STARTS/HOUR			R WGT
55	dBA	64	dBA	1.00	LB-F1*	80	LB-F1*	25	SEC.		2	140	LB.
					*** SL	JPPLEMI	ENTAL INFO	RMATIO	N ***				
			RACKET	T MOUNT MOT		TOR SEVERE		HAZARDOUS		DRIP			
	ACE		YPE NDARD	BOLT-ON		TATION	DUTY NO		ONE	YES	SCREENS NONE	PAINT BLUE (ENAMEL)	
U-F	ACE	STAN	NDARD	BOLT-ON	ZONTAL	JR SHAFT	ų NO	IN	ONE	169	NONE	BLUE (I	ENAMEL)
BEA	RINGS	0.00	F 4 0 F	SHAFT TYPE						CHAFT	MATERIAL	FDAME	MATERIAL
DE	ODE	GRI	EASE	SHAFT	TYPE	SPE	CIAL DE	SPECIAL ODE		SHAFT	MATERIAL	FRAME	MATERIAL
BALL	BALL	POLYI	REX EM	Т		1	NONE	NONE		1045 HOT ROLLED (C-204)		ROLLED STEEL	
6206	6206 6309												
												SP	ACE
THERMOSTATS		PROTECTORS WDG RTD's		BRG RTD's		THERMISTORS		CONTROL		HEATERS			
NO	NONE		NOT NONE		ΝE	NONE		NONE		FALSE		NA	
R1 (ohms/ph) R2 (ohms/ph)		V1 (ahma/nh) V0 (ahm		a la ma a /m la \	Vm (ahma/nh)		VIDDATION (in/ccc)		FLOAT				
R1 (ohms/ph) 11.136			055	X1 (ohms/ph) 4.731		X2 (ohms/ph) 5.264		Xm (ohms/ph) 72.267		VIBRATION (in/sec) 0.150		ODE	
· · · ·	.100		000	7.7	<u> </u>	1	0.204	,,					
*													
N										ER TORQUE:			
	0								INV. HP SP	EED RANGE:	NONE		
T								THE PARTY NAME					
E							ENCODER: NONE NONE						
S						NONE NONE PPR				PPR			
					BRAKE: NONE								
PREF	PREPARED BY: FAREEDA DUDEKULA				NONE NONE								
DATE: 8/29/2018				FT-LB: NA									
EOD! 4 **	F04 DEV. :	0/07/00						VOLTAGE: NONE HZ:					
FORM: 3531 REV_4 2/27/06							UL: V-INS, CONST UL REC						

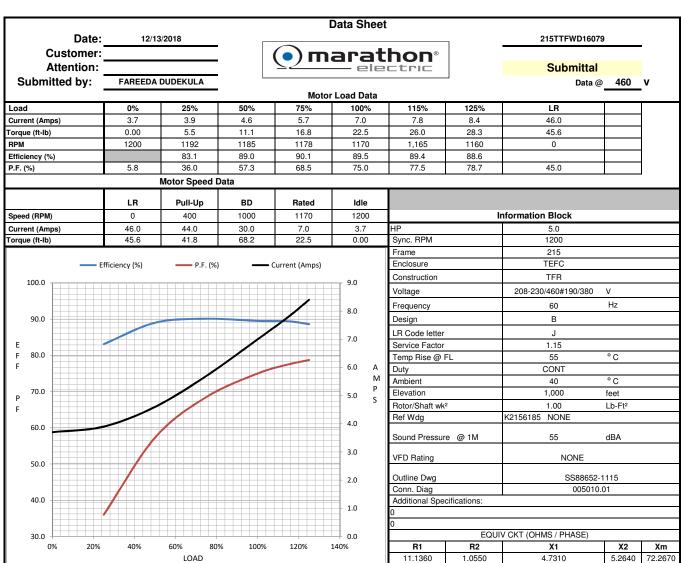

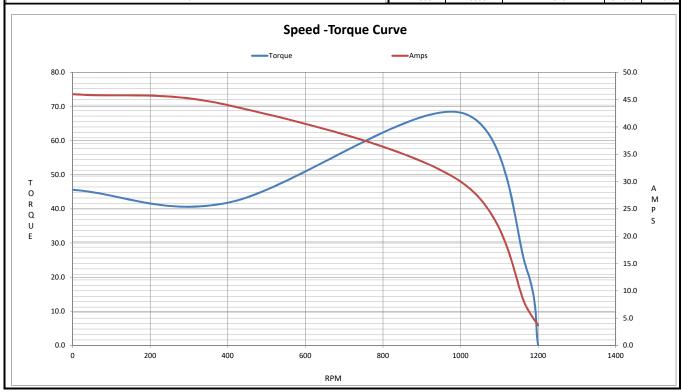



# **EC Declaration of Conformity**

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401

and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 215TTFWD16079

(Model No. may contain prefix and/or suffix characters)

Catalog No: C388B

Rework No: N/A

#### Directives:

Low Voltage Directive 2014/35/EU

### Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Authorized Representative in the Community: J. cerse

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

**C**€ 22