PRODUCT INFORMATION PACKET



Model No: 225STFC4543 Catalog No: 225STFC4543 50,1800,TEFC,225S,3/60/230/460 PWS/YD






Nameplate Specifications

Phase	3	Output HP	50 Hp
Output KW	37.0 kW	Voltage	230/460 V
Speed	1780 rpm	Service Factor	1.15
Frame	225\$	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	93 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	115.0/57.5 A	Power Factor	86.5
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	J
Drive End Bearing Size	6313	Opp Drive End Bearing Size	6313
UL	No	CSA	N
CE	Υ	IP Code	55
Number of Speeds	1		


Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Part Wdg Start & Wye Start Delta Run Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.155 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	IEC	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	B-SS620369	Connection Drawing	A-EE7308AA

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/07/2024

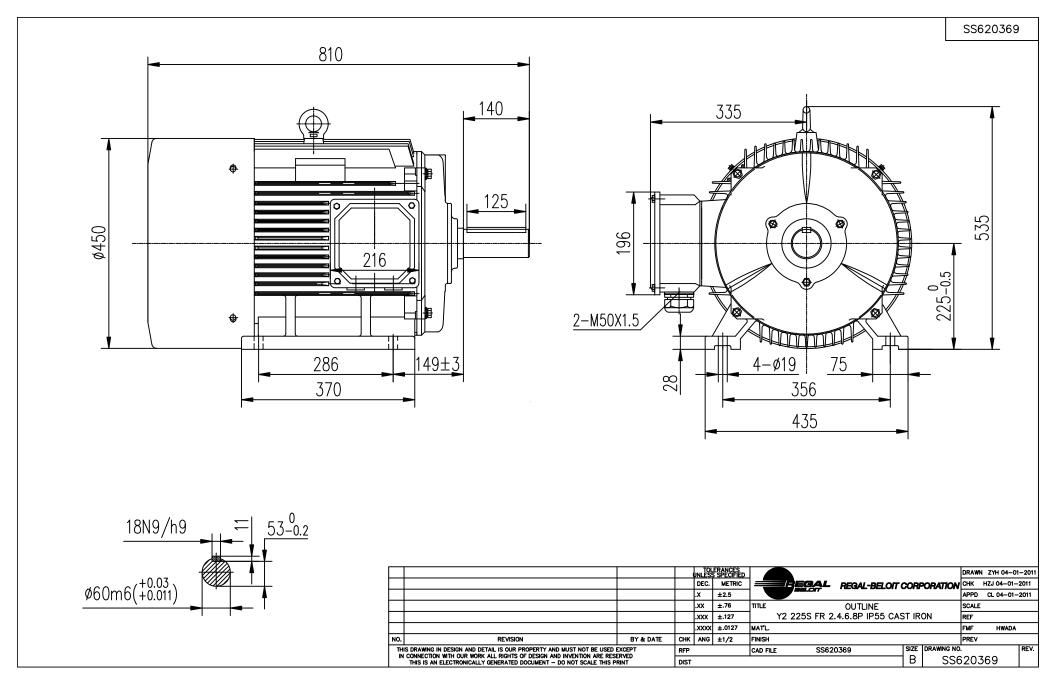

Uncontrolled Copy - T6 (W2) - T9 (W3) - T12 (W4) - T1 (U1) - T4 (U2) T7 (U3) T10 (U4) T2 (V1) T8 T5 Ti 111 T5 (V2) - T8 (V3) - T11 (V4) - T3 (W1) VIEW OF TERMINAL END DRAWN BY LZ REGAL Regal Beloit America, Inc. 01-12-1994 APPROVED BY DESCRIPTION GK CONN DIAGRAM-EXTERNAL DATE 3Ø-2/1 DELTA-12 LEADS 01-14-1994

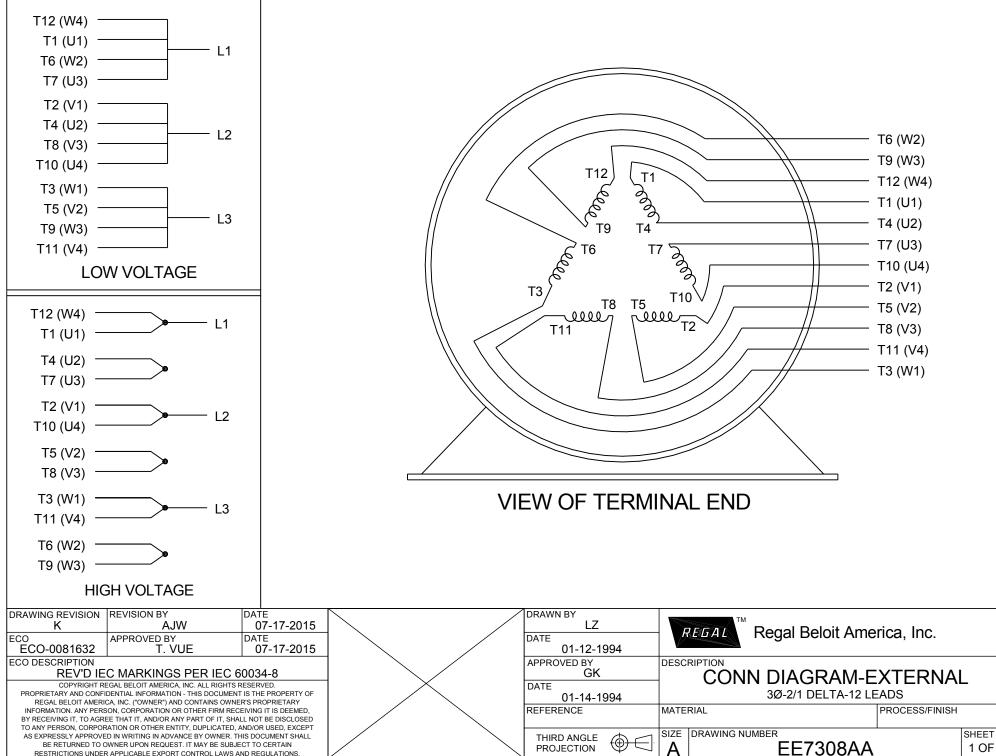

PROJECTION

RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS

1 OF 1