PRODUCT INFORMATION PACKET



Model No: 254THTPA8094 Catalog No: 254THTPA8094 7 1/2,1200,TENV,254TD,3/60/230/460






Nameplate Specifications

Phase	3	Output HP	7.50 Hp
Output KW	5.6 kW	Voltage	230/460 V
Speed	1150 rpm	Service Factor	1
Frame	254TD	Enclosure	Totally Enclosed Non Ventilated
Thermal Protection	Thermostat	Efficiency	84 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	22.0/11.0 A	Power Factor	75
Duty	60 Minute	Insulation Class	Н
Design Code	Α	KVA Code	G
Drive End Bearing Size	309	Opp Drive End Bearing Size	309
UL	No	CSA	Υ
IP Code	43	Number of Speeds	1

Technical Specifications

Electrical Type	Squirrel Cage Inverter Duty	Starting Method	Inverter Only
Poles	6	Rotation	Reversible
Resistance Main	1.81 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	B-SS203711-1175	Connection Drawing	A-EE7308T

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/07/2024

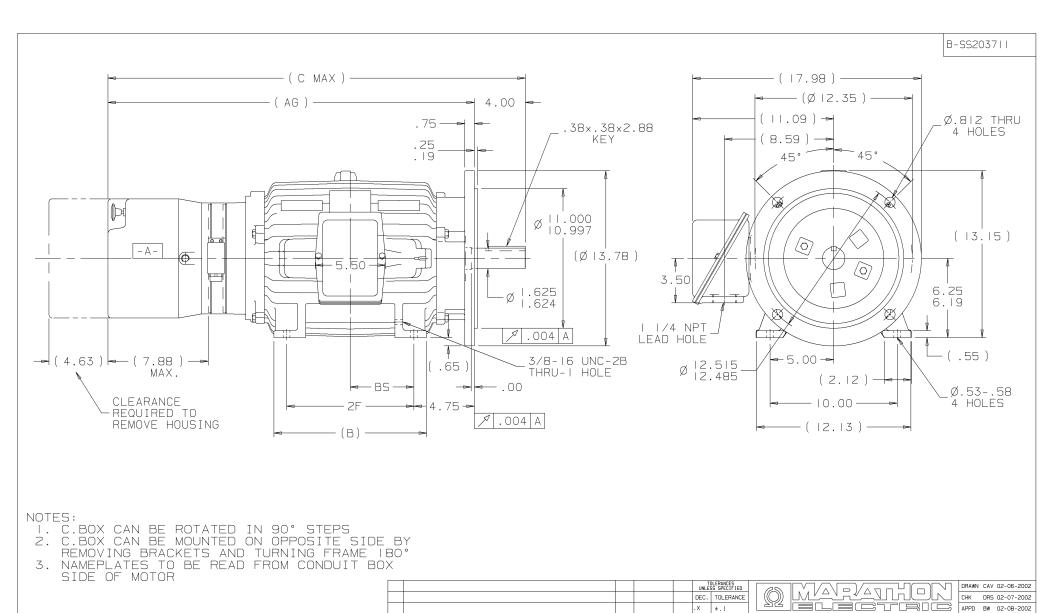

DASH

1175

1350

FRAME

254TD

C MAX

0.25 31.03

256TD | 12.00 | 32.78

2F

8.25

10.00

BS

4.12

5.00

ΑG

27.03

28.78

NEW DRAWING MU40443

REVISION

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

DIST WA - LB - WP - LXI - BP - BY

.xx ±.03

.xxx ±.005

CHK ANG ± 7'30"

PURCHASED

CAV 02-08-2002 BW .XXXX ±.0005

BY DATE

TITLE OUTLINE TENV D'FLANGE CAST C'BOX

SURFACE ROUGHNESS MAT'L.
UNLESS SPECIFIED FINISH

CAD FILE SS203711 SHOP BOOK

250TD FR STEARNS 87.000 BRAKE SL 85 TACH.

SCALE

REV.

SIZE DRAWING NO.

B SS203711

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval-STACK:

/im

-savelevel-

